PLAT OF .023 ACRE TRACT FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being part of the North half of the Southwest quarter of Section 11, Township 12, Range 18.

N69º12'10"E. 5.91' APPROVED FOR IMANSFER BY HOCKING COUNTY ENGINEER'S OFFICE NW CORNER DATE LOT 231 Approved - Mathematically Hocking County Engineer's office SURD B) Th Aw Date 3-17-89 CONDITIONAL APPROVAL/TRANSFER-Not to be used as separate building site or transferred as an independent parcel in the HAVEN HOLLOW future without Planning Commission and/or health Dept. approval. SCALE: 20' THE REAL PROPERTY. SUMMIT LEGEND: 118-432 18°42'00"W -175. 5/8" iron pin with 1-1/4" plastic ID cap previously 5 W 231 CRE 107 Harry HONA 175 REFERENCES: W, n Tax maps Previous surveys Existing monumentation Platted subdivision REFERENCE BEARING: CORNER Revised plat of Summit Haven Hollow Subdivision. I 569°12'10"W-5.91' α 0 2

I hereby certify that an office survey was done on the 16th day of March, 1989 from an actual survey made under my supervision of the premises shown hereon on the 2nd day of May, 1988 and that the plat is a correct representation of the premises as described by said survey.

Registered Surveyor No. 6344

Situated in Laurel Township, Hocking County, Ohio; being part of the North half of the Southwest quarter of Section 11. Township 12,

Range 18; and being more particularly described as follows:

Beginning at a 5/8" iron pin previously set at the Northwest corner of Lot 231 of Summit Haven Hollow Subdivision as recorded in Plat Book E, Page 10, and revised in Plat Book G, Page 55, Hocking County Recorder's Office; thence with the West line of said Lot 231 South 8 degrees 42 minutes 00 seconds East a distance of 175.00 to a 5/8" iron pin previously set at the Southwest corner of said Lot 231; thence South 69 degrees 12 minutes 10 seconds West a distance of 5.91 feet to a point; thence North 8 degrees 42 minutes 00 seconds West a distance of 175.00 feet to a point; thence North 69 degrees 12 minutes 10 seconds East a distance of 5.91 feet to the point of beginning containing .023 acres more or less, subject to any private

The above .023 acre survey is intended to describe part of a remaining 223.748 acre tract of land belonging to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the revised plat of Summit Haven Hollow Subdivision. All iron pins previously set by this survey are capped by a 1-1/4" plastic identification cap. The above described property description was office written on March 16, 1989 from an actual field survey by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on May 2, 1988.

GERSTNER UNVE *************

APPROVED FOR LANSFER BY HOCKING COUNTY ENGINEER'S OFFICE


Tany P. Ventra

__ DATE_

Approved - Mathematically Hocking County Engineer's office By 7/1 AW Date 3-17-89

CONDITIONAL APPROVAL/TRANSFER-Not to be used as separate building site or transferred as an independent parcel in the future without Planning Commission and/or health Dept approval.
Survey by:

PLAT OF A 41.293 ACRE TRACT FOR TOM LLOYD

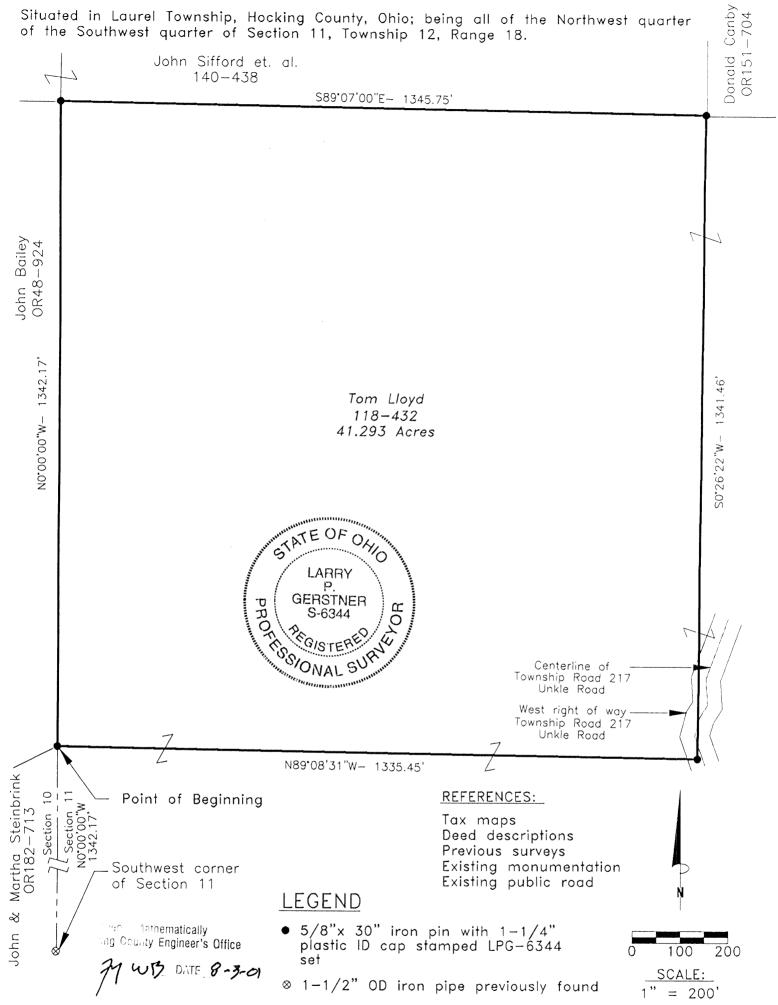

REFERENCE BEARING:

West line of Section 11 as North 0 degrees 00 miutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 31st day of July, 2001 and that the plat is a correct representation of the premises as described by said survey.

Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner — Engineering and Surveying 9 East Second Street, Suite A, Logan, Ohio 43138 (740) 385—4260

SURVEY DESCRIPTION OF A 41.293 ACRE TRACT FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of the Northwest quarter of the Southwest quarter of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a 1-1/2" OD iron pipe previously found at the Southwest corner of Section 11; thence with the West line of Section 11 North 0 degrees 00 minutes 00 seconds West a distance of 1342.17 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence continuing with the West line of Section 11 North 0 degrees 00 minutes 00 seconds West a distance of 1342.17 feet to a 5/8" iron pin set;

thence leaving the West line of Section 11 South 89 degrees 07 minutes 00 seconds East a distance of 1345.75 feet to a 5/8" iron pin set;

thence South 0 degrees 26 minutes 22 seconds West a distance of 1341.46 feet to a 5/8" iron pin set:

thence North 89 degrees 08 minutes 31 seconds West a distance of 1335.45 feet to the point of beginning, containing 41.293 acres more or less, and subject to the public easement of Township Road 217, Unkle Road, and any other public or private easements of record.

The above 41.293 acre survey is intended to describe part of the various tracts as deeded to Tom Lloyd, deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 11 as North 0 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on July 31, 2001.

Troved - Mathematically using County Engineer's Office

17 WB DATE 8-3-01

Laugh Dente



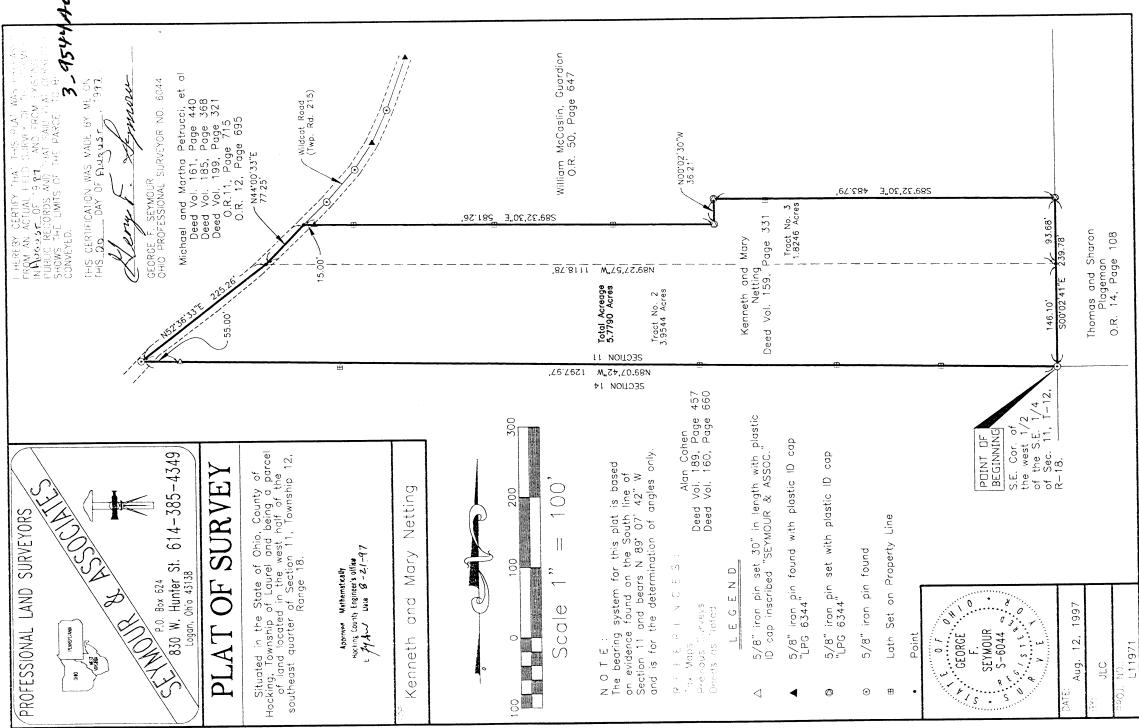


EXHIBIT "A"

Being all of the tract of land that is now or formerly in the name of Kenneth and Mary Netting as recorded in Deed Book 159 at page 331, Hocking County Recorder's Office, said tract being part of the west half of the southeast quarter of Section 11, T12N, R18W, Laurel Township, Hocking County, State of Ohio, and being more particularly described as follows:

Beginning at a 5/8" iron pin found on the southeast corner of the west half of the southeast quarter of Section 11 and the grantor's southeast corner;

Thence along the south line of Section 11 and the grantor's south line, North 89 degrees 07 minutes 42 seconds West, passing through a 5/8" X 30" iron pin with a plastic identification cap set at 1242.97 feet, going a total distance of 1297.97 feet to a 5/8" iron pin found on the grantor's southwest corner and within the right-of-way of Township Road 215;

Thence along the grantor's west line and within the right-of-way of Township Road 215 the following two courses:

- 1. North 52 degrees 36 minutes 33 seconds East a distance of 225.26 feet to a point, and;
- 2. North 44 degrees 00 minutes 33 seconds East a distance of 77.25 feet to a point being the grantor's northwest corner;

Thence leaving said road and along the grantor's north line the following three courses:

- 1. South 89 degrees 32 minutes 30 seconds East, passing through a 5/8" iron pin with a plastic identification cap stamped "L.P.G.-6344" found at 15.00 feet, going a total distance of 581.26 feet to a 5/8" X 30" iron pin with a plastic identification cap stamped "LPG-6344" set;
- 2. North 00 degrees 02 minutes 30 seconds West a distance of 36.21 feet to a 5/8" X 30" iron pin with a plastic identification cap stamped "LPG-6344" set, and;
- 3. South 89 degrees 32 minutes 30 seconds East a distance of 483.79 feet to a 5/8" X 30" iron pin with a plastic identification cap stamped "L.P.G." FOUND-6344" set on the east line of the west half of the southeast quarter and the grantor's northeast corner;

Thence along the grantor's east line and the east line of the west half of the southeast quarter, South 00 degrees 02 minutes 30 seconds East a distance of 239.78 feet to the place of beginning, containing 5.7790 acres, more or less, and subject to the right-of-way of Township Road 215 and all easements of record.

All 5/8" X 30" iron pins with plastic identification caps set are stamped "Seymour & Associates" unless otherwise noted.

The bearings used in the above described tract were based on the south line of Section 11 as bearing North 89 degrees 07 minutes 42 seconds West and are for the determination of angles only.


The above described tract was surveyed by George F. Seymour, Ohio Professional Surveyor No. 6044, in August of 1997.



Approved Mathematically
Hocking County Engineer's office
By MAW Date 3-21-97

PLAT OF 5.00 ACRE TRACT FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being part of the Northwest quarter of the Southeast quarter of Section 11, Township 12, Range 18.

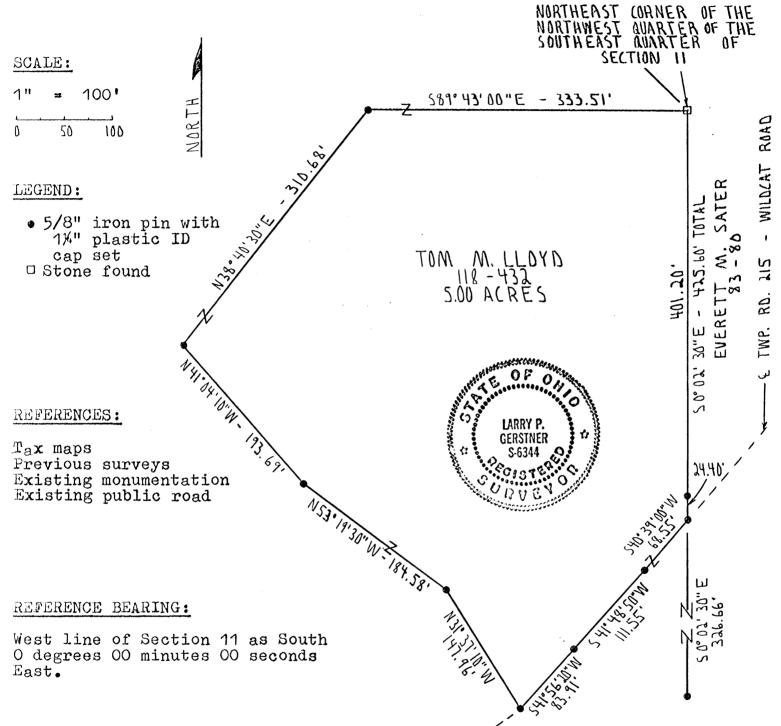

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 12th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By FN Date 12-17-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF 5.00 ACRE TRACT FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being part of the Northwest quarter of the Southeast quarter of Section 11, Township 12, Range 18; and being more particularly described as follows:

Beginning at a stone found at the Northeast corner of the

Northwest quarter of the Southeast quarter of Section 11;

thence South 0 degrees 02 minutes 30 seconds East a distance of 425.60 feet to a 5/8" iron pin set in the center of Township Road 215, Wildcat Road, passing a 5/8" iron pin set at a distance of 401.20 feet and from which a 5/8" iron pin set bears South 0 degrees 02 minutes 30 seconds East at a distance of 326.66 feet;

thence with the center of said Township Road 215 the

following three bearings and distances:

1) South 40 degrees 39 minutes 00 seconds West a distance of 68.55 feet to a 5/8" iron pin set;

2) South 41 degrees 48 minutes 50 seconds West a distance

of 111.55 feet to a 5/8" iron pin set;

3) South 41 degrees 56 minutes 20 seconds West a distance

of 83.91 feet to a 5/8" iron pin set;

thence leaving the center of said Township Road 215 North 31 degrees 37 minutes 10 seconds West a distance of 147.96 feet to a 5/8" iron pin set;

thence North 53 degrees 19 minutes 30 seconds West a

distance of 184.58 feet to a 5/8" iron pin set;

thence North 41 degrees 04 minutes 10 seconds West a distance of 193.69 feet to a 5/8" iron pin set;

thence North 38 degrees 40 minutes 30 seconds East a

distance of 310.68 feet to a 5/8" iron pin set;

thence South 89 degrees 43 minutes 00 seconds East a distance of 333.51 feet to the point of beginning containing 5.00 acres more or less, subject to the public easement of said Township Road 215 and any private easements of record.

The above 5.00 acre survey is intended to describe part of the Northwest quarter of the Southeast quarter of Section 11 as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 12, 1991.

Approved • Mathematically
Hocking County Engineer's office
By County Date 2-17-9/

Survey by:


Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

Tany P. Verster



PLAT OF .486 ACRE LOT 241 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD Summit Haven

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 241 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

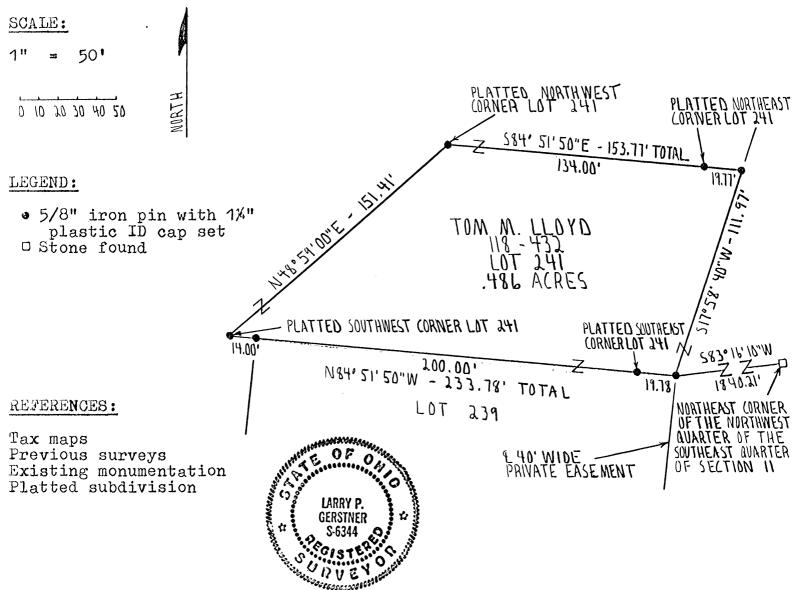

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By MACO Date 12-26-9/

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .486 ACRE LOT 241 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; all of Lot 241 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 83 degrees 16 minutes 10 seconds West a distance of 1840.21 feet to a 5/8" iron pin set at Southeast corner of said Lot 241 and being the point

Beginning of the tract of land to be described;

thence with the South line of said Lot 241 North degrees 51 minutes 50 seconds West a distance of 233.78 feet a 5/8" iron pin set at the platted Southwest corner of said Lot 241 and passing a 5/8" iron pin set at the platted Southeast corner of said Lot 241 at a distance of 19.78 feet and a 5/8" iron pin set at a distance of 219.78 feet;

thence with the Northwest line of said Lot 241 North degrees 59 minutes 00 seconds East a distance of 151.41 feet a 5/8" iron pin set at the platted Northwest corner of said Lot

241:

E BULL DO EN EN

thence with the North line of said Lot degrees 51 minutes 50 seconds East a distance of 153.77 feet a 5/8" iron pin set at the Northeast corner of said Lot 241 and passing a 5/8" iron pin set at the platted Northeast corner said Lot 241 at a distance of 134.00 feet;

thence with the East line of said Lot 241 and the center of a 40 foot wide private easement South 17 degrees 58 minutes 40 seconds West a distance of 111.97 feet to the point of beginning containing .486 acres more or less, subject to

private easements of record.

The above .486 acre survey is intended to describe all Lot 241 as extended by the recorded plat to the center of a foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from previous surveys, existing monumentation, tax maps, platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a described 1-1/4" plastic identification cap. The above property was surveyed by Larry P. Gerstner, Ohio Registered Sur OF OF LAPT Surveyor No. 6344, on December 20, 1991.


Approved - Mathematically Hocking County Engineer's office By MACO 12-26-91

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street Logan, Ohio 43138

Yany T. Versher

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 239 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, P ge 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

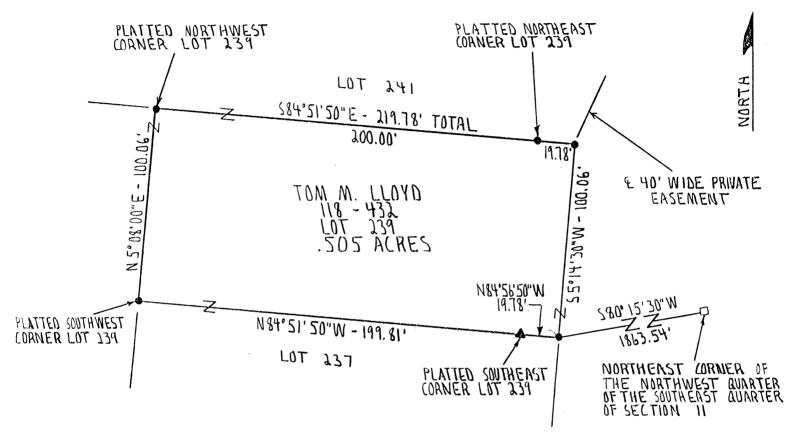

SCALE:

LEGEND:

REFERENCES:

• 5/8" iron pin with 1%"

Plastic ID cap set Previous surveys

1/2" iron pin found

Platted subdivision

REFERENCE BEARING:

50'

0 10 20 30 40 50

West line of Section 11 as South O degrees Committutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

GERSTNER

Approved • Mathematically Hocking County Engineer's office By MAWDate 12-26-91

Survey by:

SURVEY DESCRIPTION OF .505 ACRE LOT 239 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; all of Lot 239 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 80 degrees 15 minutes 30 seconds West a distance of 1863.54 feet to a 5/8" iron pin set at Southeast corner of said Lot 239 and being the point Beginning of the tract of land to be described;

239 North thence with the South line of said Lot degrees 56 minutes 50 seconds West a distance of 19.78 feet a 1/2" iron pin found at the platted Southeast corner of Lot 239;

thence continuing with the South line of said Lot North 84 degrees 51 minutes 50 seconds West a distance 199.81 feet to a 5/8" iron pin set at the platted Southwest corner of said Lot 239;

thence with the West line of said Lot 239 North 5 degrees 08 minutes 00 seconds East a distance of 100.06 feet to a iron pin set at the platted Northwest corner of said Lot 239;

thence with the North line of said Lot 239 South degrees 51 minutes 50 seconds East a distance of 219.78 feet a 5/8" iron pin set at the Northeast corner of said Lot 239 and passing a 5/8" iron pin set at the platted Northeast corner said Lot 239 at a distance of 200.00 feet;

thence with the East line of said Lot 239 and the center of a 40 foot wide private easement South 5 degrees 14 minutes 30 seconds West a distance of 100.06 feet to the point beginning containing .505 acres more or less, subject to private easements of record.

The above .505 acre survey is intended to describe all Lot 239 as extended by the recorded plat to the center of a foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered LAPPO" Surveyor No. 6344, on December 20, 1991.


Approved • Mathematically Hocking County Engineer's office By MACOate 12-26-91

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

Jany V. Renton

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 238 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

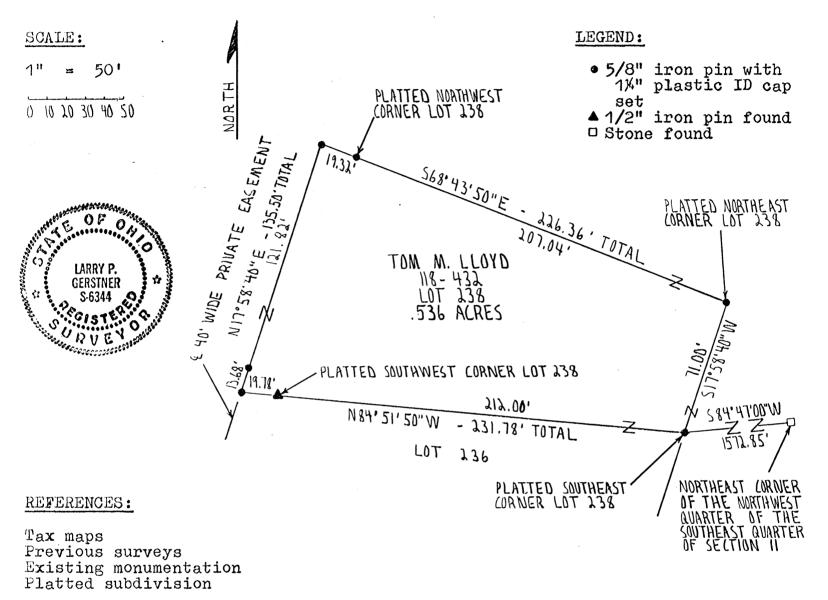

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 17th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By 2 FN Date 12-19-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .536 ACRE LOT 238 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 238 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 84 degrees 47 minutes 00 seconds West a distance of 1572.85 feet to a 5/8" iron pin set at the platted Southeast corner of said Lot 238 and being the point of Beginning of the tract of land to be described:

thence with the South line of said Lot 238 North 84 degrees 51 minutes 50 seconds West a distance of 231.78 feet to a 5/8" iron pin set at the Southwest corner of said Lot 238 and passing a 1/2" iron pin found at the platted Southwest corner of said Lot 238 at a distance of 212.00 feet;

thence with the West line of said Lot 238 and the center of a 40 foot wide private easement North 17 degrees 58 minutes 40 seconds East a distance of 135.50 feet to a 5/8" iron pin set at the Northwest corner of said Lot 238 and passing a 5/8" iron pin set at a distance of 13.68 feet;

thence with the North line of said Lot 238 South 68 degrees 43 minutes 50 seconds East a distance of 226.36 feet to a 5/8" iron pin set at the platted Northeast corner of said Lot 238 and passing a 5/8" iron pin set at the platted Northwest corner of said Lot 238 at a distance of 19.32 feet;

thence with the East line of said Lot 238 South 17 degrees 58 minutes 40 seconds West a distance of 71.00 feet to the point of beginning containing .536 acres more or less, subject to any private easements of record.

The above .536 acre survey is intended to describe all of Lot 238 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 17, 1991.


Approved • Mathematically
Hocking County Engineer's office
By Par Par Date 1279-17

OF OAR

GERSTNER

Survey by:

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 237 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

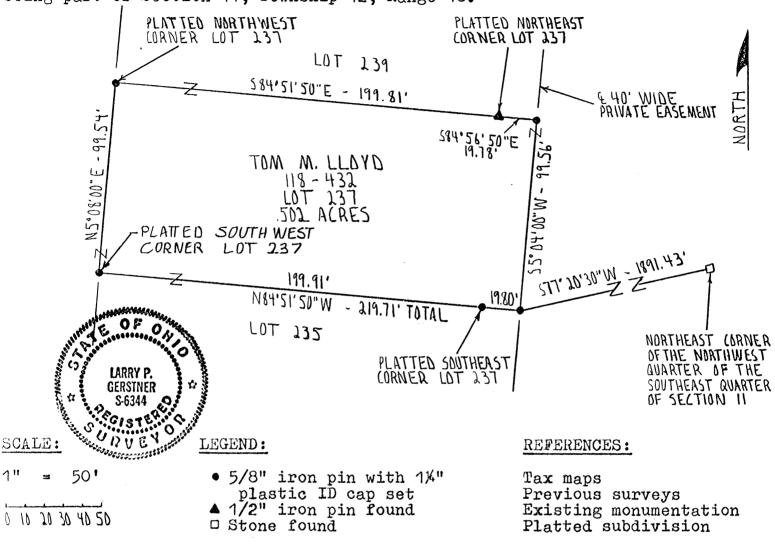

REPERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved - Mathematically
Hocking County Engineer's office
By MACODate 12-26-9/

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .502 ACRE LOT 237 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; all of Lot 237 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 77 degrees 20 minutes 30 seconds West a distance of 1891.43 feet to a 5/8" iron pin set at Southeast corner of said Lot 237 and being the point Beginning of the tract of land to be described;

84 thence with the South line of said Lot 237 North degrees 51 minutes 50 seconds West a distance of 219.71 feet to a 5/8" iron pin set at the platted Southwest corner of said Lot 237 and passing a 5/8" iron pin set at the platted Southeast corner of said Lot 237 at a distance of 19.80 feet;

thence with the West line of said Lot 237 North 5 degrees 08 minutes 00 seconds East a distance of 99.54 feet to a 5/8" iron pin set at the platted Northwest corner of said Lot 237;

thence with the North line of said Lot 237 South degrees 51 minutes 50 seconds East a distance of 199.81 feet a 1/2" iron pin found at the platted Northeast corner of Lot 237:

thence continuing with the North line of said Lot South 84 degrees 56 minutes 50 seconds East a distance of 19.78 feet to a 5/8" iron pin set at the Northeast corner of said Lot 237:

the center thence with the East line of said Lot 237 and of a 40 foot wide private easement South 5 degrees 04 minutes 00 seconds West a distance of 99.56 feet to the point beginning containing .502 acres more or less, subject to private easements of record.

The above .502 acre survey is intended to describe all Lot 237 as extended by the recorded plat to the center of a foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 20, 1991. Million Constitution of the Constitution of th

Approved - Mathematically Hocking County Engineer's office -By MACOato 12-26-91

OF ON

ANT PARE

()

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

Harry P- Verston

PLAT OF .510 ACRE LOT 236 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 236 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

SCALE:

1" = 501

0 10 20 30 40 50

NORTH

LEGEND:

• 5/8" iron pin with 1¼" plastic ID cap set


▲ 1/2" iron pin found

□ Stone found



REFERENCES:

Tax maps
Previous surveys
Existing monumentation
Platted subdivision

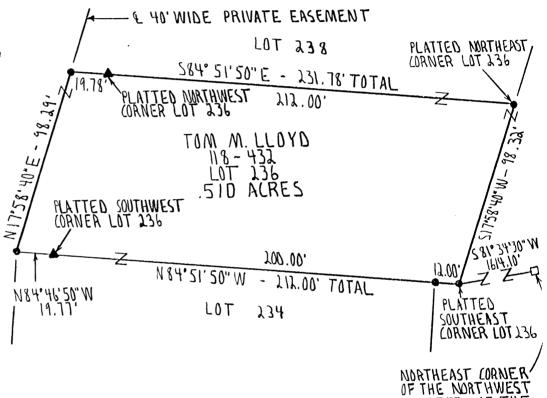

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 17th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By - TX _ Date [2-19-9]

Registered Surveyor No. 6344

QUARTER OF THE SOUTHEAST QUARTER OF SECTION II

Survey by:

SURVEY DESCRIPTION OF .510 ACRE LOT 236 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 236 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter Section 11; thence South 81 degrees 34 minutes 30 seconds West a distance of 1614.10 feet to a 5/8" iron pin set at platted Southeast corner of said Lot 236 and being the point Beginning of the tract of land to be described;

thence with the South line of said Lot 236 84 degrees 51 minutes 50 seconds West a distance of 212.00 feet a 1/2" iron pin found at the platted Southwest corner of Lot 236 and passing a 5/8" iron pin set at a distance of feet:

thence continuing with the South line of said Lot North 84 degrees 46 minutes 50 seconds West a distance of 19.77 feet to a 5/8" iron pin set at the Southwest corner of said Lot 236:

thence with the West line of said Lot 236 and the center of a 40 foot wide private easement North 17 degrees 58 minutes 40 seconds East a distance of 98.29 feet to a 5/8" iron pin at the Northwest corner of said Lot 236;

thence with the North line of said Lot 236 South degrees 51 minutes 50 seconds East a distance of 231.78 feet to a 5/8" iron pin set at the platted Northeast corner of said Lot 236 and passing a 1/2" iron pin found at the platted Northwest corner of said Lot 236 at a distance of 19.78 feet;

thence with the East line of said Lot 236 South 17 degrees 58 minutes 40 seconds West a distance of 98.32 feet point of beginning containing .510 acres more or less, subject to any private easements of record.

The above .510 acre survey is intended to describe all Lot 236 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Daug P. Weiske Co. LARRY P. GERSTNER


by:
neering and C Surveyor No. 6344, on December 17, 1991.

Approved - Mathematically Hocking County Engineer's office By K-FH Date 12-19-91

Survey by:

PLAT OF .502 ACRE LOT 235 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD Summit Haven Lot235

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 235 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

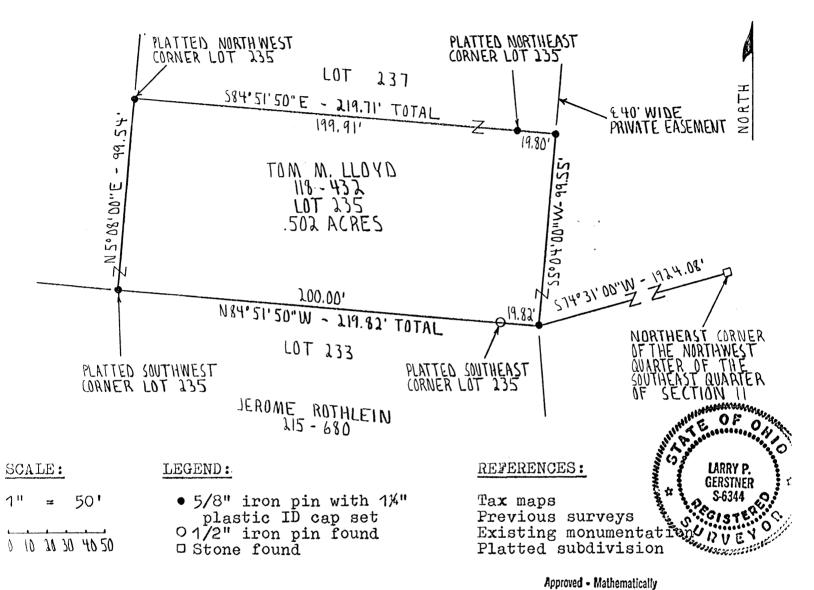

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Registered Surveyor No. 6344

Hocking County Engineer's office
By ### Date 1≥-26-9/

Survey by:

SURVEY DESCRIPTION OF .502 ACRE LOT 235 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 235 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 74 degrees 31 minutes 00 seconds West a distance of 1924.08 feet to a 5/8" iron pin set at the Southeast corner of said Lot 235 and being the point of Beginning of the tract of land to be described;

thence with the South line of said Lot 235 North 84 degrees 51 minutes 50 seconds West a distance of 219.82 feet to a 5/8" iron pin set at the platted Southwest corner of said Lot 235 and passing a 1/2" iron pin found at the platted Southeast corner of said Lot 235 at a distance of 19.82 feet;

thence with the West line of said Lot 235 North 5 degrees 08 minutes 00 seconds East a distance of 99.54 feet to a 5/8" iron pin set at the platted Northwest corner of said Lot 235;

thence with the North line of said Lot 235 South 84 degrees 51 minutes 50 seconds East a distance of 219.71 feet to a 5/8" iron pin set at the Northeast corner of said Lot 235 and passing a 5/8" iron pin set at the platted Northeast corner of said Lot 235 at a distance of 199.91 feet;

thence with the East line of said Lot 235 and the center of a 40 foot wide private easement South 5 degrees 04 minutes 00 seconds West a distance of 99.55 feet to the point of beginning containing .502 acres more or less, subject to any private easements of record.

The above .502 acre survey is intended to describe all of Lot 235 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 20, 1991.


Approved • Mathematically
Hocking County Engineer's office
By Account 12-26-91

Thillippe of the consequence of

PROPRESENTATION OF THE PARTY OF

Survey by:

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 234 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

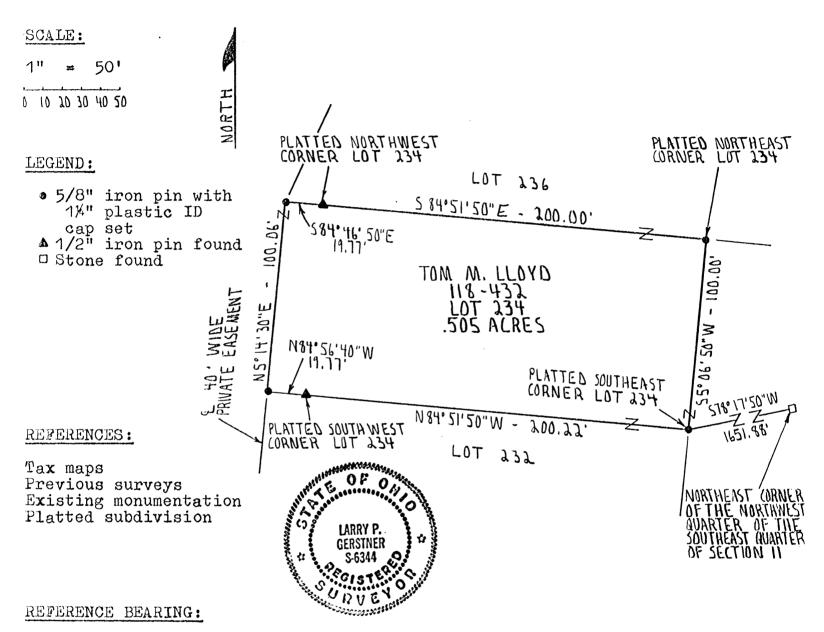

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 17th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By Date Date

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .505 ACRE LOT 234 OF

SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, all of Lot 234 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 78 degrees 17 minutes 50 seconds West a distance of 1651.88 feet to a 5/8" iron pin set at platted Southeast corner of said Lot 234 and being the point Beginning of the tract of land to be described:

thence with the South line of said Lot 234 North degrees 51 minutes 50 seconds West a distance of 200.22 feet a 1/2" iron pin found at the platted Southwest corner of Lot 234:

thence continuing with the South line of said Lot North 84 degrees 56 minutes 40 seconds West a distance of feet to a 5/8" iron pin set at the Southwest corner of said Lot

thence with the West line of said Lot 234 and the center of a 40 foot wide private easement North 5 degrees 14 minutes 30 seconds East a distance of 100.06 feet to a 5/8" iron pin set at the Northwest corner of said Lot 234;

thence with the North line of said Lot 234 South degrees 46 minutes 50 seconds East a distance of 19.77 a 1/2" iron pin found at the platted Northwest corner Lot 234:

thence continuing with the North line of said Lot South 84 degrees 51 minutes 50 seconds East a distance of 200.00 feet to a 5/8" iron pin set at the platted Northeast corner of said Lot 234;

thence with the East line of said Lot 234 South 5 06 minutes 50 seconds West a distance of 100.00 feet point of beginning containing .505 acres more or less, subject to any private easements of record.


The above .505 acre survey is intended to describe all Lot 234 as extended by the recorded plat to the center of a foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes seconds East. All iron pins set by this survey are capped by 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered described 1 Herriconstanting Surveyor No. 6344, on December 17, 1991.

Approved - Mathematically Hocking County Engineer's office By Date 12-19-17

Lauy 1. Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260 LARRY P.

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 232 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

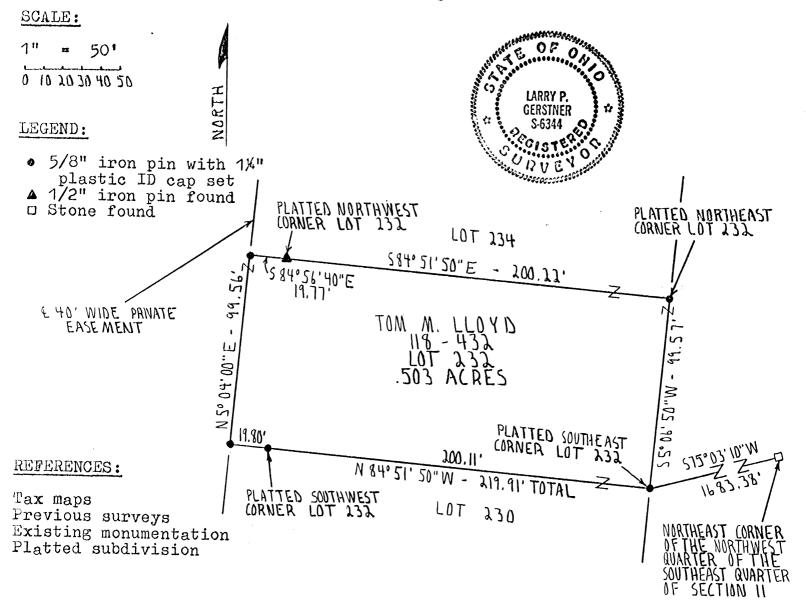

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 17th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By Property Date 12-19-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .503 ACRE LOT 232 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 232 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11. Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 75 degrees 03 minutes 10 seconds West a distance of 1683.38 feet to a 5/8" iron pin set at the platted Southeast corner of said Lot 232 and being the point of

Beginning of the tract of land to be described:

thence with the South line of said Lot 232 North 84 degrees 51 minutes 50 seconds West a distance of 219.91 feet to a 5/8" iron pin set at the Southwest corner of said Lot 232 and passing a 5/8" iron pin set at the platted Southwest corner of said Lot 232 at a distance of 200.11 feet;

thence with the West line of said Lot 232 and the center of a 40 foot wide private easement North 5 degrees 04 minutes 00 seconds East a distance of 99.56 feet to a 5/8" iron pin set at the Northwest corner of said Lot 232;

thence with the North line of said Lot 232 South 84 degrees 56 minutes 40 seconds East a distance of 19.77 feet to a 1/2" iron pin found at the platted Northwest corner of said Lot 232;

thence continuing with the North line of said Lot 232 South 84 degrees 51 minutes 50 seconds East a distance of 200.22 feet to a 5/8" iron pin set at the platted Northeast corner of said Lot 232;

thence with the East line of said Lot 232 South 5 degrees 06 minutes 50 seconds West a distance of 99.57 feet to the point of beginning containing .503 acres more or less. subject

to any private easements of record.

The above .503 acre survey is intended to describe all of Lot 232 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 17, 1991.

Approved • Mathematically
Hocking County Engineer's office
By Date 12 19-9/

GERSTNER


EY O

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

Lang P. Verster

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 230 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

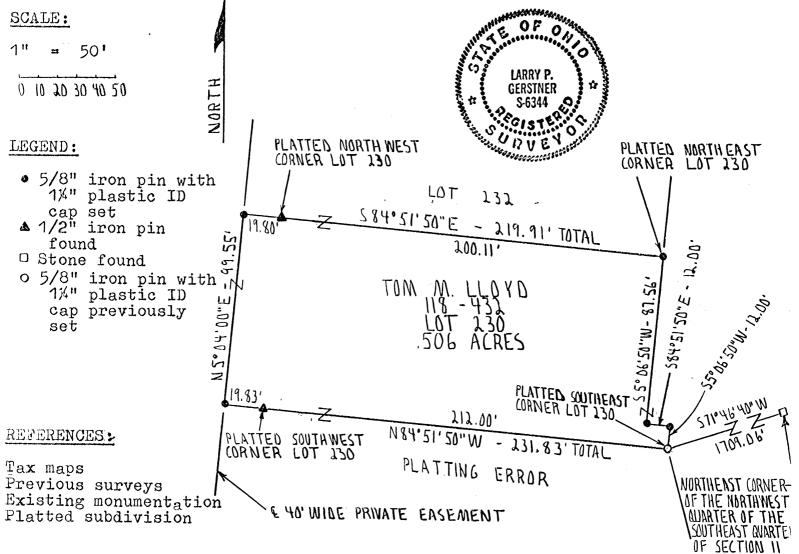

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 17th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By 2 1991
Date 12-1991

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .506 ACRE LOT 230 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; all of Lot 230 as extended to the center of a 40 foot recorded private easement of Summit Haven Subdivision as Plat Book E, Page 10, Hocking County Recorder's Office; part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter Section 11; thence South 71 degrees 46 minutes 40 seconds West a distance of 1709.06 feet to a 5/8" iron pin previously set at the platted Southeast corner of said Lot 230 and being the point of Beginning of the tract of land to be described:

thence with the South line of said Lot 230 North degrees 51 minutes 50 seconds West a distance of 231.83 feet a 5/8" iron pin set at the Southwest corner of said Lot 230 passing a 1/2" iron pin found at the platted Southwest of said Lot 230 at a distance of 212.00 feet:

thence with the West line of said Lot 230 and the center of a 40 foot wide private easement North 5 degrees 04 minutes 00 seconds East a distance of 99.55 feet to a 5/8" iron pin at the Northwest corner of said Lot 230:

thence with the North line of said Lot 230 South degrees 51 minutes 50 seconds East a distance of 219.91 feet a 5/8" iron pin set at the platted Northeast corner of said 232 and passing a 5/8" iron pin set at the platted Northwest corner of said Lot 230 at a distance of 19.80 feet;

thence with the East line of said Lot 230 South 5 06 minutes 50 seconds West a distance of 87.56 feet to a 5/8" iron pin set:

thence South 84 degrees 51 minutes 50 seconds East distance of 12.00 feet to a 5/8" iron pin set;

thence South 5 degrees 06 minutes 50 seconds distance of 12.00 feet to the point of beginning containing .506 acres more or less, subject to any private easements record.

The above .506 acre survey is intended to describe all Lot 230 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes seconds East. All iron pins set by this survey or previously set are capped by a 1-1/4" plastic identification cap. above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 17, 1991. THE OF ONE

Approved - Mathematically Hocking County Engineer's office By K-FN Date 1219-91


Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

LARRY P. GERSTNER

LAUREL 1

PLAT OF .478 ACRE LOT 227 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR JOHN DODSON Situated in Laurel Township, Hocking County, Ohio; being all of Lot 227 of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

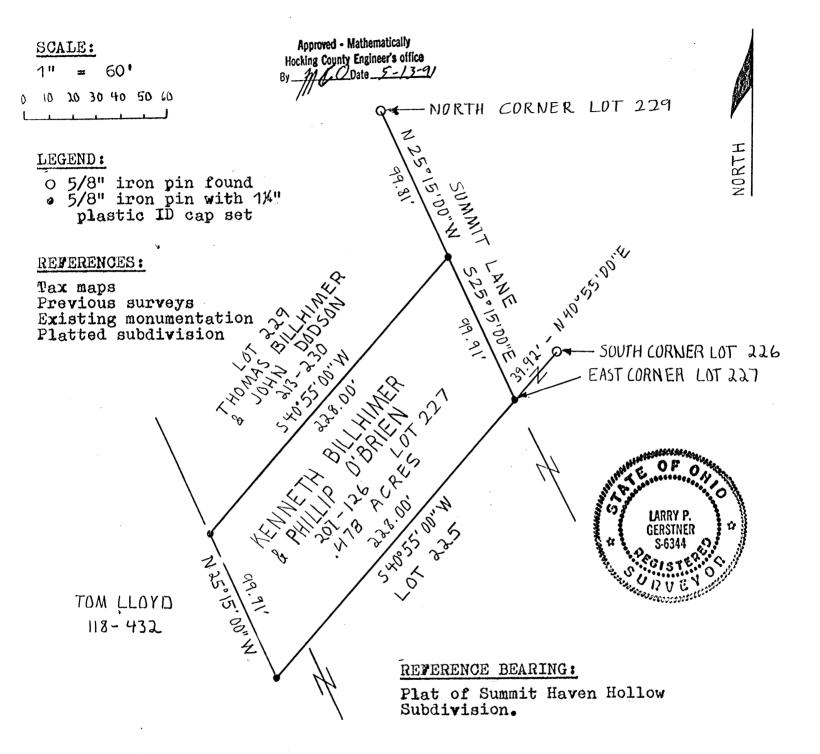

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 10th day of May, 1991 and that the plat is a correct representation of the premises as described by said survey.

Registered Surveyor No. 6344

SURVEY DESCRIPTION OF .478 ACRE LOT 227 OF

SUMMIT HAVEN HOLLOW SUBDIVISION FOR JOHN DODSON

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 227 of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Beginning at a 5/8" iron pin set at the East corner of said Lot 227 from which a 5/8" iron pin found at the South corner of Lot 226 of the same subdivision bears North 40 degrees 55 minutes 00 seconds East at a distance of 39.92 feet;

thence with the Southeast line of said Lot 227 South 40 degrees 55 minutes 00 seconds West a distance of 228.00 feet to a 5/8" iron pin set South corner of said Lot 227;

thence with the Southwest line of said Lot 227 North 25 degrees 15 minutes 00 seconds West a distance of 99.91 feet to a 5/8" iron pin set at the West corner of said Lot 227;

thence with the Northwest line of said Lot 227 North 40 degrees 55 minutes 00 seconds East a distance of 228.00 feet to a 5/8" iron pin set at the North corner of said Lot 227 from which a damaged 5/8" iron pin found at the North corner of Lot 229 of the same subdivision bears North 25 degrees 15 minutes 00 seconds West at a distance of 99.81 feet;

thence with the Northeast line of said Lot 227 South 25 degrees 15 minutes 00 seconds East a distance of 99.91 feet to the point of beginning containing .478 acres more or less, subject to any private easements of record.

The above .478 acre survey is intended to describe all of Lot 227 as deeded to Kenneth Billhimer and Philip O'Brien by deed reference Volume 207, Page 126, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the plat of Summit Haven Subdivision. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on May 10, 1991.


LARRY P.
GERSINER
S-6344
D V E

Vary P. Washer

Survey by:

PLAT OF .499 ACRE LOT 226 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD SUMMIT HAVEN

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 226 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

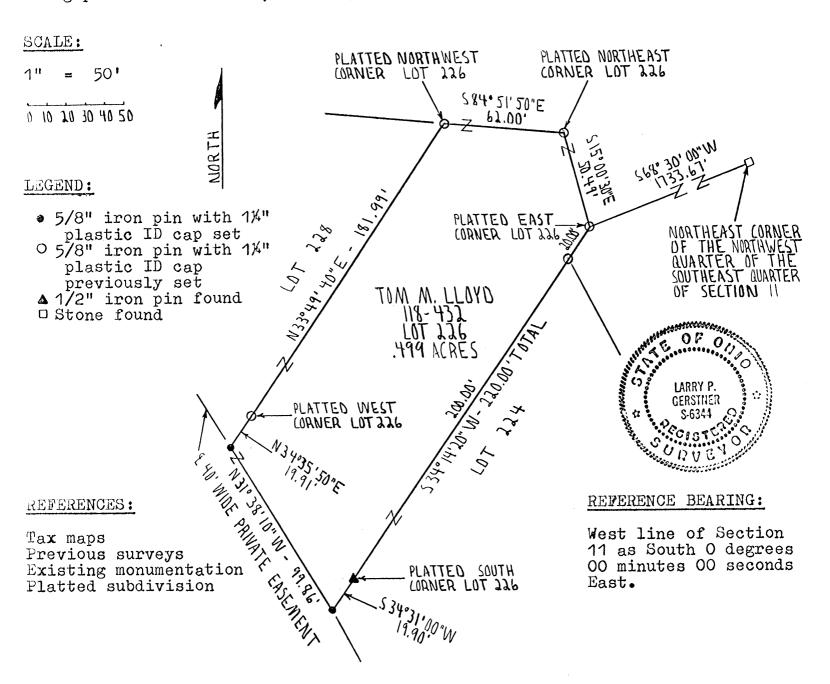

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 6th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By MANDate 12-26-9/

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .499 ACRE LOT 226 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio: being Lot 226 as extended to the center of a 40 foot wide private easement Summit Haven Subdivision as recorded in Plat Book E. Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12,

18: and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; South 68 degrees 30 minutes 00 seconds West a distance of 1733.67 thence to a 5/8" iron pin previously set at the platted East corner of said Lot 226 and being the point of Beginning of the tract of land to be described:

thence with the Southeast line of said Lot 226 South 34 degrees minutes 20 seconds West a distance of 220.00 feet to a 1/2" found at the South corner of said Lot 226 and passing a 5/8" iron pin set at a distance of 20.00 feet;

thence continuing with the Southeast line of said Lot 226 South 34 degrees 31 minutes 00 seconds West a distance of 19.90 feet to

iron pin set at the South corner of said Lot 226;

thence with the Southwest line of said Lot 226 and the center of 40 foot wide private easement North 31 degrees 38 minutes 10 seconds West a distance of 99.86 feet to a 5/8" iron pin set at the West corner of said Lot 226;

thence with the Northwest line of said Lot 226 North 34 degrees minutes 50 seconds East a distance of 19.91 feet to a 5/8"

previously set at the the platted West corner of said Lot 226;

thence continuing with the Northwest line of said Lot 226 North 33 degrees 49 minutes 40 seconds East a distance of 181.99 feet to a 5/8" iron pin previously set at the platted Northwest corner of said Lot 226:

51 thence with the North line of said Lot 226 South 84 degrees minutes 50 seconds East a distance of 62.00 feet to a 5/8" iron pin

previously set at the platted Northeast corner of said Lot 226;

thence with the Northeast line of said Lot 226 South 15 degrees minutes 30 seconds East a distance of 50.49 feet to the point beginning containing .499 acres more or less, subject to any private easements of record.

The above .499 acre survey is intended to describe all of Lot as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 6, 1991. Yang P. Verster


Approved - Mathematically Hocking County Engineer's office By MAN Date 12-26-91

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138



Situated in Laurel Township, Hocking County, Ohio; being all of Lot 225 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

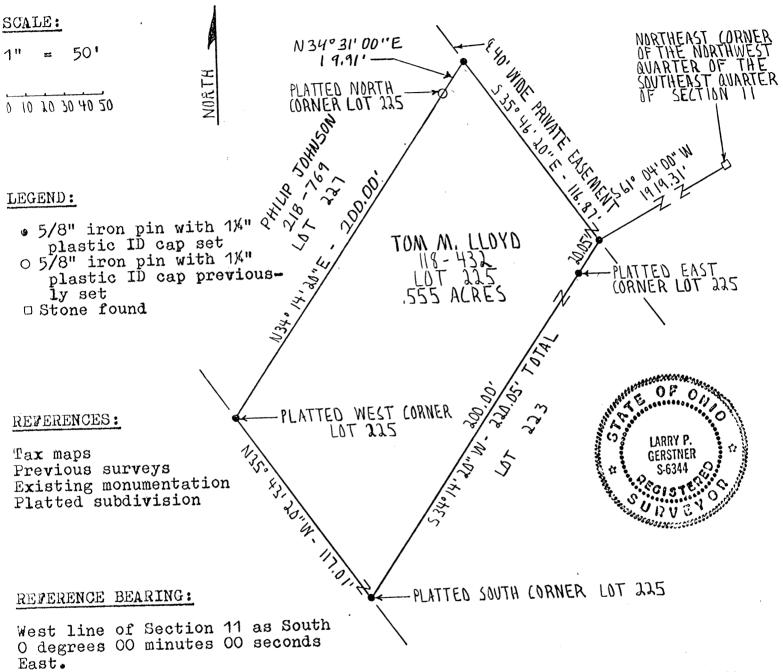

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 6th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By ### Date 12-19-4/

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .555 ACRE LOT 225 OF

SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 225 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 61 degrees 04 minutes 00 seconds West a distance of 1919.31 feet to a 5/8" iron pin set at the East corner of said Lot 225 and being the point of Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 225 South 34 degrees 14 minutes 20 seconds West a distance of 220.05 feet to a 5/8" iron pin set at the platted South corner of said Lot 225 and passing a 5/8" iron pin set at the platted East corner of said Lot 225 at a distance of 20.05 feet;

thence with the Southwest line of said Lot 225 North 35 degrees 43 minutes 20 seconds West a distance of 117.01 feet to a 5/8" iron pin set at the platted West corner of said Lot 225;

thence with the Northwest line of said Lot 225 North 34 degrees 14 minutes 20 seconds East a distance of 200.00 feet to a 5/8" iron pin previously set at the platted North corner of said Lot 225;

thence continuing with the Northwest line of said Lot 225 North 34 degrees 31 minutes 00 seconds East a distance of 19.91 feet to a 5/8" iron pin set at the North corner of said Lot 225:

thence with the Northeast line of said Lot 225 and the center of a 40 foot wide private easement South 35 degrees 46 minutes 20 seconds East a distance of 116.87 feet to the point of beginning containing .555 acres more or less, subject to any private easements of record.

The above .555 acre survey is intended to describe all of Lot 225 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 6, 1991.

Approved • Mathematically
Hocking County Engineer's office
By MAN Date 12-19-9/


OF OUR

Survey by:

Jang P. Wenter

PLAT OF .554 ACRE LOT 224 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 224 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

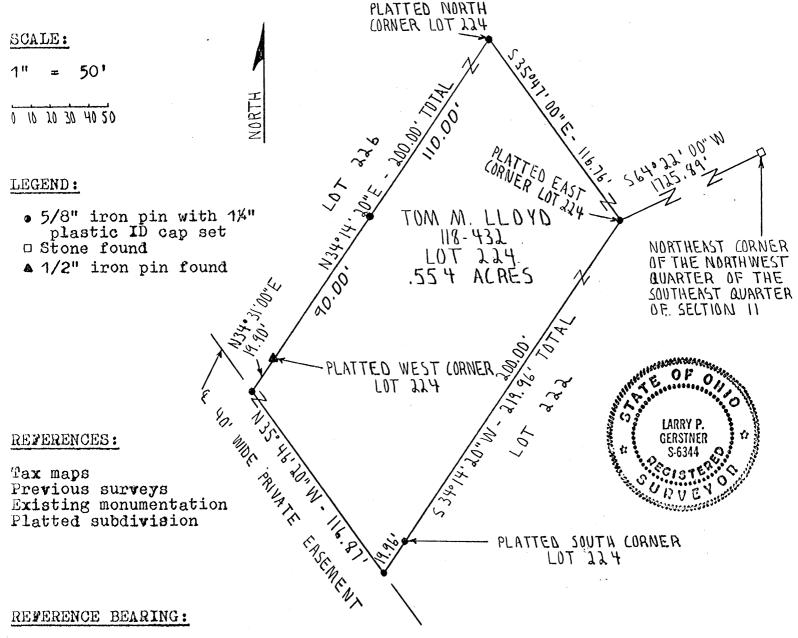

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 6th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey,

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .554 ACRE LOT 224 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; all of Lot 224 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter Section 11; thence South 64 degrees 22 minutes 00 seconds West a distance of 1725.89 feet to a 5/8" iron pin set at the platted East corner of said Lot 224 and being point the

Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 224 degrees 14 minutes 20 seconds West a distance of 219.96 feet a 5/8" iron pin set at the South corner of said Lot 224 and passing a 5/8" iron pin set at the platted South corner of Lot 224 at a distance of 200.00 feet;

thence with the Southwest line of said Lot 222 and center of a 40 foot wide private easement North 35 degrees 46 minutes 20 seconds West a distance of 116.87 feet to a 5/8" iron pin set at the West corner of said Lot 224;

thence with the Northwest line of said Lot degrees 31 minutes 00 seconds East a distance of 19.90 to a 1/2" iron pin found at the the platted West corner of said Lot 224;

thence continuing with the Northwest line of said 224 Lot North 34 degrees 14 minutes 20 seconds East a distance 200.00 feet to the platted North corner of said Lot passing a 5/8" iron pin set at a distance of 90.00 feet;

thence with the Northeast line of said Lot 224 South degrees 47 minutes 00 seconds East a distance of 116.76 feet the point of beginning containing .554 acres more or subject to any private easements of record.

The above .554 acre survey is intended to describe all Lot 224 as extended by the recorded plat to the center of a foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's This survey was based upon information obtained from Office. previous surveys, existing monumentation, platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes seconds East. All iron pins set by this survey are capped by a The above 1-1/4" plastic identification cap. prop Surve OF LARRY P property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 6, 1991.

Approved - Mathematically Hocking County Engineer's office By KIB Date 12991


Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Majo Coreet, 'San, Ohio 43138 355 1260

Lany P. Wenter

PLAT OF .549 ACRE LOT 223 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 223 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

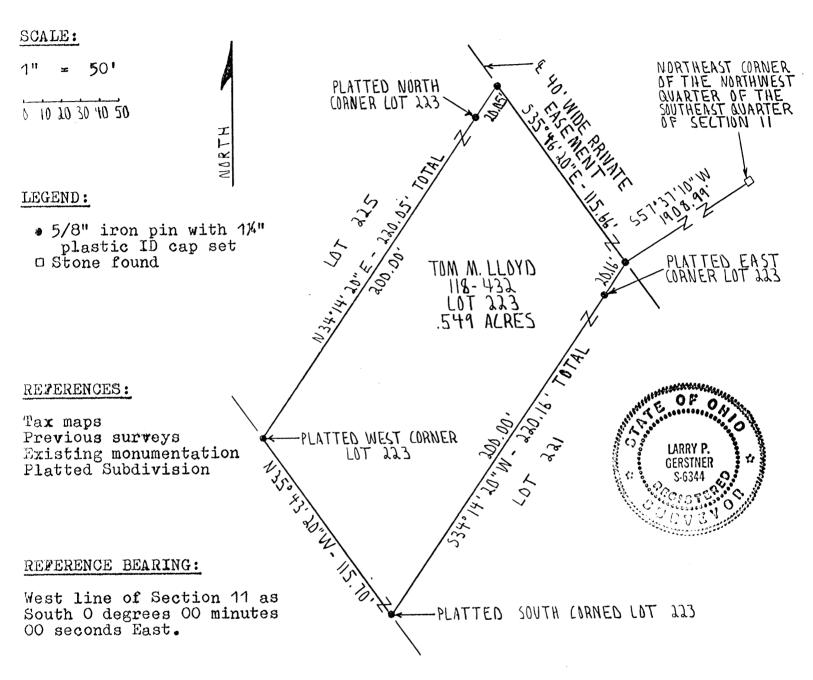

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 6th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved - Mathematically
Hocking County Engineer's office
By M Aw Date 12-18-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .549 ACRE LOT 223 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 223 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 57 degrees 37 minutes 10 seconds West a distance of 1908.99 feet to a 5/8" iron pin set at the East corner of said Lot 223 and being the point of Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 223 South 34 degrees 14 minutes 20 seconds West a distance of 220.16 feet to a 5/8" iron pin set at the platted South corner of said Lot 223 and passing a 5/8" iron pin set at the platted East corner of said Lot 223 at a distance of 20.16 feet;

thence with the Southwest line of said Lot 223 North 35 degrees 43 minutes 20 seconds West a distance of 115.70 feet to a 5/8" iron pin set at the platted West corner of said Lot 223;

thence with the Northwest line of said Lot 223 North 34 degrees 14 minutes 20 seconds East a distance of 220.05 feet to a 5/8" iron pin set at the North corner of said Lot 223 and passing a 5/8" iron pin set at the platted North corner of said Lot 223 at a distance of 200.00 feet;

thence with the Northeast line of said Lot 223 and the center of a 40 foot wide private easement South 35 degrees 46 minutes 20 seconds East a distance of 115.66 feet to the point of beginning containing .549 acres more or less, subject to any private easements of record.

The above .549 acre survey is intended to describe all of Lot 223 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 6, 1991.

Approved • Mathematically
Hocking County Engineer's office
By M Aw Date 12-18-9


Environment V E V Charles

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

Yang V. Venter

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 222 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

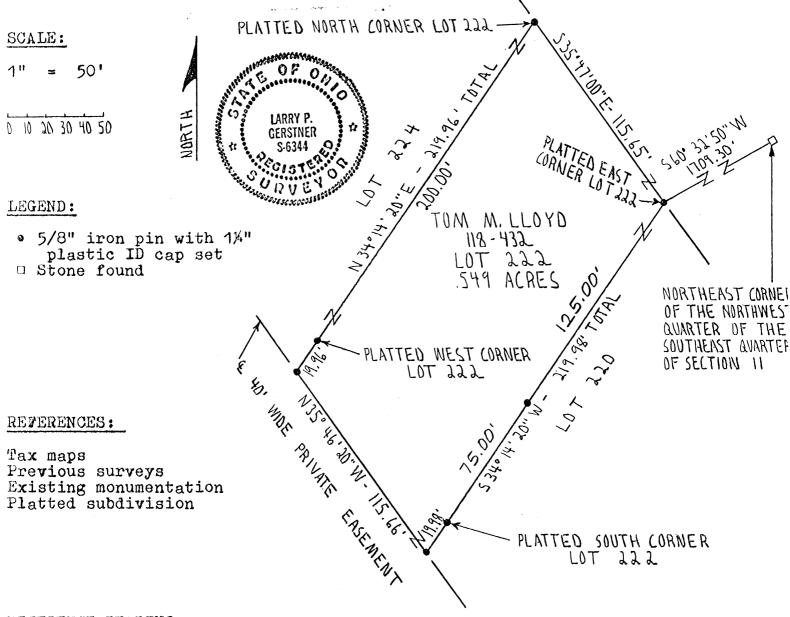

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 6th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By MACL Date 12-13-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .549 ACRE LOT 222 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio: being all of Lot 222 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 60 degrees 32 minutes 50 seconds West a distance of 1709.30 feet to a 5/8" iron pin set at the platted East corner of said Lot 222 and being the point

Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 222 South degrees 14 minutes 20 seconds West a distance of 219.98 feet a 5/8" iron pin set at the South corner of said Lot 222 and passing a 5/8" iron pin set at a distance of 125.00 feet and a 5/8" iron pin set at the platted South corner of said at a distance of 200.00 feet;

thence with the Southwest line of said Lot 222 and center of a 40 foot wide private easement North 35 degrees 46 minutes 20 seconds West a distance of 115.66 feet to a 5/8"

iron pin set at the West corner of said Lot 222;

thence with the Northwest line of said Lot 222 North degrees 14 minutes 20 seconds East a distance of 219.96 feet a 5/8" iron pin set at the platted North corner of said Lot and passing a 5/8" iron pin set at the platted West said Lot 222 at a distance of 19.96 feet;

thence with the Northeast line of said Lot 222 South 35 degrees 47 minutes 00 seconds East a distance of 115.65 feet the point of beginning containing .549 acres more or

subject to any private easements of record.

The above .549 acre survey is intended to describe all Lot 222 as extended by the recorded plat to the center of a foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's This survey was based upon information obtained from Office. tax maps, previous surveys, existing monumentation, platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes seconds East. All iron pins set by this survey are capped by a The above 1-1/4" plastic identification cap. property was surveyed by Larry P. Gerstner, Ohio Registered D. Su Su LARRY GERO Surveyor No. 6344, on December 6, 1991.


Approved - Mathematically Hocking County Engineer's office By MAC Date 12-13-91

Survey by:

Laun P. Ventrer

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 221 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

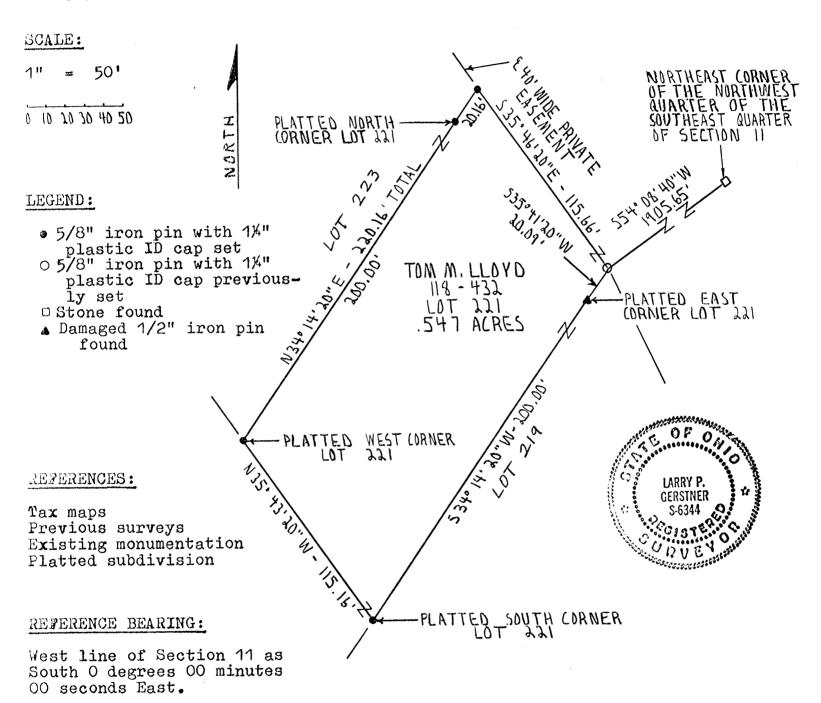

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 6th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved - Mathematically
Hocking County Engineer's office
By - Date 12-17-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .547 ACRE LOT 221 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being of a 40 foot wide all of Lot 221 as extended to the center private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 54 degrees 08 minutes 40 seconds West a distance of 1905.65 feet to a 5/8" iron pin previously set the East corner of said Lot 221 and being the point Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 221 South 35 degrees 41 minutes 20 seconds West a distance of 20.09 to a damaged 1/2" iron pin found at the platted East corner said Lot 221:

thence continuing with the Southeast line of said Lot South 34 degrees 14 minutes 20 seconds West a distance 200.00 feet to a 5/8" iron pin set at the platted South corner of said Lot 221;

thence with the Southwest line of said Lot 221 North degrees 43 minutes 20 seconds West a distance of 115.16 feet a 5/8" iron pin set at the platted West corner of said Lot 221;

thence with the Northwest line of said Lot 221 degrees 14 minutes 20 seconds East a distance of 220.16 feet 221 a 5/8" iron pin set at the North corner of said Lot and passing a 5/8" iron pin set at the platted North corner of Lot 221 at a distance of 200.00 feet;

thence with the Northeast line of said Lot 221 and center of a 40 foot wide private easement South 35 degrees 46 minutes 20 seconds East a distance of 115.66 feet to the point of beginning containing .547 acres more or less, subject to any private easements of record.

The above .547 acre survey is intended to describe all Lot 221 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described pro Surv property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 6, 1991.

Approved • Mathematically Hocking County Engineer's office By K + Date 12-17-91


Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 47138 385-4260

Tany 1. Venter

LAUREL //

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 219 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

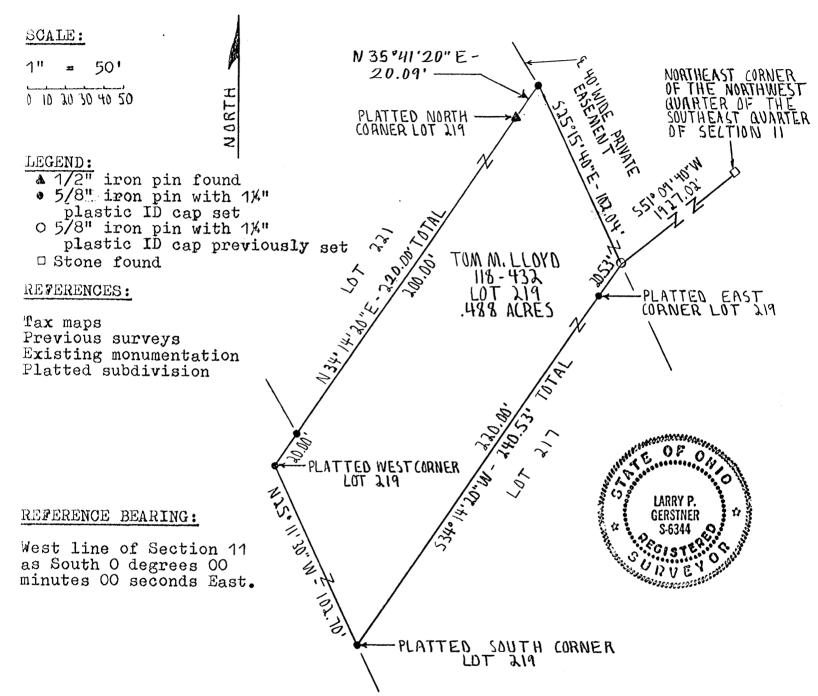

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 17th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By Marx Date 12-19-9/

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .488 ACRE LOT 219 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; all of Lot 219 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter Section 11; thence South 51 degrees 09 minutes 40 seconds West a distance of 1927.02 feet to a 5/8" iron pin previously set the East corner of said Lot 219 and being the point Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 219 South 34 degrees 14 minutes 20 seconds West a distance of 240.53 feet to a 5/8" iron pin set at the platted South corner of said Lot and passing a 5/8" iron pin set at the platted East corner said Lot 219 at a distance of 20.53 feet;

thence with the Southwest line of said Lot 219 North degrees 11 minutes 30 seconds West a distance of 102.70 feet a 5/8" iron pin set at the platted West corner of said Lot 219;

thence with the Northwest line of said Lot 219 North 34 degrees 14 minutes 20 seconds East a distance of 220.00 feet a damaged 1/2" iron pin found at the platted North corner said Lot 219 and passing a 5/8" iron pin set at a distance 20.00 feet;

thence continuing with the Northwest line of said Lot North 35 degrees 41 minutes 20 seconds East a distance of 20.09 feet to a 5/8" iron pin set at the North corner of said Lot 219:

thence with the Northeast line of said Lot 219 and center of a 40 foot wide private easement South 25 degrees 15 minutes 40 seconds East a distance of 102.04 feet to the point of beginning containing .488 acres more or less, subject to any private easements of record.

The above .488 acre survey is intended to describe all Lot 219 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey or previously set are capped by a 1-1/4" plastic identification cap. above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 17, 1991.

Approved - Mathematically

By # Date 12-19 Survey by:


Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4

Lang P. Venter

abo Ohic

Hocking County Engineer's office

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 220 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

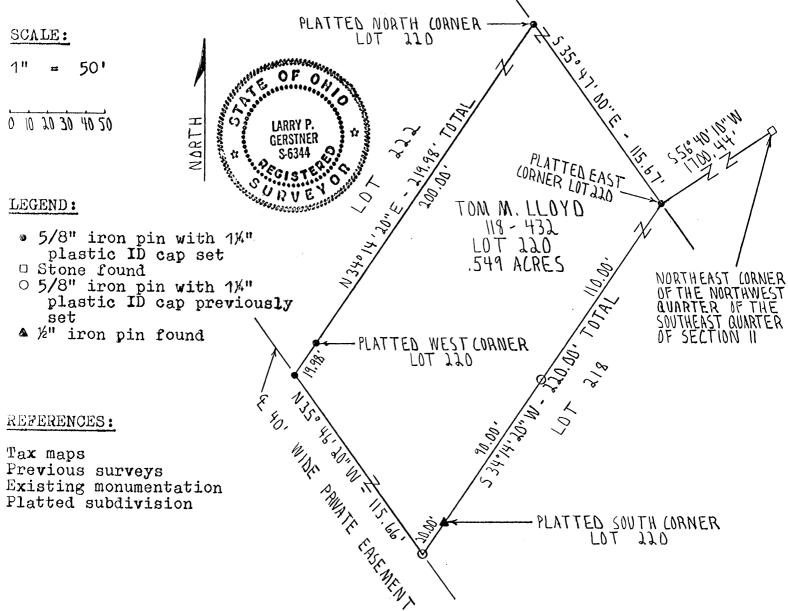

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 12th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By MALL Date 12-13-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .549 ACRE LOT 220 OF

SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 220 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter Section 11; thence South 56 degrees 40 minutes 10 seconds West a distance of 1700.44 feet to a 5/8" iron pin set at the platted East corner of said Lot 220 and being the point Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 220 South degrees 14 minutes 20 seconds West a distance of 220.00 feet a 5/8" iron pin previously set at the South corner of said Lot 220, passing a 5/8" iron pin previously set at a distance of 110.00 feet and a 1/2" iron pin found at the platted South corner of said Lot 220 at a distance of 200.00 feet;

thence with the Southwest line of said Lot 220 and center of a 40 foot wide private easement North 35 degrees 46 minutes 20 seconds West a distance of 115.66 feet to a 5/8" iron pin set at the West corner of said Lot 220;

thence with the Northwest line of said Lot 220 North degrees 14 minutes 20 seconds East a distance of 219.98 feet a 5/8" iron pin set at the platted North corner of said Lot 220 and passing a 5/8" iron pin set at the platted West said Lot 220 at a distance of 19.98 feet;

thence with the Northeast line of said Lot 220 South degrees 47 minutes 00 seconds East a distance of 115.67 feet the point of beginning containing .549 acres more or subject to any private easements of record.

The above .549 acre survey is intended to describe all Lot 220 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by 1-1/4" plastic identification cap. The above property was surveyed by Larry P. Gerstner, Ohio Registered ART CO OF THE STATE OF THE STAT Surveyor No. 6344, on December 12, 1991.


Approved • Mathematically Hocking County Engineer's office MAW Date 12-13-91

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138

Kany P. Ventrer

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 217 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

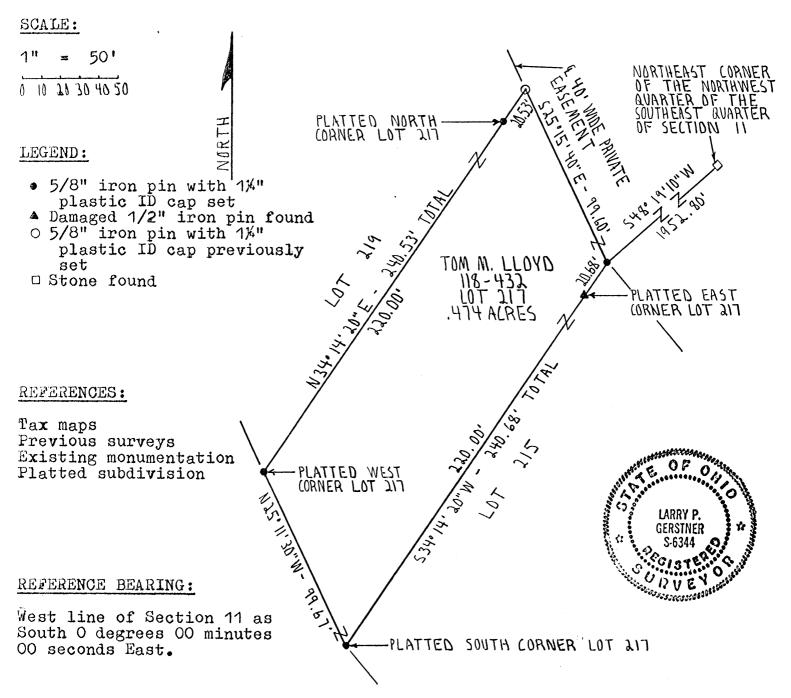

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 17th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By May Date 12-19-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .474 ACRE LOT 217 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 217 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 48 degrees 19 minutes 10 seconds West a distance of 1952.80 feet to a 5/8" iron pin set at the East corner of said Lot 217 and being the point of Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 217 South 34 degrees 14 minutes 20 seconds West a distance of 240.68 feet to a 5/8" iron pin set at the platted South corner of said Lot 217 and passing a damaged 1/2" iron pin found at the platted East corner of said Lot 217 at a distance of 20.68 feet;

thence with the Southwest line of said Lot 217 North 25 degrees 11 minutes 30 seconds West a distance of 99.67 feet to a 5/8" iron pin set at the platted West corner of said Lot 217;

thence with the Northwest line of said Lot 217 North 34 degrees 14 minutes 20 seconds East a distance of 240.53 feet to a 5/8" iron pin previously set at the North corner of said Lot 217 and passing a 5/8" iron pin set at the platted North corner of said Lot 217 at a distance of 220.00 feet;

thence with the Northeast line of said Lot 217 and the center of a 40 foot wide private easement South 25 degrees 15 minutes 40 seconds East a distance of 99.60 feet to the point of beginning containing .474 acres more or less, subject to any private easements of record.


The above .474 acre survey is intended to describe all of Lot 217 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey or previously set are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 17, 1991.

Approved • Mathematically
Hocking County Engineer's office
By Mac Date 12-19-91

Survey by:

LAUREL 11 Summit HAVEN Lot 218

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 218 as extended to the center of a 40 foot private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

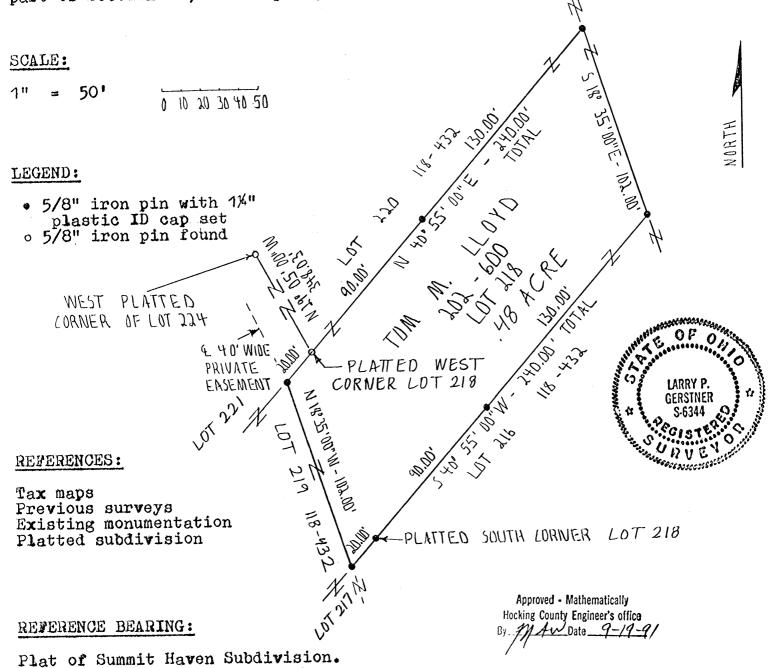

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 18th day of September, 1991 and that the plat is a correct representation of the premises as described by said survey.

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .48 ACRE LOT 218 OF

SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being foot private all of Lot 218 as extended to the center of a 40 easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

the platted West Beginning at a 5/8" iron pin found at corner of said Lot 218 from which a 5/8" iron pin found at platted West corner of Lot 224 of the same subdivision bears North 29 degrees 05 minutes 00 seconds West at a distance 348.03 feet:

thence with the Northwest line of said Lot 218 North 40 degrees 55 minutes 00 seconds East a distance of 220.00 feet to a 5/8" iron pin set at the North corner of said Lot passing a 5/8" iron pin set at a distance of 90.00 feet;

thence with the Northeast line of said Lot 218 South 1.8 degrees 35 minutes 00 seconds East a distance of 102.00 feet t.o

a 5/8" iron pin set at the East corner of said Lot 218;

thence with the Southeast line of said Lot 218 South 40 degrees 55 minutes 00 seconds West a distance of 240.00 feet a 5/8" iron pin set at the South corner of said Lot passing a 5/8" iron pin set at a distance of 130.00 and iron pin set at the platted South corner of said Lot distance of 220.00 feet;

thence with the Southwest line of said Lot 218 North 18 degrees 35 minutes 00 seconds West a distance of 102.00 feet a 5/8" iron pin set at the West corner of said Lot 218;

thence with the Northwest line of said Lot 218 North 40 degrees 55 minutes 00 seconds East a distance of 20.00 feet the point of beginning containing .48 acres more or subject to any private easements of record.

The above .48 acre survey is intended to describe all Lot 218 as extended by the recorded plat to the center of foot wide easement and as deeded to Tom M. Lloyd by deed reference Volume 202, Page 600, Hocking County Recorder's This survey was based upon information obtained from previous surveys, existing monumentation, and tax maps, The reference bearing for this survey platted subdivision. the plat of Summit Haven Subdivision. All iron pins set this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner. Ohio Registered Surveyor No. 6344, on September 18, 1991. William Constitution Constituti

Approved - Mathematically Hocking County Engineer's office By MAW Date 9-19-9

()

WINDSHAMENSHAME

Tany Weisher

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 216 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.



REFERENCE BEARING:

West line of Section 11 as South O degrees O minutes OO seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 12th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved - Mathematically
Hocking County Engineer's office
By FN Date 12-17-9

Registered Surveyor No. 6344

PLATTED SOUTH CORNER

SURVEY DESCRIPTION OF .473 ACRE LOT 216 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 216 as extended to the center of a 40 foot private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 50 degrees 15 minutes 50 seconds West a distance of 1721.01 feet to a 5/8" iron pin set at the platted East corner of said Lot 216 and being the point

Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 216 South degrees 14 minutes 20 seconds West a distance of 240.00 feet a 5/8" iron pin set at the South corner of said Lot 216 and passing a 5/8" iron pin set at the platted South corner of said Lot 216 at a distance of 220.00 feet;

thence with the Southwest line of said Lot 216 and center of a 40 foot wide private easement North 25 degrees 15 minutes 40 seconds West a distance of 99.53 feet to a 5/8" iron

pin previously set at the West corner of said Lot 216;

thence with the Northwest line of said Lot 216 degrees 14 minutes 20 seconds East a distance of 240.00 feet a 5/8" iron pin previously set at the platted North corner said Lot 216 and passing a 5/8" iron pin previously set at the platted West corner of said Lot 216 at a distance of 20.00 feet and a 5/8" iron pin previously set at a distance of 110.00 feet;

thence with the Northeast line of said Lot 216 South degrees 15 minutes 40 seconds East a distance of 99.53 feet the point of beginning containing .473 acres more

subject to any private easements of record.

The above .473 acre survey is intended to describe all Lot 216 as extended by the recorded plat to the center of a foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's This survey was based upon information obtained from Office. previous surveys, existing monumentation, tax maps, platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes seconds East. All iron pins set by this survey are capped by 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 12, 1991. THE OF ONE

Approved - Mathematically Hocking County Engineer's office By R-PM Date 12-17-91


Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138

Hany P. Ventra

PLAT OF .541 ACRE LOT 215 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 215 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

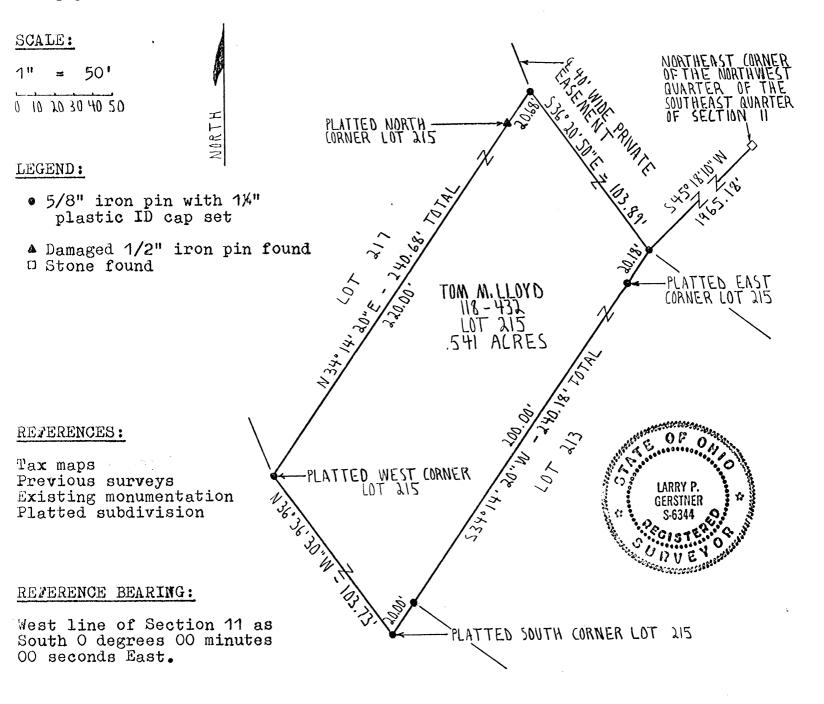

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 17th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By MacDate 12-19-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .541 ACRE LOT 215 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; all of Lot 215 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter Section 11; thence South 45 degrees 18 minutes 10 seconds West a distance of 1965.18 feet to a 5/8" iron pin set at the corner of said Lot 215 and being the point of Beginning of tract of land to be described;

thence with the Southeast line of said Lot 215 South degrees 14 minutes 20 seconds West a distance of 240.18 feet a 5/8" iron pin set at the platted South corner of said Lot 215, passing a 5/8" iron pin set at the platted East corner said Lot 215 at a distance of 20.18 feet and passing a 5/8" iron pin set at a distance of 220.18 feet;

thence with the Southwest line of said Lot 215 North degrees 36 minutes 30 seconds West a distance of 103.73 feet a 5/8" iron pin set at the platted West corner of said Lot 215;

thence with the Northwest line of said Lot 215 North degrees 14 minutes 20 seconds East a distance of 240.68 feet a 5/8" iron pin set at the North corner of said Lot 215 and passing a damaged 1/2" iron pin found at the platted North corner of said Lot 215 at a distance of 220.00 feet;

thence with the Northeast line of said Lot 215 and center of a 40 foot wide private easement South 36 degrees minutes 50 seconds East a distance of 103.89 feet to the point of beginning containing .541 acres more or less, subject to any private easements of record.

The above .541 acre survey is intended to describe all Lot 215 as extended by the recorded plat to the center of a foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above property was surveyed by Larry P. Gerstner, Ohio Registered Sur OF COMMENTS Surveyor No. 6344, on December 17, 1991.

Approved • Mathematically Hocking County Engineer's office By Ap Aw Date 12-19-9


Survey by:

Haury P. Lewbe

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138

PLAT OF .540 ACRE LOT 214 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 214 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

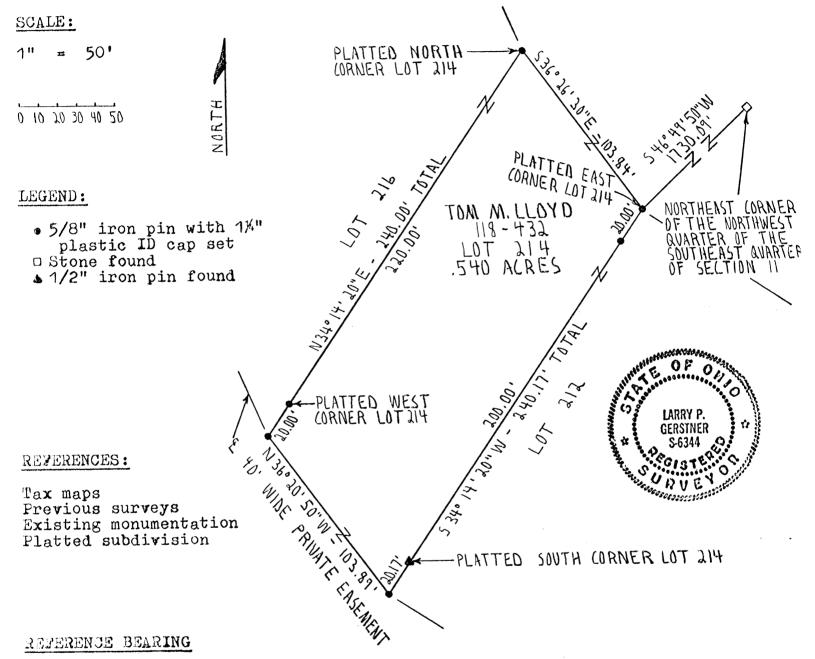

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 12th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By FN Date 12-17-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .540 ACRE LOT 214 OF

SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio: all of Lot 214 as extended to the center of a 40 foot private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 46 degrees 49 minutes 50 seconds West a distance of 1730.09 feet to a 5/8" iron pin set at platted East corner of said Lot 214 and being the Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 214 South degrees 14 minutes 20 seconds West a distance of 240.17 feet a 5/8" iron pin set at the South corner of said Lot 214, passing a 5/8" iron pin set at a distance of 20.00 feet and a 1/2" iron pin found at the platted South corner of said Lot at a distance of 220.00 feet;

thence with the Southwest line of said Lot 214 and center of a 40 foot wide private easement North 36 degrees minutes 50 seconds West a distance of 103.89 feet iron pin set at the West corner of said Lot 214;

thence with the Northwest line of said Lot 34 214 North degrees 14 minutes 20 seconds East a distance of 240.00 feet a 5/8" iron pin set at the platted North corner of said Lot 214 and passing a 5/8" iron pin set at the platted West said Lot 214 at a distance of 20.00 feet;

thence with the Northeast line of said Lot 214 South 36 degrees 26 minutes 30 seconds East a distance of 103.84 feet to the point of beginning containing .540 acres more or subject to any private easements of record.

The above .540 acre survey is intended to describe all Lot 214 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's This survey was based upon information obtained Office. from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes seconds East. All iron pins set by this survey are capped by 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Sur Sur Of Control of the Control of Surveyor No. 6344, on December 12, 1991.


Approved - Mathematically Hocking County Engineer's office By K-FN Date 12-17-1/

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138

Lany Paston

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 213 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township, Range 18.

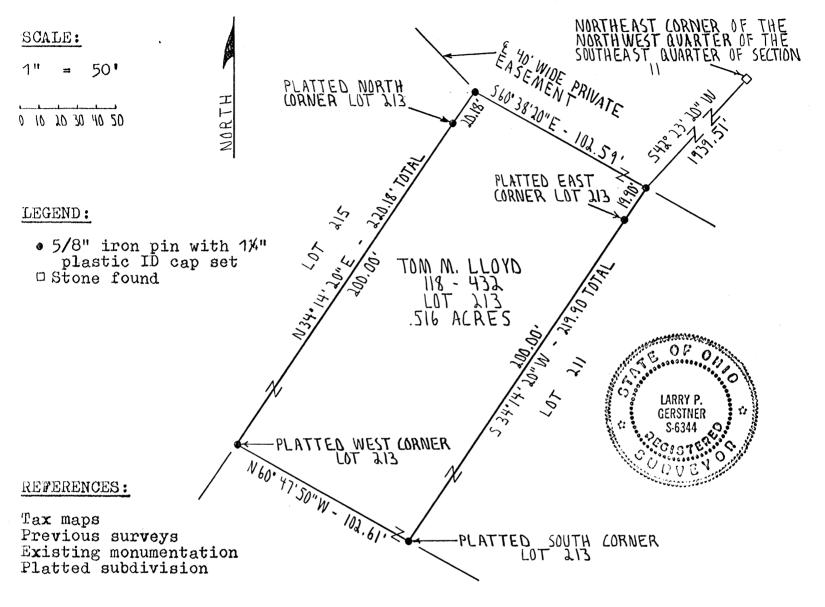

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 17th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By May Date 12-19-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .516 ACRE LOT 213 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 213 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 42 degrees 23 minutes 20 seconds West a distance of 1939.51 feet to a 5/8" iron pin set at the East corner of said Lot 213 and being the point of Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 213 South 34 degrees 14 minutes 20 seconds West a distance of 219.90 feet to a 5/8" iron pin set at the platted South corner of said Lot 213 and passing a 5/8" iron pin set at the platted East corner of said Lot 213 at a distance of 19.90 feet:

thence with the Southwest line of said Lot 213 North 60 degrees 47 minutes 50 seconds West a distance of 102.61 feet to a 5/8" iron pin set at the platted West corner of said Lot 213;

thence with the Northwest line of said Lot 213 North 34 degrees 14 minutes 20 seconds East a distance of 220.18 feet to a 5/8" iron pin set at the North corner of said Lot 213 and passing a 5/8" iron pin set at the platted North corner of said Lot 213 at a distance of 200.00 feet;

thence with the Northeast line of said Lot 213 and the center of a 40 foot wide private easement South 60 degrees 38 minutes 20 seconds East a distance of 102.59 feet to the point of beginning containing .516 acres more or less, subject to any private easements of record.

The above .516 acre survey is intended to describe all of Lot 213 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 17, 1991.

Approved • Mathematically
Hocking County Engineer's office
By Mary Date 12-11-94

OF OF


GERSTNER

La Consesson Control Control

() 3

Survey by:

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 212 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

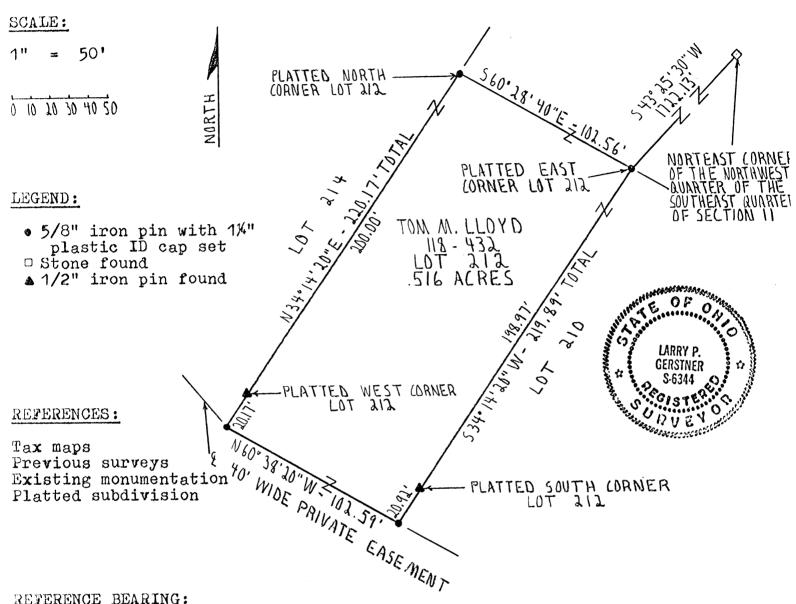

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 12th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved - Mathematically Hocking County Engineer's office By R-FN Date 12/79/

Survey by:

SURVEY DESCRIPTION OF .516 ACRE LOT 212 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 212 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 43 degrees 25 minutes 30 seconds West a distance of 1722.13 feet to a 5/8" iron pin set at the platted East corner of said Lot 212 and being the point of Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 212 South 34 degrees 14 minutes 20 seconds West a distance of 219.89 feet to a 5/8" iron pin set at the South corner of said Lot 212 and passing a 1/2" iron pin found at the platted South corner of said Lot 212 at a distance of 198.97 feet;

thence with the Southwest line of said Lot 212 and the center of a 40 foot wide private easement North 60 degrees 38 minutes 20 seconds West a distance of 102.59 feet to a 5/8" iron pin set at the West corner of said Lot 212;

thence with the Northwest line of said Lot 212 North 34 degrees 14 minutes 20 seconds East a distance of 220.17 feet to a 5/8" iron pin set at the platted North corner of said Lot 212 and passing a 1/2" iron pin found at the platted West corner of said Lot 212 at a distance of 20.17 feet;

thence with the Northeast line of said Lot 212 South 60 degrees 28 minutes 40 seconds East a distance of 102.56 feet to the point of beginning containing .516 acres more or less, subject to any private easements of record.

The above .516 acre survey is intended to describe all of Lot 212 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 12, 1991.


Approved • Mathematically
Hocking County Engineer's office
By FA Date 12-19-9

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

Lany P. Verster

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 211 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

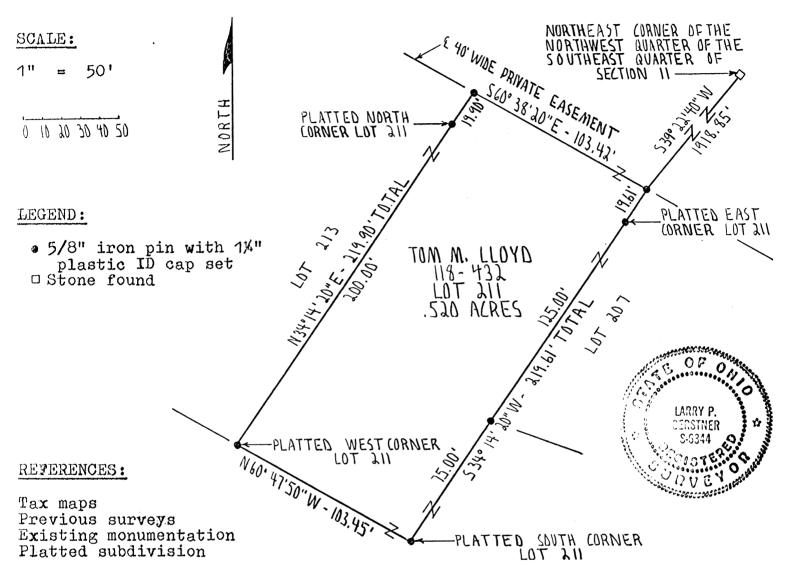

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 17th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By 12-19-91 Date R-FXI

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .520 ACRE LOT 211 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 211 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11. Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 39 degrees 22 minutes 40 seconds West a distance of 1918.85 feet to a 5/8" iron pin set at the East corner of said Lot 211 and being the point of Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 211 South 34 degrees 14 minutes 20 seconds West a distance of 219.61 feet to a 5/8" iron pin set at the platted South corner of said Lot 211, passing a 5/8" iron pin set at the platted East corner of said Lot 211 at a distance of 19.61 feet and passing a 5/8" iron pin set at a distance of 144.61 feet;

thence with the Southwest line of said Lot 211 North 60 degrees 47 minutes 50 seconds West a distance of 103.45 feet to a 5/8" iron pin set at the platted West corner of said Lot 211;

thence with the Northwest line of said Lot 211 North 34 degrees 14 minutes 20 seconds East a distance of 219.90 feet to a 5/8" iron pin set at the North corner of said Lot 211 and passing a 5/8" iron pin set at the platted North corner of said Lot 211 at a distance of 200.00 feet;


thence with the Northeast line of said Lot 211 and the center of a 40 foot wide private easement South 60 degrees 38 minutes 20 seconds East a distance of 103.42 feet to the point of beginning containing .520 acres more or less, subject to any private easements of record.

The above .520 acre survey is intended to describe all of Lot 211 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 17, 1991.

Approved • Mathematically
Hocking County Engineer's office —
By Lagran Date 121940

Survey by:

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 210 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

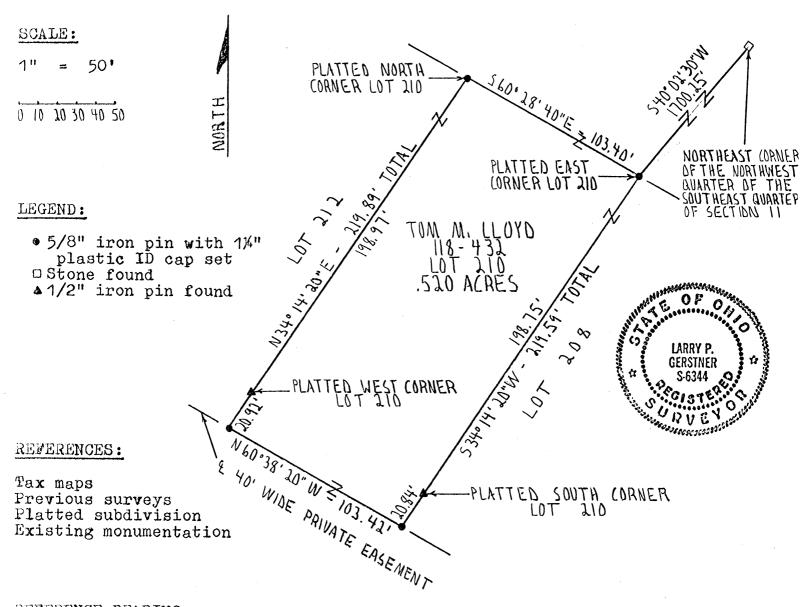

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 12th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By MACOate 12-18-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .520 ACRE LOT 210 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 210 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 40 degrees 02 minutes 30 seconds West a distance of 1700.25 feet to a 5/8" iron pin set at the platted East corner of said Lot 210 and being the point of Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 210 South 34 degrees 14 minutes 20 seconds West a distance of 219.59 feet to a 5/8" iron pin set at the South corner of said Lot 210 and passing a 1/2" iron pin found at the platted South corner of said Lot 210 at a distance of 198.75 feet;

thence with the Southwest line of said Lot 210 and the center of a 40 foot wide private easement North 60 degrees 38 minutes 20 seconds West a distance of 103.42 feet to a 5/8" iron pin set at the West corner of said Lot 210;

thence with the Northwest line of said Lot 210 North 34 degrees 14 minutes 20 seconds East a distance of 219.89 feet to a 5/8" iron pin set at the platted North corner of said Lot 210 and passing a 1/2" iron pin found at the platted West corner of said Lot 210 at a distance of 20.92 feet;

thence with the Northeast line of said Lot 210 South 60 degrees 28 minutes 40 seconds East a distance of 103.40 feet to the point of beginning containing .520 acres more or less, subject to any private easements of record.

The above .520 acre survey is intended to describe all of Lot 210 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 12, 1991.

Approved • Mathematically
Hocking County Engineer's office
By MALLDate 12-18-91

A Commence of the Commence of


0

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

Jany V. Verstrer

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 208 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

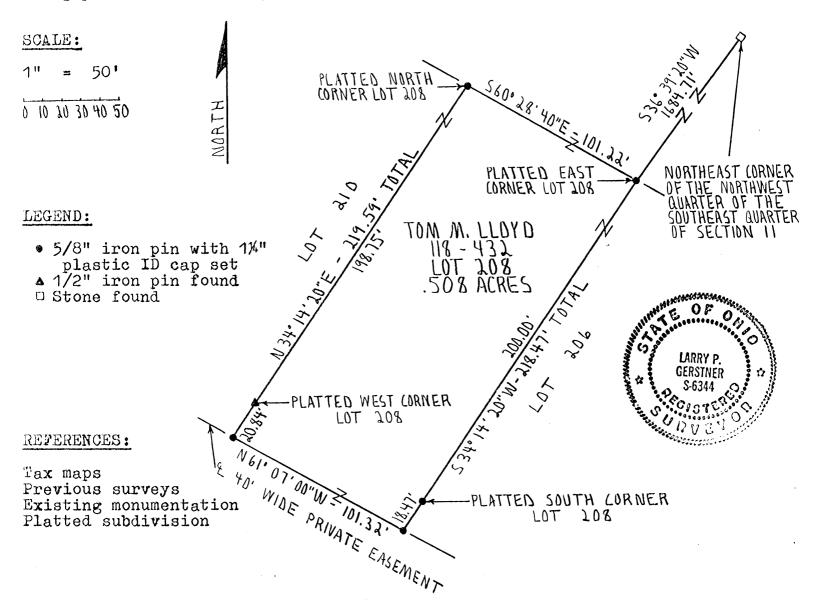

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 12th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved - Mathematically
Hocking County Engineer's office
By PFN Date P-17-9/

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .508 ACRE LOT 208 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 208 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 36 degrees 39 minutes 20 seconds West a distance of 1684.71 feet to a 5/8" iron pin set at the platted East corner of said Lot 208 and being the point of Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 208 South 34 degrees 14 minutes 20 seconds West a distance of 218.47 feet to a 5/8" iron pin set at the South corner of said Lot 208 and passing a 5/8" iron pin set at the platted South corner of said Lot 208 at a distance of 200.00 feet:

thence with the Southwest line of said Lot 208 and the center of a 40 foot wide private easement North 61 degrees 07 minutes 00 seconds West a distance of 101.32 feet to a 5/8" iron pin set at the West corner of said Lot 208;

thence with the Northwest line of said Lot 208 North 34 degrees 14 minutes 20 seconds East a distance of 219.59 feet to a 5/8" iron pin set at the platted North corner of said Lot 208 and passing a 1/2" iron pin found at the platted West corner of said Lot 208 at a distance of 20.84 feet;

thence with the Northeast line of said Lot 208 South 60 degrees 28 minutes 40 seconds East a distance of 101.22 feet to the point of beginning containing .508 acres more or less, subject to any private easements of record.

The above .508 acre survey is intended to describe all of Lot 208 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 12, 1991.

Approved • Mathematically
Hocking County Engineer's office
By FN Date VITT


Military Constant of the Const

Survey by:

Laury P. Ventrer

PLAT OF .616 ACRE LOT 207 OF LAUREL !! SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD LOT 207

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 207 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

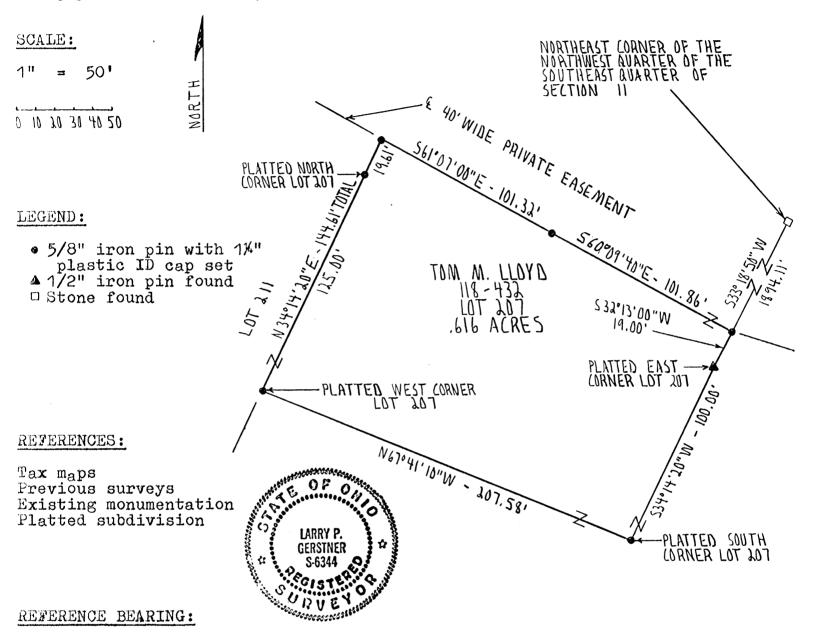

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 12th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved - Mathematically
Hocking County Engineer's office
By Date 1 Z - 19-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .616 ACRE LOT 207 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, all of Lot 207 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 33 degrees 18 minutes 50 seconds West a distance of 1894.11 feet to a 5/8" iron pin set at the East corner of said Lot 207 and being the point of Beginning tract of land to be described:

thence with the Southeast line of said Lot 207 South degrees 13 minutes 00 seconds West a distance of 19.00 feet to a 1/2" iron pin found at the platted East corner of 207;

thence contnuing with the Southeast line of said Lot South 34 degrees 14 minutes 20 seconds West a distance 100.00 feet to a 5/8" iron pin set at the platted South corner of said Lot 207;

thence with the Southwest line of said Lot 207 North degrees 41 minutes 10 seconds West a distance of 207.58 feet a 5/8" iron pin set at the platted West corner of said Lot 207;

thence with the Northwest line of said Lot 207 North degrees 14 minutes 20 seconds East a distance of 144.61 feet a 5/8" iron pin set at the North corner of said Lot 207 passing a 5/8" iron pin set at the platted North corner of Lot 207 at a distance of 125.00 feet;

thence with the Northeast line of said Lot center of a 40 foot wide private easement the following bearings and distances:

- 1) South 61 degrees 07 minutes 00 seconds East a distance of 101.32 feet to a 5/8" iron pin set;
- 2) South 61 degrees 09 minutes 40 seconds East distance of 101.86 feet to the point of beginning containing .616 more or less, subject to any private easements of record.

The above .616 acre survey is intended to describe all Lot 207 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes seconds East. All iron pins set by this survey are capped by 1-1/4" plastic identification cap. 1-1/4" plastic identification cap. The property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 12, 1991.

Mathematically The above described

Hocking County Engineer's office By MAW Date 12-19-91


Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

Jany P. Weister

PLAT OF .507 ACRE LOT 206 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 206 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

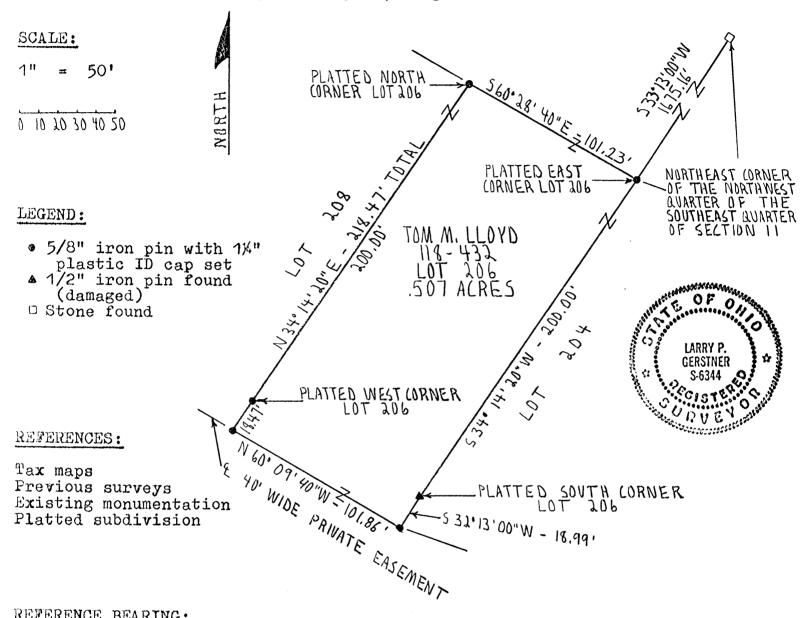

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 12th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved - Mathematically Hocking County Engineer's office By R-FN Date 12-17-91

Registered/Surveyor No.

Survey by:

SURVEY DESCRIPTION OF .507 ACRE LOT 206 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 206 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 33 degrees 13 minutes 00 seconds West a distance of 1675.16 feet to a 5/8" iron pin set at the platted East corner of said Lot 206 and being the point of Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 206 South 34 degrees 14 minutes 20 seconds West a distance of 200.00 feet to a damaged 1/2" iron pin found at the platted South corner of said Lot 206;

thence continuing with the Southeast line of said Lot 206 South 32 degrees 13 minutes 00 seconds West a distance of 18.99 feet to a 5/8" iron pin set at the South corner of said Lot 206;

thence with the Southwest line of said Lot 206 and the center of a 40 foot wide private easement North 60 degrees 09 minutes 40 seconds West a distance of 101.86 feet to a 5/8" iron pin set at the West corner of said Lot 206;

thence with the Northwest line of said Lot 206 North 34 degrees 14 minutes 20 seconds East a distance of 218.47 feet to a 5/8" iron pin set at the platted North corner of said Lot 206 and passing a 5/8" iron pin set at the platted West corner of said Lot 206 at a distance of 18.47 feet;

thence with the Northeast line of said Lot 206 South 60 degrees 28 minutes 40 seconds East a distance of 101.23 feet to the point of beginning containing .507 acres more or less, subject to any private easements of record.

The above .507 acre survey is intended to describe all of Lot 206 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 12, 1991.

Approved • Mathematically
Hocking County Engineer's office
By Company Date 12-1-91


Survey by:

Jany P. Verston

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

LARRY P.
GERSINER
S-6344

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 204 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

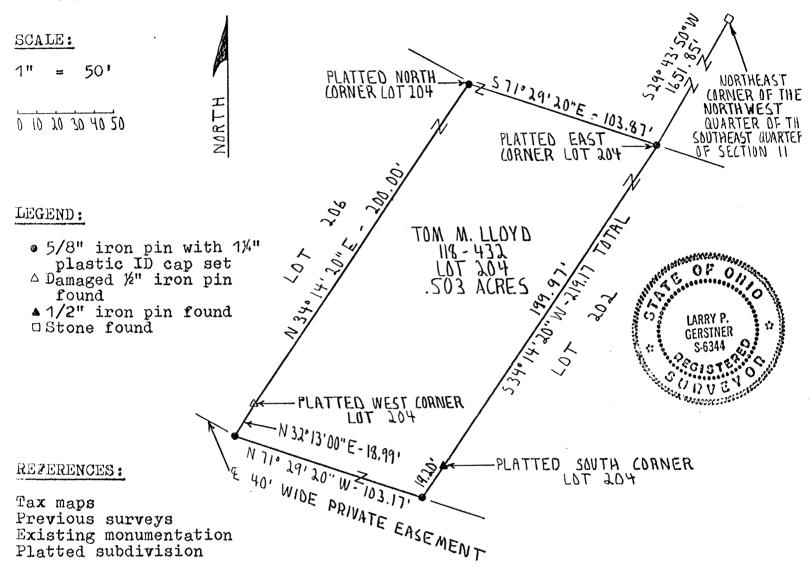

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 12th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By 14 4 Date 12-19-41

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .503 ACRE LOT 204 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 204 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 29 degrees 43 minutes 50 seconds West a distance of 1651.85 feet to a 5/8" iron pin set at the platted East corner of said Lot 204 and being the point of Beginning of the tract of land to be described;

thence with the Southeast line of said Lot 204 South 34 degrees 14 minutes 20 seconds West a distance of 219.17 feet to a 5/8" iron pin set at the South corner of said Lot 204 and passing a 1/2" iron pin found at the platted South corner of said Lot 204 at a distance of 199.97 feet;

thence with the Southwest line of said Lot 204 and the center of a 40 foot wide private easement North 71 degrees 29 minutes 20 seconds West a distance of 103.17 feet to a 5/8" iron pin set at the West corner of said Lot 204;

thence with the Northwest line of said Lot 204 North 32 degrees 13 minutes 00 seconds East a distance of 18.99 feet to a damaged 1/2" iron pin found at the platted West corner of said Lot 204;

thence continuing with the Northwest line of said Lot 204 North 34 degrees 14 minutes 20 seconds East a distance of 200.00 feet to a 5/8" iron pin set at the platted North corner of said Lot 204;

thence with the Northeast line of said Lot 204 South 71 degrees 29 minutes 20 seconds East a distance of 103.87 feet to the point of beginning containing .503 acres more or less, subject to any private easements of record.

The above .503 acre survey is intended to describe all of Lot 204 as extended by the recorded plat to the center of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 12, 1991.


Approved • Mathematically
Hocking County Engineer's office
By May Date 12 19 4

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

Jamy P. Verster

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 202 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

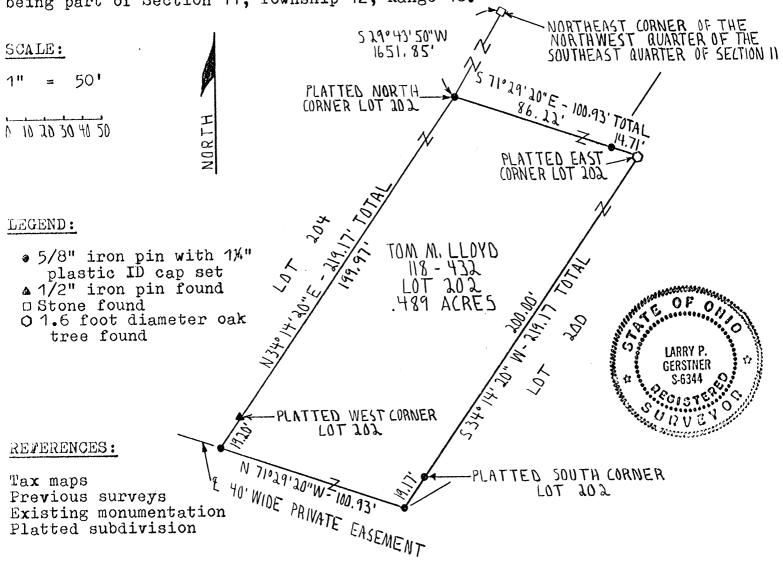

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 12th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By A Date 12-18-91

Registered Surveyor No. 6344

Survey by:

SURVEY DESCRIPTION OF .489 ACRE LOT 202 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; all of Lot 202 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter Section 11; thence South 29 degrees 43 minutes 50 seconds West a distance of 1651.85 feet to a 5/8" iron pin set at platted North corner of said Lot 202 and being the point Beginning of the tract of land to be described;

thence with the Northeast line of said Lot 202 degrees 29 minutes 20 seconds East a distance of 100.93 feet a 1.6 foot diameter oak tree found at the platted East of said Lot 202 and passing a 5/8" iron pin set at a distance of 86.22 feet:

thence with the Southeast line of said Lot 202 South degrees 14 minutes 20 seconds West a distance of 219.17 feet a 5/8" iron pin set at the South corner of said Lot 202 and passing a 5/8" iron pin set at the platted South corner of Lot 202 at a distance of 200.00 feet;

thence with the Southwest line of said Lot 202 and center of a 40 foot wide private easement North 71 degrees minutes 20 seconds West a distance of 100.93 feet to a 5/8" iron pin set at the West corner of said Lot 202;


thence with the Northwest line of said Lot 202 North degrees 14 minutes 20 seconds East a distance of 219.17 feet the point of beginning, passing a 1/2" iron pin found at a distance of 19.20 feet and containing .489 acres more or subject to any private easements of record.

The above .489 acre survey is intended to describe all Lot 202 as extended by the recorded plat to the center of a foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, platted subdivision. The reference bearing for this survey the West line of Section 11 as South 0 degrees 00 minutes seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. above The property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 12, 1991. C) 20 de la constant de la constant

Approved - Mathematically Hocking County Engineer's office By 11 Au/Date 12-18

Survey by:

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 200 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

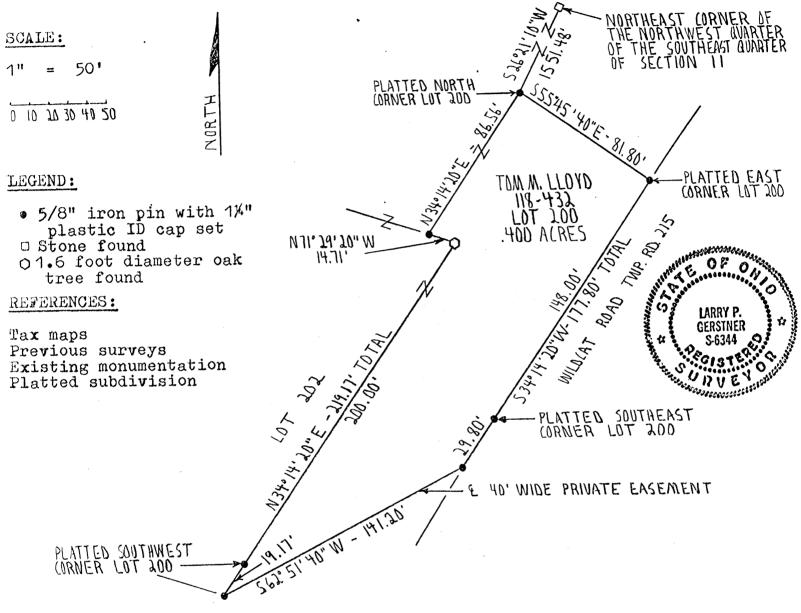

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 11th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved • Mathematically
Hocking County Engineer's office
By M Au Date 12-19-91

Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main St., Logan, Ohio 43138 385-4260

SURVEY DESCRIPTION OF .400 ACRE LOT 200 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; all of Lot 200 as extended to the center of a 40 foot wide private easement of Summit Haven Subdivision as recorded Plat Book E, Page 10, Hocking County Recorder's Office; part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter Section 11; thence South 26 degrees 21 minutes 10 seconds West a distance of 1551.48 feet to a 5/8" iron pin set at platted North corner of said Lot 200 and being the point Beginning of the tract of land to be described;

thence with the Northeast line of said Lot 200 South degrees 45 minutes 40 seconds East a distance of 81.80 feet a 5/8" iron pin set at the platted East corner of said Lot 200;

thence with the Southeast line of said Lot 200 and edge of Township Road 215, Wildcat Road, South 34 degrees 14 minutes 20 seconds West a distance of 177.80 feet to a 5/8" iron pin set at the Southeast corner of said Lot 200 passing a 5/8" iron pin set at the platted Southeast corner said Lot 200 at a distance of 148.00 feet;

thence with the South line of said Lot 200 and the center of a 40 foot wide private easement South 62 degrees 51 minutes 40 seconds West a distance of 141.20 feet to a 5/8" iron set at the Southwest corner of said Lot 200;

thence with a Northwest line of said Lot 200 North degrees 14 minutes 20 seconds East a distance of 219.17 feet a 1.6 foot diameter oak tree found and passing a 5/8" iron pin set at the platted Southwest corner of said Lot distance of 19.17 feet;

thence North 71 degrees 29 minutes 20 seconds distance of 14.71 feet to a 5/8" iron pin set;

thence with a Northwest line of said Lot 200 North degrees 14 minutes 20 seconds East a distance of 86.56 feet the point of beginning and containing .400 acres more or subject to any private easements of record.

The above .400 acre survey is intended to describe all Lot 200 as extended by the recorded plat to the center of foot wide private easement and as deeded to Tom M. Lloyd deed reference Volume 118, Page 432, Hocking County Recorder's This survey was based upon information obtained from Office. previous surveys, existing monumentation, and maps, survey platted subdivision. The reference bearing for this the West line of Section 11 as South 0 degrees 00 minutes seconds East. All iron pins set by this survey are capped by 1-1/4" plastic identification cap. described The above property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 11, 1991.

Approved • Mathematically

Hocking County Engineer's office

Hocking County Engineer's office


Survey by:

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

PLAT OF .733 ACRE LOT 228 PLUS A PLATTING ERROR OF LAUREL 11 SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD Summit Haven 101228

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 228 plus a .254 acre platting error both as extended to the West edge of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

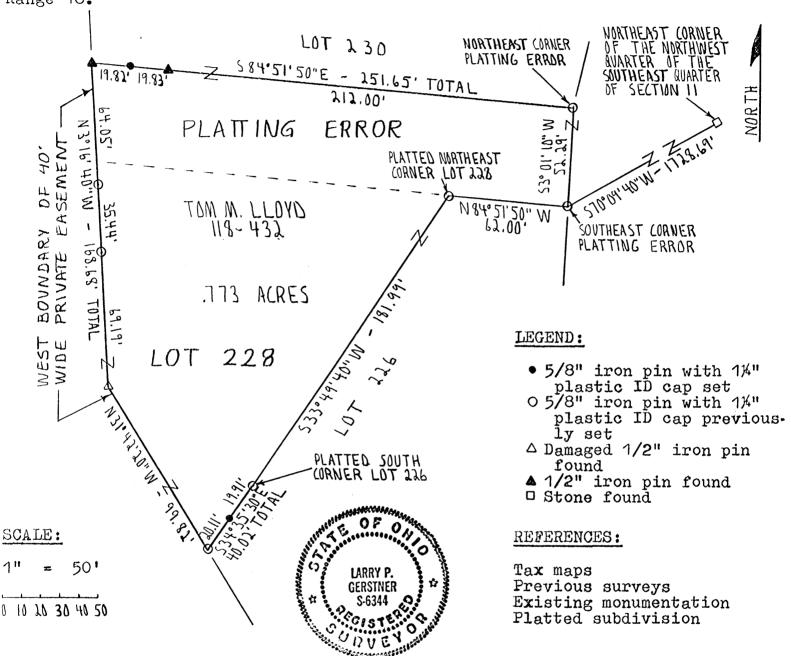

REFERENCE BEARING:

West line of Section 11 as South O degrees 00 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 17th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved - Mathematically
Hocking County Engineer's office
By Date 12-2-11

Registered Surveyor No. 6344

Survey by;

Larry P. Gerstner - Engineering and Surveying 119 West Main St., Logan, Ohio 43138 385-4260

SURVEY DESCRIPTION OF .773 ACRE LOT 228 PLUS A PLATTING ERROR OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 228 plus a .254 acre platting error both as extended to the West edge of a 40 foot wide private easement of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 70 degrees 09 minutes 40 seconds West a distance of 1728.69 feet to a 5/8" iron pin previously set at the Southeast corner of said platting error and being the point of Beginning of the tract of land to be described;

thence with the South line of said platting error North 84 degrees 51 minutes 50 seconds West a distance of 62.00 feet to a 5/8" iron pin

previously set at the platted Northeast corner of said Lot 228;

thence with the East line of said Lot 228 South 33 degrees 49 minutes 40 seconds West a distance of 181.99 feet to a 5/8" iron pin previously set at the platted South corner of said Lot 228;

thence continuing with the East line of said Lot 228 South 34 degrees 35 minutes 30 seconds East a distance of 40.02 feet to a 5/8" iron pin previously set at the South corner of said Lot 228 and passing a 5/8" iron pin set at a distance of 19.91 feet;

thence with the West line of said Lot 228 and the West boundary of a 40 foot wide private easement North 31 degrees 42 minutes 20 seconds West

a distance of 99.82 feet to a damaged 1/2" iron pin found;

thence continuing with the West line of said Lot 228 and said platting error and the West line of a 40 foot wide private easement North 3 degrees 16 minutes 40 seconds West a distance of 168.68 feet to a 1/2" iron pin found, and passing 5/8" iron pins previously set at distances of 69.19 feet and 104.63 feet;

thence with the North line of said platting error South 84 degrees 51 minutes 50 seconds East a distance of 251.65 feet to a 5/8" iron pin previously set at the platted Northeast corner of said platting error and passing a 5/8" iron pin set at a distance of 19.82 feet and a 1/2" iron pin found at a distance of 39.65 feet;

thence with the East line of said platting error South 3 degrees 01 minutes 10 seconds West a distance of 52.29 feet to the point of beginning containing .773 acres more or less, subject to any private easements of record.

The above .773 acre survey is intended to describe all of Lot 228 and a platting error as extended by the recorded plat to the West edge of a 40 foot wide private easement and as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 17.

Approved • Mathematically
Hocking County Engineer's office
By NEFN Date 12-26-7/


Survey by:

Larry P. Gerstner - Engineering and Surveying \$\frac{1}{3}\$ 119 West Main Street, Logan, Ohio 43138 385-4260

GERSTNER S-6344

LAUREL 11 ,254 Ac.

Situated in Laurel Township, Hocking County, Ohio; being a platting error lying between Lots 230, 228, and 226 of the Summit Haven Subdivision as recorded in Plat Book E. Page 10, Hocking County Recorder's Office; and being part of Section 11, Township 12, Range 18.

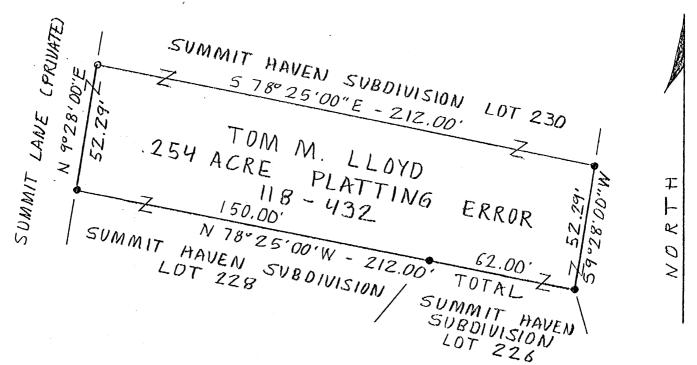

SCALE:

1'' = 40'

LEGEND:

o 5/8" iron pin found

• 5/8" iron pin with 1-1/4" plastic ID cap set

REFERENCES:

Tax maps
Previous surveys
Existing Monumentation
Platted subdivision

REFERENCE BEARING:

Approved - Mathematically **
Hocking County Engineer's office
By E CK Date 5-4-68

CONDITIONAL APPROVAL/TRANSFER-Not to be used as separate building site or transferred as an Independent parcel in the future without Planning Commission and/or health Dept. approval.



Platted North line of Lots 228 and 226 as South 78 degrees 25 minutes 00 seconds East.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 2nd day of May, 1988 and that the plat is a correct representation of the premises as described by said survey.

Registored Surveyor No. 6433

Survey by: Larry P. Gerstner - Engineering and Surveying 119 West Main St., Logan, Ohio 43138 385-4260

Situated in Laurel Township, Hocking County, Ohio; being a platting error lying between Lots 230, 228, and 226 of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Beginning at a 5/8" iron pin found at the Southwest corner of said Lot 230; thence South 78 degrees 25 minutes 00 seconds East a distance of 212.00 feet to a 5/8" iron pin set at the Southeast corner of said Lot 230; thence South 9 degrees 28 minutes 00 seconds West a distance of 52.29 feet to a 5/8" iron pin set at the Northeast corner of said Lot 226; thence North 78 degrees 25 minutes 00 seconds West a distance of 212.00 feet to a 5/8" iron pin set at the Northwest corner of said Lot 228 and passing a 5/8" iron pin set at a distance of 62.00 feet; thence North 9 degrees 28 minutes 00 seconds East a distance of 52.29 feet to the point of beginning containing .254 acres more or less, subject to any private easements of record.

The above .254 acre survey is intended to describe all of a platting error lying between Lots 230, 228, and 226 as deeded to the origonal subdivision platter Tom Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the platted North line of Lots 228 and 226 as South 78 degrees 25 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on May 2, 1988.



Survey by:

Lany P. Gerotes


Larry P. Gerstner - Engineering and Surveying 113 West Main Street, Logan, Ohio 43138 385-4260

Approved - Mathematically **
Hocking County Engineer's office
By CK Date 5-4-88

CONDITIONAL APPROVAL/TRANSFER-Not to be used as separate building site or transferred as an independent parcel in the future without Planning Commission and/or health Dept. approval.

PLAT OF A 3.000 ACRE TRACT FOR TERRY McCASLIN

Situated in Laurel Township, Hocking County, Ohio; being part of the Southwest quarter of the Southeast quarter of Section 11, Township 12, Range 18.

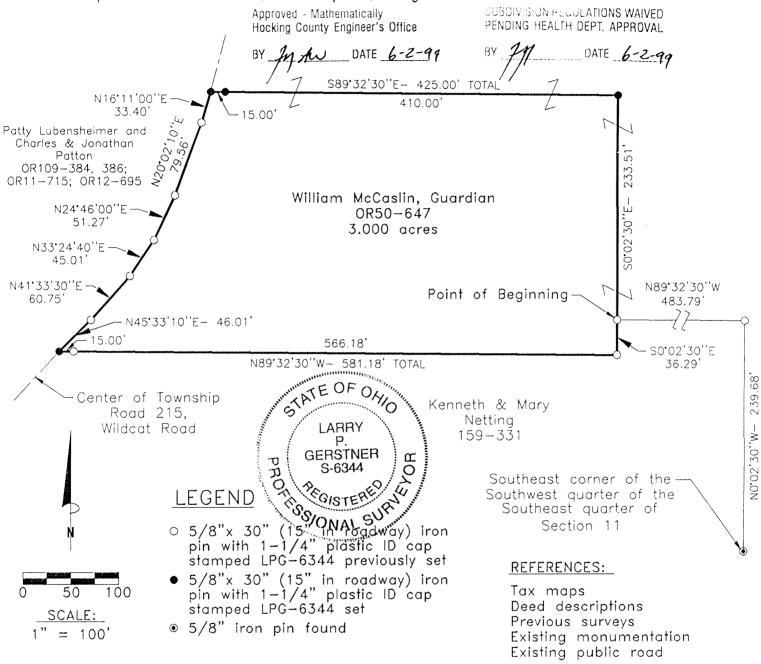

REFERENCE BEARING:

The West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 27th day of May, 1999 and that the plat is a correct representation of the premises as described by said survey.

Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner — Engineering and Surveying 9 East Second Street, Suite A, Logan, Ohio 43138 (740) 385—4260

SURVEY DESCRIPTION OF A 3.000 ACRE TRACT FOR TERRY McCASLIN

Situated in Laurel Township, Hocking County, Ohio; being part of the Southwest quarter of the Southeast quarter of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a 5/8" iron pin found at the Southeast corner of the Southwest quarter of the Southeast quarter of Section 11; thence North 0 degrees 02 minutes 30 seconds West a distance of 239.68 feet to a 5/8" iron pin previously set;

thence North 89 degrees 32 minutes 30 seconds West a distance of 483.79 feet to a 5/8" iron pin previously set and being the point of **Beginning** of the tract of land to be described;

thence South 0 degrees 02 minutes 30 seconds East a distance of 36.29 feet to a 5/8" iron pin previously set;

thence North 89 degrees 32 minutes 30 seconds West a distance of 581.18 to a 5/8" iron pin set in the center of Township Road 215, Wildcat Road, and passing a 5/8" iron pin previously set at a distance of 566.18 feet:

thence with the center of said Township Road 215 the following six bearings and distances:

- 1) North 45 degrees 33 minutes 10 seconds East a distance of 46.01 feet to a 5/8" iron pin previously set;
- 2) North 41 degrees 33 minutes 30 seconds East a distance of 60.75 feet to a 5/8" iron pin previously set:
- 3) North 33 degrees 24 minutes 40 seconds East a distance of 45.01 feet to a 5/8" iron pin previously set;
- 4) North 24 degrees 46 minutes 00 seconds East a distance of 51.27 feet to a 5/8" iron pin previously set;
- 5) North 20 degrees 02 minutes 10 seconds East a distance of 79.56 feet to a 5/8" iron pin previously set:
- 6) North 16 degrees 11 minutes 00 seconds East a distance of 33.40 feet to a 5/8" iron pin set; thence leaving the center of said Township Road 215 South 89 degrees 32 minutes 30 seconds East a distance of 425.00 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 15.00 feet;

thence South 0 degrees 02 minutes 30 seconds East a distance of 233.51 feet to the point of beginning, containing 3.000 acres more or less, and subject to the public easement of said Township Road 215 and any other public or private easements of record.

The above 3.000 acre survey is intended to describe part of the 24.37 acre surveyed tract as deeded to William McCaslin, Guardian, deed reference Volume OR50, Page 647, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey or previously set are 5/8" by 30" (15" in roadway) and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on May 27, 1999. TATE OF OHIO SUBDIVISION REGULATIONS WAIVED


Approved - Mathematically Hocking County Engineer's Office

PENDING HEALTH DEPT. APPROVAL

Larry P. Gerstner - Engineering and Surveying 9 East Second Street, Suite A, Logan, Ohio 43138

PLAT OF A 3.498 ACRE TRACT FOR TOM LLOYD LAUREL 1

Situated in Laurel Township, Hocking County, Ohio; being part of the North half of the South—west quarter of the Southeast quarter of Section 11, Township 12, Range 18.

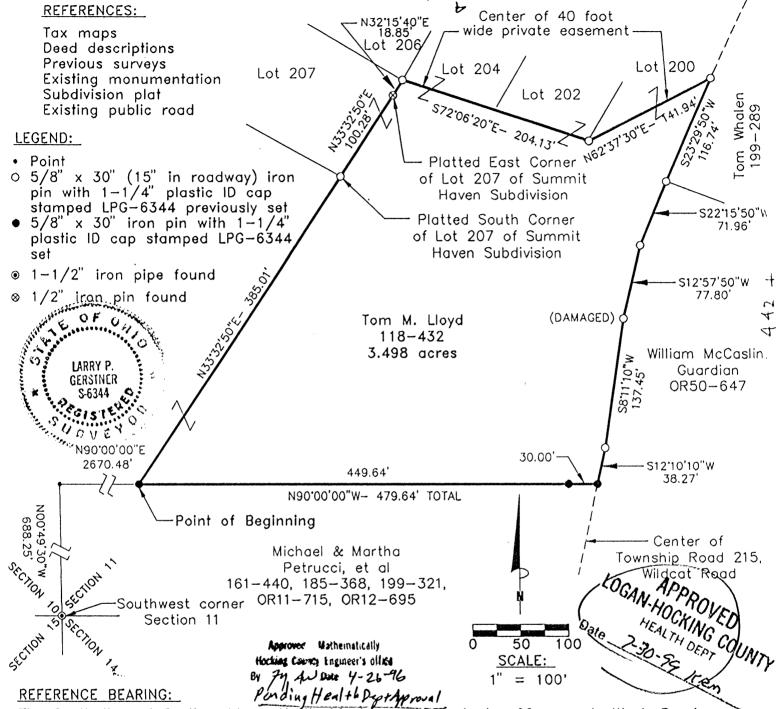

The South line of Section 11 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION: .

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 24th day of April, 1996 and that the plat is a correct representation of the premises as described by said survey.

Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner — Engineering and Surveying
119 West Main Street, Logan, Ohio 43138 (614) 385—4260

SURVEY DESCRIPTION OF A 3.498 ACRE TRACT FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being part of the North half of the Southwest quarter of the Southeast quarter of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference a 1-1/2" iron pipe found at the Southwest corner of Section 11; thence with the West line of Section 11 North 0 degrees 49 minutes 30 seconds West a distance of 688.25 feet to a point; thence leaving the West line of Section 11 North 90 degrees 00 minutes 00 seconds East a distance of 2670.48 feet to a 5/8" iron pin set and being the point of Beginning of the tract of land to be described:

thence North 33 degrees 32 minutes 50 seconds East a distance of 385.01 feet to a 5/8" iron pin previously set at the platted South corner of Lot 207 of Summit Haven Hollow Subdivision;

thence with the East line of said Lot 207 North 33 degrees 32 minutes 50 seconds East a distance of 100.28 feet to a 1/2" iron pin found at the platted East corner of Lot 207 of said Subdivision;

thence North 32 degrees 15 minutes 40 seconds East a distance of 18.85 feet to a 5/8" iron pin previously set in the center of a 40 foot wide private easement;

thence with the center of said private easement the following two bearings and distances;

- 1) South 72 degrees 06 minutes 20 seconds East a distance of 204.13 feet to a 5/8" iron pin previously set:
- 2) North 62 degrees 37 minutes 30 seconds East a distance of 141.94 feet to a 5/8" iron pin previously set in the center of Township Road 215, Wildcat Road;

thence leaving the center of said private easement and with the center of said Township Road 215 the following five bearings and distances:

- 1) South 23 degrees 29 minutes 50 seconds West a distance of 116.74 feet to a 5/8" iron pin previously set;
- 2) South 22 degrees 15 minutes 50 seconds West a distance of 71.96 feet to a 5/8" iron pin previously set:
- 3) South 12 degrees 57 minutes 50 seconds West a distance of 77.80 feet to a damaged 5/8" iron pin previously set;
- 4) South 8 degrees 11 minutes 10 seconds West a distance of 137. 45 feet to a 5/8" iron pin previously set;
- 5) South 12 degrees 10 minutes 10 seconds West a distance of 38.27 feet to a 5/8" iron pin set; thence leaving the center of said Township Road 215 North 90 degrees 00 minutes 00 seconds West a distance of 479.64 feet to the point of beginning, passing a 5/8" iron pin set at a distance of 30.00 feet, and containing 3.498 acres more or less, subject to the public easement of said Township Road 215 and any private easements of record.

The above 3.498 acre survey is intended to describe part of the remaining acreage of the various tracts as deeded to Tom M. Lloyd, deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, a subdivision plat, and an existing public road. The reference bearing for this survey is the South line of Section 11 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey or previously set are 5/8" by 30" (15" in roadway) and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered of Surveyor No. 6344, on April 24, 1996.

Approver Mathematically

ounty Engineer's office 1 AW vale 4-26-976

Survey by: \(\sum_{\text{Larry P. Gerstner - Engineering and Surveying}}\)

119 West Main Street, Logan, Ohio 43138

Know all Menby these Aresents

That MARY ANN SHOOP, Unmarried

This Cenveyance has been examined and the Grantor has complied with Section 319 202 of the Revised Code County Auditor
FEEE 4.30 EXEMPT

TRANSFERRED

70 € SEP 22 1976

LEONARD A. MYERS -

of the

City

nf.

Columbus

County of

Franklin

and State of

Ohio

in consideration of the sum of

One Dollar (\$1.00) and other valuable considerations,

to her

paid by

KENNETH E. NETTING AND MARY M. NETTING,

of the

of

County of

and State of

Ohio

hereby grant, burgain, sell and convey to the said

acknowledged, do

Grantees, KENNETH E. NETTING AND MARY M. NETTING

their

heirs and assigns forever, the

following Real Estate situated in the Country of

Hocking

in the State of

Ohio

and in the

Township

of

Laurel

and bounded and described as follows:

WILDCAT HOLLOW (SECOND TRACT)

Being a parcel off the Southwest Quarter of the Southeast Quarter of Section 11, Township 12 North, Range 18 West: beginning at an iron pipe on the East line of Wildcat Hollow Road where the same intersects the South line of Section 11; thence North 63° 25° East 218.7 feet to an iron pipe on the East side of said Wildcat Hollow Road; thence Eastwardly parallel with the South line of Section 11, 932 feet, more or less, to the East line of the Southwest Quarter of the Southeast Quarter of Section 11; thence South along said East line 146 feet, more or less, to the Southeast corner of said Southwest Quarter of the Southeast Quarter; thence West along the South line of Section 11, 1,101 feet to the place of beginning, containing 3.4 acres, more or less.

The foregoing description is based upon a survey made in April, 1962, by Virgil A. Eberly, Registered Surveyor No. 3566.

WILDCAT HOLLOW (THIRD TRACT)

Being a parcel off of the Southwest Quarter of the Southeast Quarter of Section
11 Township 12 North Range 18 West: the place of beginning located by stanting

Sec: 3. 28 At request of C.I. Goss m. S.E. corner of NE & N.W. & Sec	ade survey of Irregular	ine S.W. 4 of Sec. 2 jine shows loca	iontinued same	eline to nce.
	FROM RECORD F SURVEYS BOOK 1 PAGE 162 + 163 HOCKING COUNTY EN GINEERS OFFICE	,		
		a see a s		

REFERENCE BEARING:

Southwest corner

of Section 11

West line of Section 11 as North 0 degrees 00 miutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

 \otimes 1" OD iron pipe found

previously set

 \square Stone found

0.5/8" x 30" iron pin with 1-1/4"

plastic ID cap stamped LPG-6344

CERTIFICATION:

S

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 23rd day of October, 2001 and that the plat is a correct representation of the premises as described by said survey.

> Registered Surveyor No. 6344

200

100

SCALE:

1" = 200

Survey by:

Larry P. Gerstner — Engineering and Surveying 9 East Second Street, Suite A, Logan, Ohio 43138 (740) 385-4260

SURVEY DESCRIPTION OF A 41.803 ACRE TRACT FOR DONALD CANBY

Situated in Laurel Township, Hocking County, Ohio; being all of the Southeast quarter of the Northwest quarter of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a 1" OD iron pipe found at the Southwest corner of Section 11; thence with the West line of Section 11 North 0 degrees 00 minutes 00 seconds West a distance of 2683.98 feet to a 5/8" iron pin set, from which a stone previously found at the Northwest corner of Section 11 bears North 0 degrees 00 minutes 00 seconds West at a distance of 2683.98 feet; thence leaving the West line of Section 11 South 89 degrees 49 minutes 18 seconds East a distance of 1362.30 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence North 0 degrees 15 minutes 48 seconds East a distance of 1336.42 feet to a 5/8" iron pin set; thence South 89 degrees 35 minutes 19 seconds East a distance of 1368.47 feet to a 5/8" iron pin previously set;


thence South 0 degrees 31 minutes 44 seconds West a distance of 1330.88 feet to a 5/8" iron pin previously set;

thence North 89 degrees 49 minutes 18 seconds West a distance of 1362.30 feet to the point of beginning, containing 41.803 acres more or less, and subject to the public easement of Township Road 217, Unkle Road, and any other public or private easements of record.

The above 41.803 acre survey is intended to describe all of the 41 acre tract as deeded to Donald S. Canby, deed reference Volume OR151, Page 704, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 11 as North 0 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 23, 2001.

Jyw8 11-7-01

Dany P. Lenker

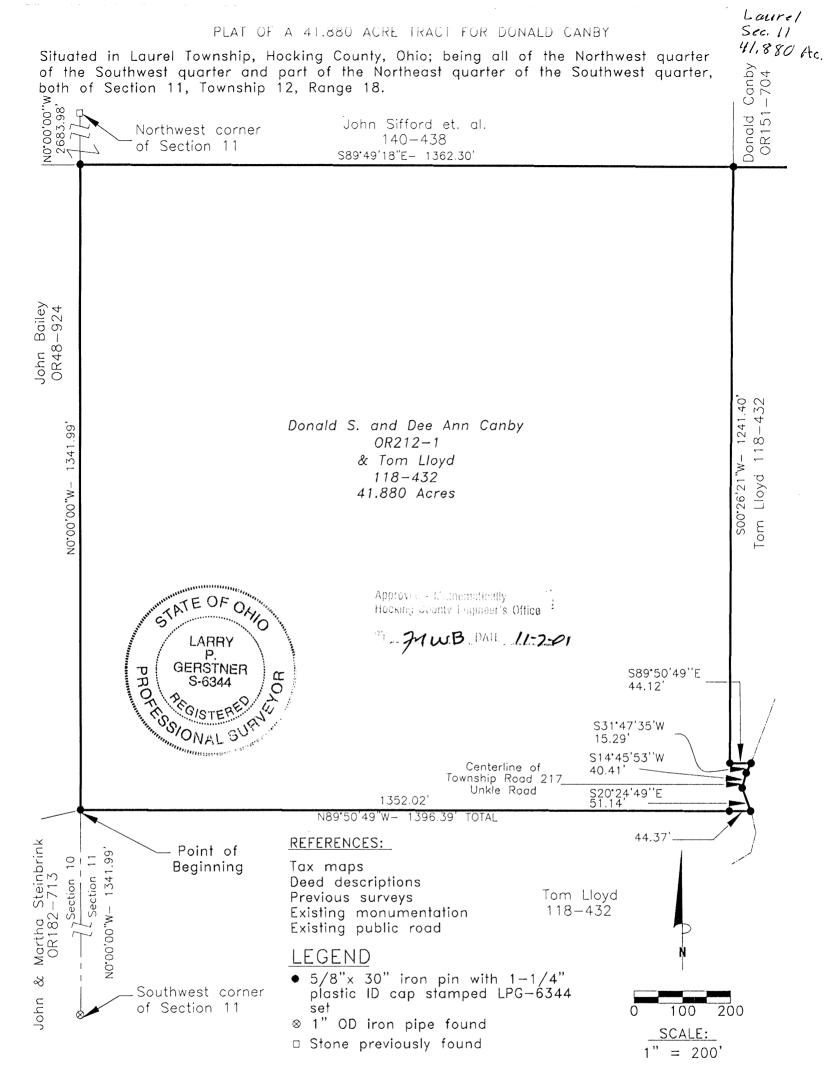

REFERENCE BEARING:

West line of Section 11 as North 0 degrees 00 miutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 23rd day of October, 2001 and that the plat is a correct representation of the premises as described by said survey.

Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner — Engineering and Surveying 9 East Second Street, Suite A, Logan, Ohio 43138 (740) 385—4260

SURVEY DESCRIPTION OF A 41.880 ACRE TRACT FOR DONALD CANBY

Situated in Laurel Township, Hocking County, Ohio; being all of the Northwest quarter of the Southwest quarter and part of the Northeast quarter of the Southwest quarter, both of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a 1" OD iron pipe found at the Southwest corner of Section 11; thence with the West line of Section 11 North 0 degrees 00 minutes 00 seconds West a distance of 1341.99 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence continuing with the West line of Section 11 North 0 degrees 00 minutes 00 seconds West a distance of 1341.99 feet to a 5/8" iron pin set, from which a stone previously found at the Northwest corner of Section 11 bears North 0 degrees 00 minutes 00 seconds West at a distance of 2683.98 feet;

thence leaving the West line of Section 11 South 89 degrees 49 minutes 18 seconds East a distance of 1362.30 feet to a 5/8" iron pin set;

thence South 0 degrees 26 minutes 21 seconds West a distance of 1241.40 feet to a 5/8" iron pin set;

thence South 89 degrees 50 minutes 49 seconds East a distance of 44.12 feet to a 5/8" iron pin set in the center of Township Road 217, Unkle Road;

thence with the center of said Township Road 217 the following three bearings and distances:

- 1) South 31 degrees 47 minutes 35 seconds West a distance of 15.29 feet to a 5/8" iron pin set;
- 2) South 14 degrees 45 minutes 53 seconds West a distance of 40.41 feet to a 5/8" iron pin set;
- 3) South 20 degrees 24 minutes 49 seconds East a distance of 51.14 feet to a 5/8" iron pin set;

thence leaving the center of said Township Road 217 North 89 degrees 50 minutes 49 seconds West a distance of 1396.39 feet to the point of beginning, passing a 5/8" iron pin set at a distance of 44.37 feet, containing 41.880 acres more or less, and subject to the public easement of said Township Road 217 and any other public or private easements of record.

The above 41.880 acre survey is intended to describe part of the various tracts as deeded to Tom Lloyd, deed reference 118, Page 432, and part of the 41.293 acre tract as deeded to Donald S. and Dee Ann Canby, deed reference Volume OR212, Page 1, both of the Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 11 as North 0 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 23, 2001.

LARRY P.

GERSTNER S-6344


OTH SOISTERED W

71WB 11-9-

Survey by:

15,000 AC

Situated in Laurel Township, Hocking County, Ohio; being part of the Northwest quarter of the Southeast quarter and part of the Southeast quarter both of Section 11, Township 12, Range 18.

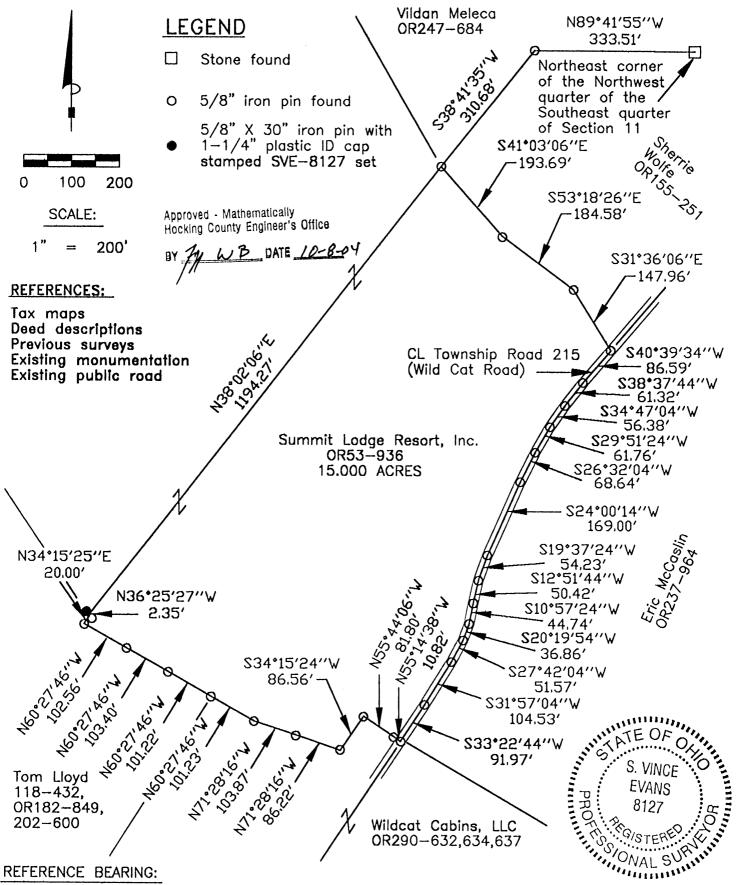

The West line of the Southwest quarter of the Northeast quarter of Section 11 as North 00 degrees 31 minutes 44 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 7th day of October , 2004 and that the plat is a correct representation of the premises as described by said survey.

Registered Surveyor No. 8127

Survey by:

SVE Surveying — S. Vince Evans P.S. 8127 37381 Davis Chapel Road, Logan, Ohio 43138 Phone (740) 380—3884 FAX (740) 380—0134

SURVEY DESCRIPTION OF A 15.000 ACRE TRACT FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being part of the Northwest quarter of the Southeast quarter and part of the Southwest quarter of the Southeast quarter both of Section 11, Township 12, Range 18; and being more particularly described as follows:

Being part of a 38.1306 acre tract as described in deed book Volume OR53, Page 936 to Summit Lodge Resort, Inc.

Commencing at a Stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11;

Thence with the north line of the Northwest quarter of the Southeast quarter, North 89 degrees 41 minutes 55 seconds West a distance of 333.51 feet to a 5/8" iron pin found;

Thence leaving the north line of the Northwest quarter of the Southeast quarter, South 38 degrees 41 minutes 35 seconds West a distance of 310.68 feet to a 5/8" iron pin found and being the point of Beginning of the tract of land to be described;

Thence South 41 degrees 03 minutes 06 seconds East a distance of 193.69 feet to a 5/8" iron pin found; Thence South 53 degrees 18 minutes 26 seconds East a distance of 184.58 feet to a 5/8" iron pin found; Thence South 31 degrees 36 minutes 06 seconds East a distance of 147.96 feet to a 5/8" iron pin found in the centerline of Township Road 215 (Wild Cat Road);

Thence with the centerline of said Township Road 215 (Wild Cat Road), the following bearings and distances:

- 1) South 40 degrees 39 minutes 34 seconds West a distance of 86.59 feet to a 5/8" iron pin found;
- 2) South 38 degrees 37 minutes 44 seconds West a distance of 61.32 feet to a 5/8" iron pin found;
- 3) South 34 degrees 47 minutes 04 seconds West a distance of 56.38 feet to a 5/8" iron pin found;
- 4) South 29 degrees 51 minutes 24 seconds West a distance of 61.76 feet to a 5/8" iron pin found;
- 5) South 26 degrees 32 minutes 04 seconds West a distance of 68.64 feet to a 5/8" iron pin found;
- 6) South 24 degrees 00 minutes 14 seconds West a distance of 169.00 feet to a 5/8" iron pin found;
- 7) South 19 degrees 37 minutes 24 seconds West a distance of 54.23 feet to a 5/8" iron pin found;
- 8) South 12 degrees 51 minutes 44 seconds West a distance of 50.42 feet to a 5/8" iron pin found;
- 9) South 10 degrees 57 minutes 24 seconds West a distance of 44.74 feet to a 5/8" iron pin found;
- 10) South 20 degrees 19 minutes 54 seconds West a distance of 36.86 feet to a 5/8" iron pin found;
- 11) South 27 degrees 42 minutes 04 seconds West a distance of 51.57 feet to a 5/8" iron pin found;
- 12) South 31 degrees 57 minutes 04 seconds West a distance of 104.53 feet to a 5/8" iron pin found;
- 13) South 33 degrees 22 minutes 44 seconds West a distance of 91.97 feet to a 5/8" iron pin found;

Thence leaving the centerline of said Township Road 215 (Wild Cat Road), North 55 degrees 14 minutes 38 seconds West a distance of 10.82 feet to a 5/8" iron pin found;

Thence North 55 degrees 44 minutes 06 seconds West a distance of 81.80 feet to a 5/8" iron pin found;

Thence South 34 degrees 15 minutes 24 seconds West a distance of 86.56 feet to a 5/8" iron pin found; Thence North 71 degrees 28 minutes 16 seconds West a distance of 86.22 feet to a 5/8" iron pin found;

Thence North 71 degrees 28 minutes 16 seconds West a distance of 103.87 feet to a 5/8" iron pin found;

Thence North 60 degrees 27 minutes 46 seconds West a distance of 101.23 feet to a 5/8" iron pin found;

Thence North 60 degrees 27 minutes 46 seconds West a distance of 101.22 feet to a 5/8" iron pin found;

Thence North 60 degrees 27 minutes 46 seconds West a distance of 103.40 feet to a 5/8" iron pin found;

Thence North 60 degrees 27 minutes 46 seconds West a distance of 102.56 feet to a 5/8" iron pin found; Thence North 34 degrees 15 minutes 25 seconds East a distance of 20.00 feet to a 5/8" iron pin found;

Thence North 36 degrees 25 minutes 27 seconds West a distance of 2.35 feet to a 5/8" iron pin set;

Thence North 38 degrees 02 minutes 06 seconds East a distance of 1194.27 feet to the point of beginning and containing 15.000 acres, more or less, subject to the public easement of said Township Road 215 (Wild Cat Road) and any public or private easements of record.

The above 15.000 acre survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the west line of the Southwest quarter of the Northeast quarter of Section 11 as North 00 degrees 31 minutes 44 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped "SVE-8127".

The above described property was surveyed by S. Vince Evans, Ohio Registered Surveyor No. 8127, on October 7, 2004.

S. Vince Evans, P. S. 8127

Survey by: SVE Surveying


S. Vince Evans, P. S. 8127 37381 Davis Chapel Road Logan, Ohio 43138 Phone (740) 380-3884 FAX (740) 380-0134

Approved - Mathematically Hocking County Engineer's Office

BY ANT DATE \$0-8-04

PLAT OF A 8.8902 AGRE TRAGE FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being part of the Southwest quarter of the Northeast quarter of Section 11, Township 12, Range 18.

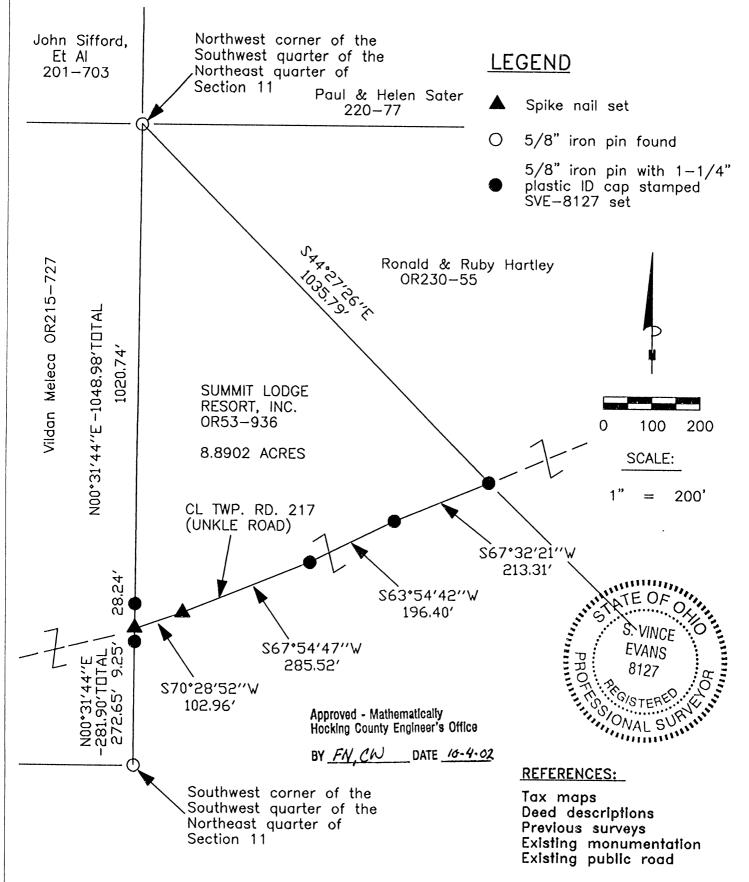

REFERENCE BEARING:

The West line of the Southwest quarter of the Northeast quarter of Section 11 as North 00 degrees 31 minutes 44 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 30th day of September , 2002 and that the plat is a correct representation of the premises as described by said survey.

Registered Surveyor No. 8127

Survey by:

SVE Surveying — S. Vince Evans P.S. 8127 37381 Davis Chapel Road, Logan, Ohio 43138 Phone (740) 380—3884 FAX (740) 380—0134

SURVEY DESCRIPTION OF A 8.8902 ACRE TRACT FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio. Being part of the Southwest quarter of the Northeast quarter of Section 11, Township 12, Range 18 and being more particularly described as follows:

Being part of a 55.27 acre tract as described in deed book Volume OR53, Page 936 to Summit Lodge Resort, Inc.

Commencing for reference at a 5/8" iron pin found at the Southwest corner of the Southwest quarter of the Northeast quarter of Section 11;

Thence with the West line of the Southwest quarter of the Northeast quarter, North 00 degrees 31 minutes 44 seconds East a distance of 281.90 feet to a Spike nail set in the centerline of Township Road 217 (Unkle Road), passing a 5/8" iron pin set at a distance of 272.65 feet and being the point of beginning of the tract of land to be described;

Thence leaving the centerline of said road and with the West line of the Southwest quarter of the Northeast quarter, North 00 degrees 31 minutes 44 seconds East a distance of 1048.98 feet to a 5/8" iron pin found at the Northwest corner of the Southwest quarter of the Northeast quarter, and passing a 5/8" iron pin set at a distance of 28.24 feet;

Thence South 44 degrees 27 minutes 26 seconds East a distance of 1035.79 feet to a 5/8" iron pin set in the centerline of Township Road 217;

Thence with the centerline of Township Road 217, the following bearings and distances:

- 1. South 67 degrees 32 minutes 21 seconds West a distance of 213.31 feet to a 5/8" iron pin set;
- 2. South 63 degrees 54 minutes 42 seconds West a distance of 196.40 feet to a 5/8" iron pin set;
- 3. South 67 degrees 54 minutes 47 seconds West a distance of 285.52 feet to a Spike nail set;
- 4. South 70 degrees 28 minutes 52 seconds West a distance of 102.96 feet to the point of beginning and containing 8.8902 acres, more or less, subject to the public easements of Township Road 217 and any other public or private easements of record.

The above 8.8902 acre survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation and existing public roads. The reference bearing for this survey is the west line of the Southwest quarter of the Northeast quarter of Section 11 as North 00 degrees 31 minutes 44 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

All iron pins set by this survey are 5/8" X 30" and are capped by a 1-1/4" plastic identification cap stamped "SVE-8127".

The above described property was surveyed by S. Vince Evans, Ohio Registered Surveyor No. 8127, on September 30, 2002.

S. Vince Evans, P. S. 8127


Surveyed by: SVE Surveying
S. Vince Evans, P. S. 8127 37381 Davis Chapel Road Logan, Ohio 43138 Phone (740) 380-3884 FAX (740) 380-0134

PROTING/OTERES.

Approved - Mathematically Hocking County Engineer's Office

BY FN, CW DATE 10-4-02

Situated in Laurel Township, Hocking County, Ohio; being part of the Southwest quarter of the Northeast quarter and part of the Northwest quarter of the Southeast quarter both of Section 11, Township 12, Range 18.

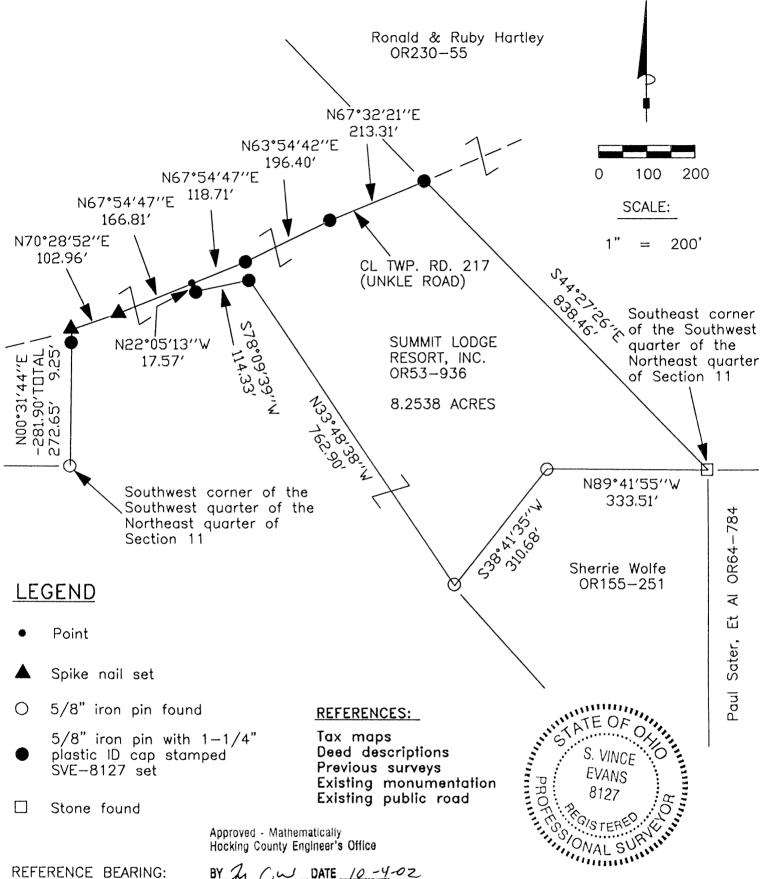

BY 24 CW DATE 10-4-02

The West line of the Southwest quarter of the Northeast quarter of Section 11 as North 00 degrees 31 minutes 44 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 30th day of September , 2002 and that the plat is a correct representation of the premises as described by said survey.

S. Vniv Crws
Registered Surveyor No. 8127

Survey by:

SVE Surveying — S. Vince Evans P.S. 8127 37381 Davis Chapel Road, Logan, Ohio 43138 Phone (740) 380—3884 FAX (740) 380—0134

SURVEY DESCRIPTION OF A 8.2538 ACRE TRACT FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio. Being part of the Southwest quarter of the Northeast quarter and part of the Northwest quarter of the Southeast quarter both of Section 11, Township 12, Range 18 and being more particularly described as follows:

Being part of a 55.27 acre tract as described in deed book Volume OR53, Page 936 to Summit Lodge Resort, Inc.

Commencing for reference at a 5/8" iron pin found at the Southwest corner of the Southwest quarter of the Northeast quarter of Section 11;

Thence with the West line of the Southwest quarter of the Northeast quarter, North 00 degrees 31 minutes 44 seconds East a distance of 281.90 feet to a Spike nail set in the centerline of Township Road 217 (Unkle Road), passing a 5/8" iron pin set at a distance of 272.65 feet;

Thence with the centerline of said road North 70 degrees 28 minutes 52 seconds East a distance of 102.96 feet to a Spike nail set;

Thence with the centerline of said road North 67 degrees 54 minutes 47 seconds East a distance of 166.81 feet to a Point and being the **point of beginning** of the tract of land to be described;

Thence with the centerline of Township Road 217, the following bearings and distances:

- 1. North 67 degrees 54 minutes 47 seconds East a distance of 118.71 feet to a 5/8" iron pin set;
- 2. North 63 degrees 54 minutes 42 seconds East a distance of 196.40 feet to a 5/8" iron pin set;
- 3. North 67 degrees 32 minutes 21 seconds East a distance of 213.31 feet to a 5/8" iron pin set;

Thence leaving the centerline of said road, South 44 degrees 27 minutes 26 seconds East a distance of 838.46 feet to a Stone found at the Southeast corner of the Southwest quarter of the Northeast quarter;

Thence North 89 degrees 41 minutes 55 seconds West a distance of 333.51 feet to a 5/8" iron pin found;

Thence South 38 degrees 41 minutes 35 seconds West a distance of 310.68 feet to a 5/8" iron pin found;

Thence North 33 degrees 48 minutes 38 seconds West a distance of 762.90 feet to a 5/8" iron pin

Thence South 78 degrees 09 minutes 39 seconds West a distance of 114.33 feet to a 5/8" iron pin

Thence North 22 degrees 05 minutes 13 seconds West a distance of 17.57 feet to the point of beginning and containing 8.2538 acres, more or less, subject to the public easements of Township Road 217 and any other public or private easements of record.

The above 8.2538 acre survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation and existing public roads. The reference bearing for this survey is the west line of the Southwest quarter of the Northeast quarter of Section 11 as North 00 degrees 31 minutes 44 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

All iron pins set by this survey are 5/8" X 30" and are capped by a 1-1/4" plastic identification cap stamped "SVE-8127".

IS, Oh. The above described property was surveyed by S. Vince Evans, Ohio Registered Surveyor No. 8127, on September 30, 2002. EVAN.
8127

ROYSTERES

S. Vince Evans, P. S. 8127

Surveyed by: SVE Surveying S. Vince Evans, P. S. 8127 37381 Davis Chapel Road Logan, Ohio 43138 Phone (740) 380-3884

FAX (740) 380-0134


Approved - Mathematically Hocking County Engineer's Office

DATE 10-4-02

PLAT OF A 2810.15 FOOT LONG BY 40 FOOT
WIDE PRIVATE EASEMENT OF INGRESS AND EGRESS FOR TOM LLOYD

2 Easement

Situated in Laurel Township, Hocking County, Ohio; being the centerline of a 2810.15 foot long by 40 foot wide private easement of ingress and egress; and being part of Section 11, Township 12, Range 18.

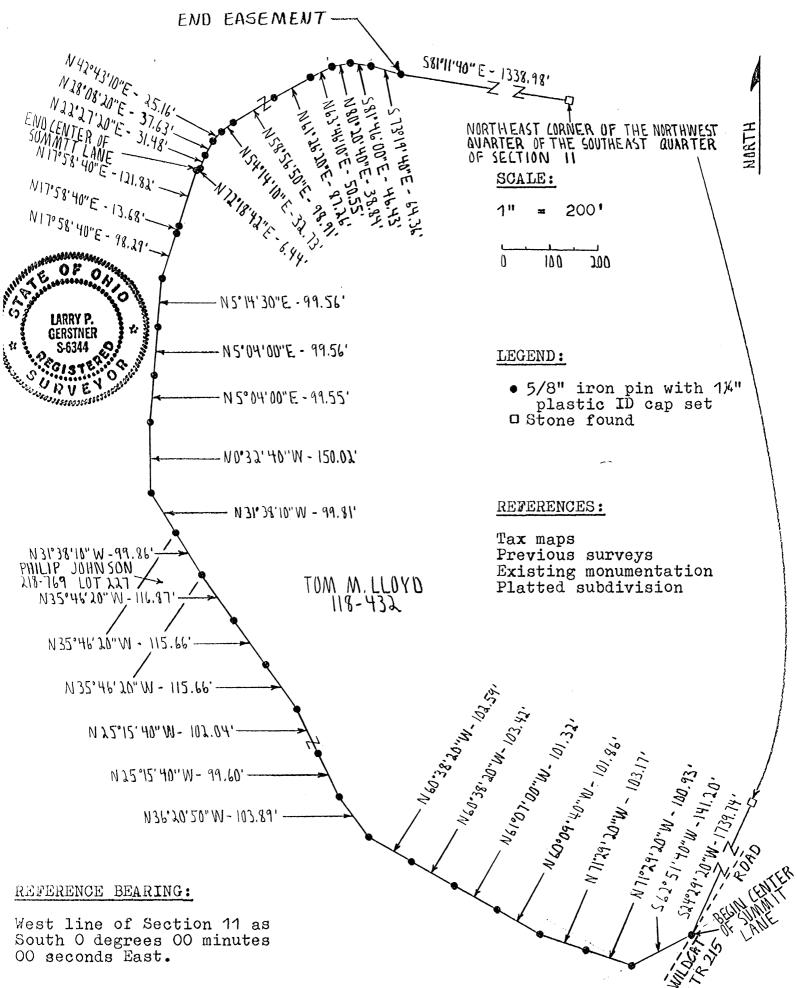

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved - Mathematically
Hocking County Engineer's office
By LTV Date 12-26-11

Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main St., Logan, Ohio 43138 385-4260

SURVEYED CENTERLINE DESCRIPTION OF A 2810.15 FOOT LONG BY 40 FOOT WIDE PRIVATE EASEMENT OF INGRESS AND EGRESS FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being the centerline of a 2810.15 foot long by 40 foot wide private easement of ingress and egress; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 24 degrees 29 minutes 20 seconds West a distance of 1739.74 feet to a 5/8" iron pin set at the West edge of Township Road 215, Wildcat Road, and center of the platted Summit Lane of Summit Haven Subdivision as recordered in Plat Book E, Page 10, Hocking County Recorder's Office, and being the point of beginning of the centerline easement to be described;

thence with the center of said Summit Lane the following twenty-two bearings and distances:

- 1) South 62 degrees 51 minutes 40 seconds West a distance of 141.20 feet to a 5/8" iron pin set;
- 2) North 71 degrees 29 minutes 20 seconds West a distance of 100.93 feet to a 5/8" iron pin set;
- 3) North 71 degrees 29 minutes 20 seconds West a distance of 103.17 feet to a 5/8" iron pin set;
- 4) North 60 degrees 09 minutes 40 seconds West a distance of 101.86 feet to a 5/8" iron pin set;
- 5) North 61 degrees 07 minutes 00 seconds West a distance of 101.32 feet to a 5/8" iron pin set;
- 6) North 60 degrees 38 minutes 20 seconds West a distance of 103.42 feet to a 5/8" iron pin set;
- 7) North 60 degrees 38 minutes 20 seconds West a distance of 102.59 feet to a 5/8" iron pin set;
- 8) North 36 degrees 20 minutes 50 seconds West a distance of 103.89 feet to a 5/8" iron pin set;
- 9) North 25 degrees 15 minutes 40 seconds West a distance of 99.60 feet to a 5/8" iron pin set;
- 10) North 25 degrees 15 minutes 40 seconds West a distance of 102.04 feet to a 5/8" iron pin set;
- 11) North 35 degrees 46 minutes 20 seconds West a distance of 115.66 feet to a 5/8" iron pin set;
- 12) North 35 degrees 46 minutes 20 seconds West a distance of 115.66 feet to a 5/8" iron pin set;
- 13) North 35 degrees 46 minutes 20 seconds West a distance of 116.87 feet to a 5/8" iron pin set;
- 14) North 31 degrees 38 minutes 10 seconds West a distance of 99.86 feet to a 5/8" iron pin set;
- 15) North 31 degrees 38 minutes 10 seconds West a distance of 99.81 feet to a 5/8" iron pin set;
- 16) North O degrees 32 minutes 40 seconds West a distance of 150.02 feet to a 5/8" iron pin set;
- 17) North 5 degrees 04 minutes 00 seconds East a distance of 99.55 feet to a 5/8" iron pin set;
- 18) North 5 degrees 04 minutes 00 seconds East a distance of 99.56 feet to a 5/8" iron pin set;
- 19) North 5 degrees 14 minutes 30 seconds East a distance of 99.56 feet to a 5/8" iron pin set;

20) North 17 degrees 58 minutes 40 seconds East a distance of 98.29 feet to a 5/8" iron pin set;

21) North 17 degrees 58 minutes 40 seconds East a distance

of 13.68 feet to a 5/8" iron pin set;

22) North 17 degrees 58 minutes 40 seconds East a distance of 121.82 feet to a 5/8" iron pin set at the end of said Summit Lane;

thence continuing the following eleven bearings and distances:

1) North 72 degrees 18 minutes 42 seconds East a distance of 6.44 feet to a 5/8" iron pin set;

2) North 22 degrees 27 minutes 20 seconds East a distance of 31.48 feet to a 5/8" iron pin set;

3) North 28 degrees 08 minutes 20 seconds East a distance of 37.63 feet to a 5/8" iron pin set;

4) North 42 degrees 43 minutes 10 seconds East a distance of 25.16 feet to a 5/8" iron pin set;

5) North 54 degrees 14 minutes 10 seconds East a distance of 32.73 feet to a 5/8" iron pin set;

6) North 58 degrees 56 minutes 50 seconds East a distance of 98.91 feet to a 5/8" iron pin set;

7) North 61 degrees 26 minutes 20 seconds East a distance of 87.26 feet to a 5/8" iron pin set;

8) North 63 degrees 46 minutes 10 seconds East a distance of 50.55 feet to a 5/8" iron pin set;

9) North 80 degrees 20 minutes 40 seconds East a distance of 38.84 feet to a 5/8" iron pin set;

10) South 81 degrees 46 minutes 00 seconds East a distance of 46.43 feet to a 5/8" iron pin set;

11) South 73 degrees 19 minutes 40 seconds East a distance of 64.36 feet to a 5/8" iron pin set and being the end of said 2810.15 foot long by 40 foot wide centerline description of an easement of ingress and egress, from which said beginning reference stone found bears South 81 degrees 11 minutes 40 seconds East at a distance of 1338.98 feet, and subject to any other private easements of record.


The above 2810.15 foot long centerline surveyed easement is intended to extend through various tracts of land as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 20, 1991.

Approved - Mathematically
Hocking County Engineer's office
By LFN Date 12-26-97

Survey by:

Tang P. Verste

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260 Situated in Laurel Township, Hocking County, Ohio; being the centerline of a 3104.41 foot long by 40 foot wide private easement of ingress and egress; and being part of Section 11, Township 12, Range 18.

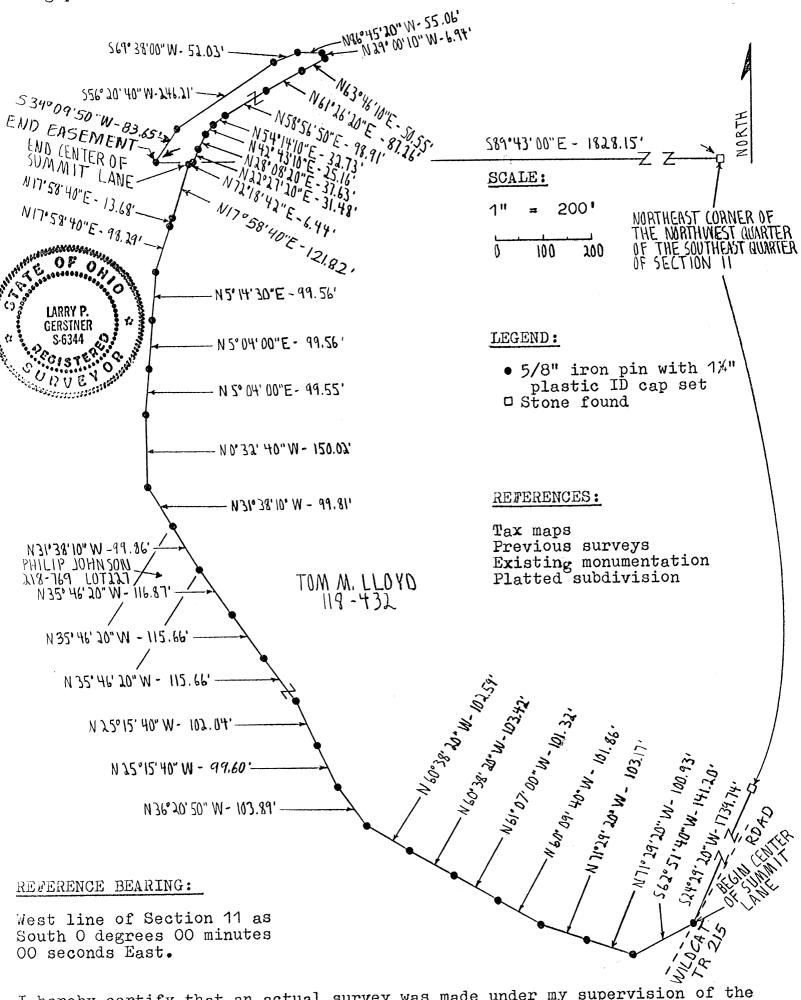

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of December, 1991 and that the plat is a correct representation of the premises as described by said survey.

Approved - Mathematically
Hocking County Engineer's office
By Date 12-26-91

Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main St., Logan, Ohio 43138 385-4260

SURVEYED CENTERLINE DESCRIPTION OF A 3104.41 FOOT LONG BY 40 FOOT WIDE PRIVATE EASEMENT OF INGRESS AND EGRESS FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being the centerline of a 3104.41 foot long by 40 foot wide private easement of ingress and egress; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11; thence South 24 degrees 29 minutes 20 seconds West a distance of 1739.74 feet to a 5/8" iron pin set at the West edge of Township Road 215, Wildcat Road, and center of the platted Summit Lane of Summit Haven Subdivision as recordered in Plat Book E, Page 10, Hocking County Recorder's Office, and being the point of beginning of the centerline easement to be described;

thence with the center of said Summit Lane the following twenty-two bearings and distances:

1) South	62 degrees 51 minutes	40 seconds	West	a	distance	of
	a 5/8" iron pin set;					
2) North	71 degrees 29 minutes	20 seconds	West	a	distance	of
100.93 feet to	a 5/8" iron pin set;					

- 3) North 71 degrees 29 minutes 20 seconds West a distance of 103.17 feet to a 5/8" iron pin set;
- 4) North 60 degrees 09 minutes 40 seconds West a distance of 101.86 feet to a 5/8" iron pin set;
- 5) North 61 degrees $0\overline{7}$ minutes 00 seconds West a distance of 101.32 feet to a 5/8" iron pin set;
- 6) North 60 degrees 38 minutes 20 seconds West a distance of 103.42 feet to a 5/8" iron pin set;
- 7) North 60 degrees 38 minutes 20 seconds West a distance of 102.59 feet to a 5/8" iron pin set;
- 8) North 36 degrees 20 minutes 50 seconds West a distance of 103.89 feet to a 5/8" iron pin set;
- 9) North 25 degrees 15 minutes 40 seconds West a distance of 99.60 feet to a 5/8" iron pin set;
- 10) North 25 degrees 15 minutes 40 seconds West a distance of 102.04 feet to a 5/8" iron pin set;
- 11) North 35 degrees 46 minutes 20 seconds West a distance of 115.66 feet to a 5/8" iron pin set;
- 12) North 35 degrees 46 minutes 20 seconds West a distance of 115.66 feet to a 5/8" iron pin set;
- 13) North 35 degrees 46 minutes 20 seconds West a distance of 116.87 feet to a 5/8" iron pin set;
- 14) North 31 degrees 38 minutes 10 seconds West a distance of 99.86 feet to a 5/8" iron pin set;
- 15) North 31 degrees 38 minutes 10 seconds West a distance of 99.81 feet to a 5/8" iron pin set;
- 16) North 0 degrees 32 minutes 40 seconds West a distance of 150.02 feet to a 5/8" iron pin set;
- 17) North 5 degrees 04 minutes 00 seconds East a distance of 99.55 feet to a 5/8" iron pin set;
- 18) North 5 degrees 04 minutes 00 seconds East a distance of 99.56 feet to a 5/8" iron pin set;
- 19) North 5 degrees 14 minutes 30 seconds East a distance of 99.56 feet to a 5/8" iron pin set;
 - 20) North 17 degrees 58 minutes 40 seconds East a distance of

98.29 feet to a 5/8" iron pin set;

21) North 17 degrees 58 minutes 40 seconds East a distance of 13.68 feet to a 5/8" iron pin set;

22) North 17 degrees 58 minutes 40 seconds East a distance of 121.82 feet to a 5/8" iron pin set at the end of said Summit Lane;

thence continuing the following thirteen bearings and distances:

1) North 72 degrees 18 minutes 42 seconds East a distance of

6.44 feet to a 5/8" iron pin set;2) North 22 degrees 27 minutes 20 seconds East a distance of

31.48 feet to a 5/8" iron pin set;
3) North 28 degrees 08 minutes 20 seconds East a distance of

37.63 feet to a 5/8" iron pin set;

4) North 42 degrees 43 minutes 10 seconds East a distance of 25.16 feet to a 5/8" iron pin set;

5) North 54 degrees 14 minutes 10 seconds East a distance of 32.73 feet to a 5/8" iron pin set;

6) North 58 degrees 56 minutes 50 seconds East a distance of 98.91 feet to a 5/8" iron pin set;

7) North 61 degrees 26 minutes 20 seconds East a distance of 87.26 feet to a 5/8" iron pin set;

8) North 63 degrees 46 minutes 10 seconds East a distance of 50.55 feet to a 5/8" iron pin set;

9) North 29 degrees 00 minutes 10 seconds West a distance of 6.94 feet to a 5/8" iron pin set;

10) North 86 degrees 45 minutes 20 seconds West a distance of 55.06 feet to a 5/8" iron pin set;

11) South 69 degrees 38 minutes 00 seconds West a distance of 52.03 feet to a 5/8" iron pin set;

12) South 56 degrees 20 minutes 40 seconds West a distance of 246.21 feet to a 5/8" iron pin set;

13) South 34 degrees 09 minutes 50 seconds West a distance of 83.65 feet to a 5/8" iron pin set and being the end of said 3104.41 foot long by 40 foot wide centerline description of an easement of ingress and egress, from which said beginning reference stone found bears South 89 degrees 43 minutes 00 seconds East at a distance of 1828.15 feet, and subject to any other private easements of record.


The above 3104.41 foot long centerline surveyed easement is intended to extend through various tracts of land as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the West line of Section 11 as South O degrees 00 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on December 20, 1991.

Approved - Mathematically
Hocking County Engineer's office
By A Date 12-26-97

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260 PLAT OF .542 AND .172 ACRE SURVEYS FOR JAMES GOLATA .542AL.

Situated in Laurel Township, Hocking County, Ohio: being Lot 233 and a platting error lying between Lots 233 and 231 all of the Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Crice; and being part of Section 11, Township 12, Range 18.

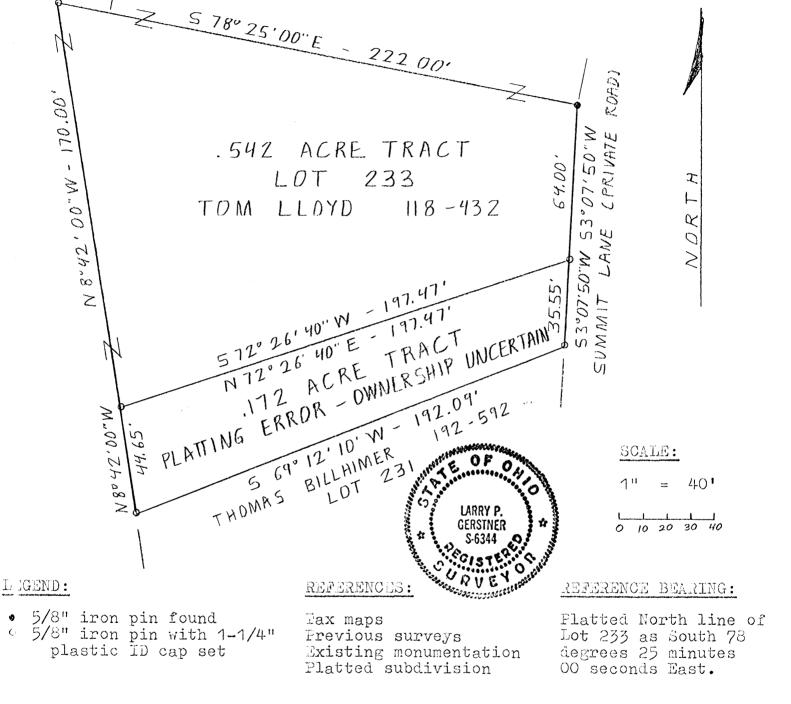

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 25th day of April, 1988 and that the plat is a correct representation of the premises as described by said survey.

Approved - Mathematically
Hocking County Engineer's offic

By Aw M 511 4-27-88

* .542 Ac. Existing Tract

CONDITIONAL APPROVAL/TRANSFER-Not to be used as separate building site or transferred as an independent parcel in the future without Planning Commission and/or health Dept. approval. 172 Ac. Only

Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main St., Logan, Chio 43138 385-4260

SURVEY DESCRIPTION OF .542 ACRE LOT 233 OF

SUMMIT HAVEN HOLLOW SUBDIVISION FOR JAMES GOLATA

Situated in Laurel Township, Hocking County, Ohio; being all of Lot 233 of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Beginning at a 5/8" iron pin found at the Northeast corner of said Lot 233; thence South 3 degrees 07 minutes 50 seconds West a distance of 64.00 feet to a 5/8" iron pin set at the Southeast corner of said Lot 233; thence South 72 degrees 26 minutes 40 seconds West a distance of 197.47 feet to a 5/8" iron pin set at the Southeast corner of said Lot 233; thence North 8 degrees 42 minutes 00 seconds West a distance of 170.00 feet to a 5/8" iron pin set at the Northwest corner of said Lot 233; thence South 78 degrees 25 minutes 00 seconds East a distance of 222.00 feet to the point of beginning containing .542 acres more or less, subject to any private easements of record.

The above .542 acre survey is intended to describe all of Lot 233 as deeded to the origonal subdivision platter Tom Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the platted North line of Lot 233 as South 78 degrees 25 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on April 25, 1988.

LARRY P.
GERSTNER
S-6344
P.
C137C

Survey by:

Lang P. Venter

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

Approved - Mathematically #
Hocking County Engineer's office
By R-FN Date 4-27-80

* Existing Tract

SURVEY DESCRIPTION OF .172 ACRE TRACT LYING BETWEEN LOTS 233 AND 231 OF SUMMIT HAVEN HOLLOW SUBDIVISION FOR JAMES GOLATA

Situated in Laurel Township, Hocking County, Ohio; being a platting error lying between Lots 233 and 231 of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office; being part of Section 11, Township 12, Range 18; and being more particularly described as follows:

Beginning at a 5/8" iron pin set at the Southeast corner o f 233; thence South 3 degrees 07 minutes 50 seconds West a distance οf 35.55 feet to a 5/8" iron pin set at the Northeast corner of said Lot 231; South 69 degrees 12 minutes 10 seconds West a distance of 192.09 feet 5/8" iron pin set at the Northwest corner of said Lot 231; thence North 8 degrees 42 minutes 00 seconds West a distance of 44.65 feet to iron pin set at the Southwest corner of said Lot 233; thence North 72 degrees minutes 40 seconds East a distance of 197.47 feet to the point of beginning containing .172 acres more or less, subject to any private easements of record.

The above .172 acre survey is intended to describe all of platting error lying between Lots 233 and 231 as deeded to the or igonal subdivision platter Tom Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and a platted subdivision. The reference bearing for this survey is the platted North line of Lot 233 as South 78 degrees 25 minutes 00 seconds East. All iron pins set by this survey are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on April 25, 1988.



Survey by:

Yang P. Venter


Larry P. Gerstner - Engineering and Surveying 113 West Main Street, Logan, Ohio 43138 385-4260

Approved - Mathematically *
Hocking County Engineer's office
By F. F. Date 4-27-83

CONDITIONAL APPROVAL/TRANSFER-Not to be used as separate building site or transferred as an independent parcel in the future without Planning Commission and/or health Dept. approval.

LAUREL # /

Situated in Laurel Township, Hocking County, Ohio; being part of the Northwest quarter of the Southeast quarter and part of the Southwest quarter of the Southeast quarter, both of Section 11, Township 12, Range 18.

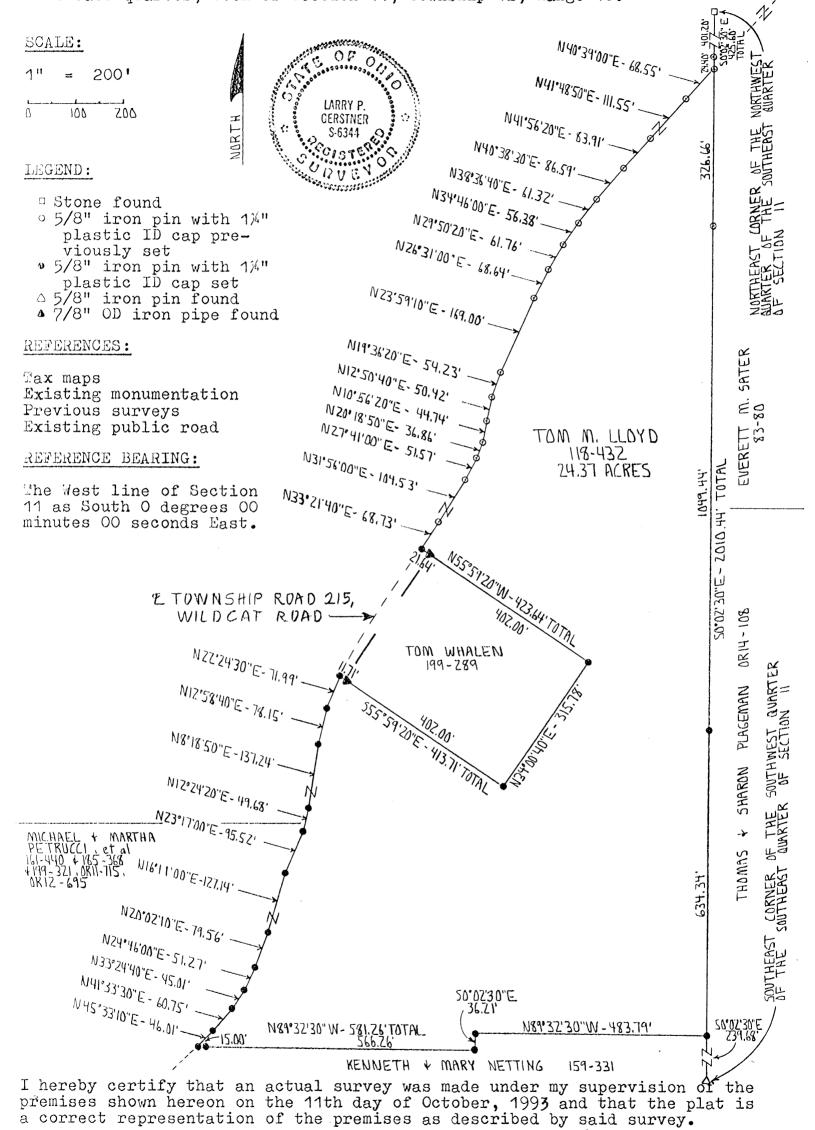

Survey by: Larry P. 6

Approved Marib Hocking County Engineer's with

Larry P. Gerstner - Engineering and Surveying 119 West Main St., Logan, Ohio 43138 385-4260

cum

Registered Surveyor

Situated in Laurel Township, Hocking County, Ohio; being part of the Northwest quarter of the Southeast quarter and part of Southwest quarter of the Southeast quarter, both of Section the 11, Township 12. Range 18; and being more particularly described as

Commencing for reference at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11:

thence South 0 degrees 02 minutes 30 seconds East a distance of 425.60 feet to a 5/8" iron pin previously set in the center of Township Road 215. Wildcat Road, passing a 5/8" iron pin previously set at a distance of 401.20 feet, and being the point of Beginning of the tract of land to be described:

thence continuing South 0 degrees 02 minutes 30 seconds a distance of 2010.44 feet to a 5/8" iron pin set. passing a East iron pin previously set at a distance of 326.66 feet and a iron pin set at a distance of 1376.10 feet, and from which a 5/8" iron pin found at the Southeast corner of the Southwest quarter of the Southeast quarter of Section 11 bears South 0 degrees 02 minutes 30 seconds East at a distance of 239.68 feet;

thence North 89 degrees 32 minutes 30 seconds West a distance of 483.79 feet to a $5/8^{n}$ iron pin set;

thence South 0 degrees 02 minutes 30 seconds East a distance of 36.21 feet to a 5/8" iron pin set;

thence North 89 degrees 32 minutes 30 seconds West a distance of 581.26 feet to a 5/8" iron pin set in the center of said Township Road 215 and passing a 5/8" iron pin set at a distance of 566.26 feet:

thence with the center of said Township Road 215 the following eleven bearings and distances:
1) North 45 degrees 33 minutes 10 seconds East a distance

- 46.01 feet to a 5/8" iron pin set;
- 2) North 41 degrees 33 minutes 30 seconds East a distance of 60.75 feet to a 5/8" iron pin set;
- 3) North 33 degrees 24 minutes 40 seconds East a distance of 45.01 feet to a 5/8" iron pin set;
- 4) North 24 degrees 46 minutes 00 seconds East a distance 51.27 feet to a 5/8" iron pin set:
- 5) North 20 degrees 02 minutes 10 seconds East a distance 79.56 feet to a 5/8" iron pin set;
- 6) North 16 degrees 11 minutes 00 seconds East a distance οť
- 127.14 feet to a 5/8" iron pin set;
 7) North 23 minutes 17 seconds 00 seconds East a distance 95.52 feet to a 5/8" iron pin set;
- 8) North 12 degrees 24 minutes 20 seconds East a distance 49.68 feet to a 5/8" iron pin set;
- 9) North 8 degrees 18 minutes 50 seconds East a distance 137.24 feet to a 5/8" iron pin set;
- 10) North 12 degrees 58 minutes 40 seconds East a distance of
- 78.15 feet to a 5/8" iron pin set;
 11) North 22 degrees 24 minutes 30 seconds East a distance 71.99 feet to a 5/8" iron pin set;

thence leaving the center of said Township Road 215 South 55 degrees 59 minutes 20 seconds East a distance of 413.71 feet to 5/8" iron pin set and passing a 7/8" OD iron pipe found at distance of 11.71 feet;

thence North 34 degrees 00 minutes 40 seconds East a distance of 315.78 feet to a 5/8" iron pin set;

thence North 55 degrees 59 minutes 20 seconds West a distance of 423.64 feet to a 5/8" iron pin set in the center of said Township Road 215 and passing a 7/8" OD iron pipe found at a distance of 402.00 feet;

thence with the center of said Township Road 215 the following sixteen bearings and distances:

- 1) North 33 degrees 21 minutes 40 seconds East a distance of
- 68.73 feet to a 5/8" iron pin previously set;
 2) North 31 degrees 56 minutes 00 seconds East a distance of 104.53 feet to a 5/8" iron pin previously set;
- 3) North 27 degrees 41 minutes 00 seconds East a distance of 51.57 feet to a 5/8" iron pin previously set;

- North 20 degrees 18 minutes 50 seconds East a distance
- 36.86 feet to a 5/8" iron pin previously set;
 5) North 10 degrees 56 minutes 20 seconds East a distance 44.74 feet to a 5/8" iron pin previously set;
- 6) North 12 degrees 50 minutes 40 seconds East a distance 50.42 feet to a 5/8" iron pin previously set;
- 7) North 19 degrees 36 minutes 20 seconds East a distance of 54.23 feet to a 5/8" iron pin previously set;
- 8) North 23 degrees 59 minutes 10 seconds East a distance
- 169.00 feet to a 5/8" iron pin previously set;
 9) North 26 degrees 31 minutes 00 seconds East of 68.64 feet to a 5/8" iron pin previously set;
- 10) North 29 degrees 50 minutes 20 seconds East a distance
- 61.76 feet to a 5/8" iron pin previously set;
 11) North 34 degrees 46 minutes 00 seconds East a distance 56.38 feet to a 5/8" iron pin previously set;
- 12) North 38 degrees 36 minutes 40 seconds East a distance 61.32 feet to a 5/8" iron pin previously set;
 13) North 40 degrees 38 minutes 30 seconds East a distance of 86.59 feet to a 5/8" iron pin previously set;
- 14) North 41 degrees 56 minutes 20 seconds East a distance 83.91 feet to a 5/8" iron pin previously set;
- 15) North 41 degrees 48 minutes 50 seconds East a distance of 111.55 feet to a 5/8" iron pin previously set;
- 16) North 40 degrees 39 minutes 00 seconds East a distance 68.55 feet to the point of beginning containing 24.37 acres more or less, subject to the public easement of said Township Road 215 and any private easements of record.

The above 24.37 acre survey is intended to describe part the Northwest quarter of the Southeast quarter and part of the Southwest quarter of the Southeast quarter both of Section 11 as deeded to Tom M. Lloyd by deed reference Volume 118. Page 432, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West Line of Section 11 as South O degrees for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey or previously set are capped by a 1-1/4" plastic identification cap. The above described property was surveyed by Larry P. Gerstner. Ohio Registered Surveyor No. 6344, on October 11, 1993.

Approved - Methanial Hocking County Englace B) Jy Aw Date 10-12-93

Survey by:

Tang V. Venter

(5°5°


LARRY P

UVE

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

Pade 2

Laurel Situated in Laurel Township, Hocking County, Ohio; being part of the Southwest duarter of the Northeast quarter and part of the Northeast quarter of the Southwest quarter all of Section 11, Township 12, Range 18.

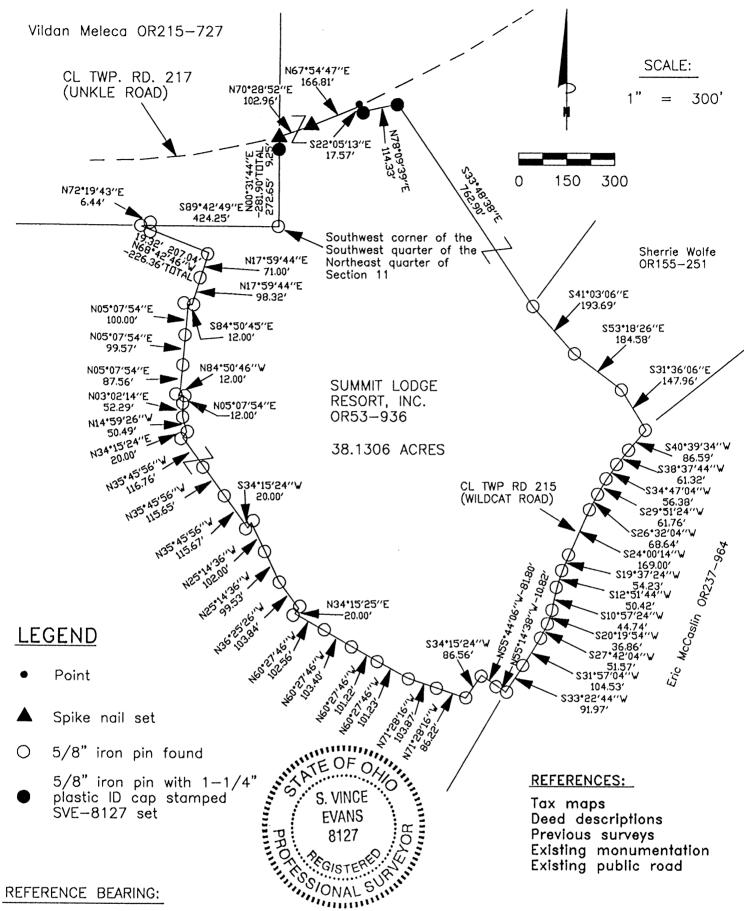

The West line of the Southwest quarter of the Northeast quarter of Section 11 as North 00 degrees 31 minutes 44 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 30th day of September , 2002 and that the plat is a correct representation of the premises as described by said survey.

Registered Surveyor No. 8127

Survey by:

SVE Surveying — S. Vince Evans P.S. 8127 37381 Davis Chapel Road, Logan, Ohio 43138 Phone (740) 380—3884 FAX (740) 380—0134

Approved - Mathematically Hocking County Engineer's Office

BY Jy Cus DATE 10-25-02

SURVEY DESCRIPTION OF A 38.1306 ACRE TRACT FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio. Being part of the Southwest quarter of the Northeast quarter, part of the Northwest quarter of the Southeast quarter and part of the Northeast quarter of the Southwest quarter all of Section 11, Township 12, Range 18 and being more particularly described as follows:

Being part of a 55.27 acre tract as described in deed book Volume OR53, Page 936 to Summit Lodge Resort, Inc.

Beginning at a 5/8" iron pin found at the Southwest corner of the Southwest quarter of the Northeast quarter of Section 11;

Thence with the West line of the Southwest quarter of the Northeast quarter, North 00 degrees 31 minutes 44 seconds East a distance of 281.90 feet to a Spike nail set in the centerline of Township Road 217 (Unkle Road), passing a 5/8" iron pin set at a distance of 272.65 feet;

Thence with the centerline of said road and leaving the West line of the Southwest quarter of the Northeast quarter, North 70 degrees 28 minutes 52 seconds East a distance of 102.96 feet to a Spike nail set;

Thence with the centerline of said road, North 67 degrees 54 minutes 47 seconds East a distance of 166.81 feet to a Point;

Thence leaving the centerline of said road, South 22 degrees 05 minutes 13 seconds East a distance of 17.57 feet to a 5/8" iron pin set;

Thence North 78 degrees 09 minutes 39 seconds East a distance of 114.33 feet to a 5/8" iron pin set;

Thence South 33 degrees 48 minutes 38 seconds East a distance of 762.90 feet to a 5/8" iron pin found:

Thence South 41 degrees 03 minutes 06 seconds East a distance of 193.69 feet to a 5/8" iron pin found;

Thence South 53 degrees 18 minutes 26 seconds East a distance of 184.58 feet to a 5/8" iron pin found;

Thence South 31 degrees 36 minutes 06 seconds East a distance of 147.96 feet to a 5/8" iron pin found in the centerline of Township Road 215 (Wildcat Road);

Thence with the centerline of Township Road 215, the following bearings and distances:

- 1. South 40 degrees 39 minutes 34 seconds West a distance of 86.59 feet to a 5/8" iron pin found;
- 2. South 38 degrees 37 minutes 44 seconds West a distance of 61.32 feet to a 5/8" iron pin found;

- 2. South 38 degrees 37 minutes 44 seconds West a distance of 61.32 feet to a 5/8" fron pin found;
 3. South 34 degrees 47 minutes 04 seconds West a distance of 56.38 feet to a 5/8" fron pin found;
 4. South 29 degrees 51 minutes 24 seconds West a distance of 61.76 feet to a 5/8" fron pin found;
 5. South 26 degrees 32 minutes 04 seconds West a distance of 68.64 feet to a 5/8" fron pin found;
 6. South 24 degrees 00 minutes 14 seconds West a distance of 169.00 feet to a 5/8" fron pin found;
 7. South 19 degrees 37 minutes 24 seconds West a distance of 54.23 feet to a 5/8" fron pin found;
 8. South 12 degrees 51 minutes 44 seconds West a distance of 50.42 feet to a 5/8" fron pin found;
 9. South 20 degrees 19 minutes 54 seconds West a distance of 36.86 feet to a 5/8" fron pin found;
 10. South 20 degrees 19 minutes 54 seconds West a distance of 36.86 feet to a 5/8" fron pin found;

- 10. South 20 degrees 19 minutes 54 seconds West a distance of 36.86 feet to a 5/8" iron pin found; 11. South 27 degrees 42 minutes 04 seconds West a distance of 51.57 feet to a 5/8" iron pin found; 12. South 31 degrees 57 minutes 04 seconds West a distance of 104.53 feet to a 5/8" iron pin found;
- 13. South 33 degrees 22 minutes 44 seconds West a distance of 91.97 feet to a 5/8" iron pin found;

Thence leaving the centerline of Township Road 215, North 55 degrees 14 minutes 38 seconds West a distance of 10.82 feet to a 5/8" iron pin found;

Thence North 55 degrees 44 minutes 06 seconds West a distance of 81.80 feet to a 5/8" iron pin found;

Thence South 34 degrees 15 minutes 24 seconds West a distance of 86.56 feet to a 5/8" iron pin found;

Thence North 71 degrees 28 minutes 16 seconds West a distance of 86.22 feet to a 5/8" iron pin

Thence North 71 degrees 28 minutes 16 seconds West a distance of 103.87 feet to a 5/8" iron pin

Thence North 60 degrees 27 minutes 46 seconds West a distance of 101.23 feet to a 5/8" iron pin found:

Thence North 60 degrees 27 minutes 46 seconds West a distance of 101.22 feet to a 5/8" iron pin found;

Thence North 60 degrees 27 minutes 46 seconds West a distance of 103.40 feet to a 5/8" iron pin found:

Thence North 60 degrees 27 minutes 46 seconds West a distance of 102.56 feet to a 5/8" iron pin found;

Thence North 34 degrees 15 minutes 25 seconds West a distance of 20.00 feet to a 5/8" iron pin

Thence North 36 degrees 25 minutes 26 seconds West a distance of 103.84 feet to a 5/8" iron pin found;

Thence North 25 degrees 14 minutes 36 seconds West a distance of 99.53 feet to a 5/8" iron pin found;

Thence North 25 degrees 14 minutes 36 seconds West a distance of 102.00 feet to a 5/8" iron pin found;

Thence South 34 degrees 15 minutes 24 seconds West a distance of 20.00 feet to a 5/8" iron pin found;

Thence North 35 degrees 45 minutes 56 seconds West a distance of 115.67 feet to a 5/8" iron pin

Thence North 35 degrees 45 minutes 56 seconds West a distance of 115.65 feet to a 5/8" iron pin found;

Thence North 35 degrees 45 minutes 56 seconds West a distance of 116.76 feet to a 5/8" iron pin found;

Thence North 34 degrees 15 minutes 24 seconds East a distance of 20.00 feet to a 5/8" iron pin

Thence North 14 degrees 59 minutes 26 seconds West a distance of 50.49 feet to a 5/8" iron pin found;

Thence North 03 degrees 02 minutes 14 seconds East a distance of 52.29 feet to a 5/8" iron pin found;

Thence North 05 degrees 07 minutes 54 seconds East a distance of 12.00 feet to a 5/8" iron pin found; Thence North 84 degrees 50 minutes 46 seconds West a distance of 12.00 feet to a 5/8" iron pin

found: Thence North 05 degrees 07 minutes 54 seconds East a distance of 87.56 feet to a 5/8" iron pin

found: Thence North 05 degrees 07 minutes 54 seconds East a distance of 99.57 feet to a 5/8" iron pin

found; Thence North 05 degrees 07 minutes 54 seconds East a distance of 100.00 feet to a 5/8" iron pin

Thence South 84 degrees 50 minutes 45 seconds East a distance of 12.00 feet to a 5/8" iron pin

Thence North 17 degrees 59 minutes 44 seconds East a distance of 98.32 feet to a 5/8" iron pin found:

Thence North 17 degrees 59 minutes 44 seconds East a distance of 71.00 feet to a 5/8" iron pin found;

Thence North 68 degrees 42 minutes 46 seconds West a distance of 226.36 feet to a 5/8" iron pin found in the centerline of a gravel road, passing a 5/8" iron pin found at a distance of 207.04 feet;

Thence North 72 degrees 19 minutes 43 seconds East a distance of 6.44 feet to a 5/8" iron pin found in the centerline of a gravel road;

Thence South 89 degrees 42 minutes 49 seconds East a distance of 424.25 feet to the point of beginning and containing 38.1306 acres, more or less, subject to the public easements of Township Road 217, Township Road 215 and any other public or private easements of record.

The above 38.1306 acre survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation and existing public roads. The reference bearing for this survey is the west line of the Southwest quarter of the Northeast quarter of Section 11 as North 00 degrees 31 minutes 44 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

All iron pins set by this survey are 5/8" X 30" and are capped by a 1-1/4" plastic identification cap stamped "SVE-8127".

The above described property was surveyed by S. Vince Evans, Ohio Registered Surveyor No. 8127, on September 30, 2002.

S. VINCE
EVANS
8127

ONAL SUR

PROTERED ON AL SUR

Vince Evans, P. S. 8127

/ nu

Surveyed by: SVE Surveying

S. Vince Evans, P. S. 8127 37381 Davis Chapel Road Logan, Ohio 43138 Phone (740) 380-3884 FAX (740) 380-0134

Creve

Approved - Mathematically Hocking County Engineer's Office

In CW DATE 10-25-02

Laurel Sec. 11 63.958.Ae.

Situated in Laurel Township, Hocking County, Ohio; being part of the South half of Section 11, Northwest corner Township 12, Range 18. of Lot 238 of Summit Haven Donald Canby Subdivision as John Sifford et.al. recorded in OR151-704 140-438 -Plat Book E, S89'49'18"E- 938.06 Page 10 \$80°28'35''W Lot 238 S18'01'01''W 121.82' Inc. Lot 24 Lot 240 151.41 N84°49'29''W Lot 239 Resort S84'49'29''E 153.77 10 14.00 -100.06 Lot 237 40, N84'49'29''W Section Section – 99.54° 22.00 Lot 235 \$5'10'21''W 299.14' TO Lodge 170.00'-Donald S. & Dee Ann Canby 233 - 99.54 S15'06'29''E OR212-1 389.65' TOTAL 531'44'59''E 200.53' TOTAL Tom Lloyd Ox) 44.65'-924 118-432 Jhn Baile OR48–° N34°16'41''E 28.00° 1/2x 175.00 100.21 223 221 M89"50"49"'W - S35'40'59''E 347.87 TOTAL 44.12 100.32 115.16 N14'45'53''E N31'47'35'E_{115.70} 40 41 15.29 0 S34*16'41''W N89'50'49"W- 1396.39' TOTAL N20"24"49"'W 20.00' 5 N34'16'41"E 75.00' Loi 51.14 102.70 1352.02 101 S25'09'09''E 66 202.37 TOTAL 43.37 670. Lot 207 99.67 Centerline of Township Road 217 Unkle Road Donald S. & Dee Ann Canby S36'34'09''E -w..00.00.0N 103.73 OR212-1 N34°16'41''E 20.00 Tom Lloyd Steinbrink -713 Noroo'd 102.61 560'45'29''E 206.06' TOTAL 118-432 63.958 Acres Brunneÿ 53_058 N89'57'05"W- 2725.41 S34'11'44''W 384.93 Martha OR182-7 Point of 00 OP15 Beginning Jerry 671 STATE OF ON Patty Lubensheimer and Charles and Jonathan Patton \aleph M..00.00.0N OR11-715, OR12-695 LARRY Approve Hocking John and OR109-384, 958 GERSTNER ENWB T S-6344 Count GIETTEM! Southwest corner of Section 11 17-18-11-18-11-18-11-18-11-18-11-18-11-18-11-18-11-18-11-18-11-18-11-18-11-18-11-18-11-18-11-18-11-18-11-18-1 8 LEGEND 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 9 REFERENCES: set ⊗ 1" OD iron pipe found Tax maps 0 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 Deed descriptions 200 400 Previous surveys Existing monumentation SCALE: previously set Existing public road = 400

REFERENCE BEARING:

West line of Section 11 as North O degrees 00 miutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 23rd day of October, 2001 and that the plat is a correct representation of the premises as described by said survey. P. Vente, premises as described by said survey. any

Surveyor No. 6344 Registered

Survey by:

Larry P. Gerstner — Engineering and Surveying 9 East Second Street, Suite A, Logan, Ohio 43138 (740) 385-4260

SURVEY DESCRIPTION OF A 63.958 ACRE TRACT FOR TOM LLOYD

Situated in Laurel Township, Hocking County, Ohio; being part of the South half of Section 11, Township 12, Range 18; and being more particularly described as follows:

Commencing for reference at a 1" OD iron pipe found at the Southwest corner of Section 11; thence with the West line of Section 11 North 0 degrees 00 minutes 00 seconds West a distance of 671.00 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence continuing with the West line of Section 11 North 0 degrees 00 minutes 00 seconds West a distance of 670.99 feet to a 5/8" iron pin set;

thence leaving the West line of Section 11 South 89 degrees 50 minutes 49 seconds East a distance of 1396.39 feet to a 5/8" iron pin set in the center of Township Road 217, Unkle Road, and passing a 5/8" iron pin set at a distance of 1352.02 feet;

thence with the center of said Township Road 217 the following three bearings and distances:

- 1) North 20 degrees 24 minutes 49 seconds West a distance of 51.14 feet to a 5/8" iron pin set;
- 2) North 14 degrees 45 minutes 53 seconds East a distance of 40.41 feet to a 5/8" iron pin set;
- 3) North 31 degrees 47 minutes 35 seconds East a distance of 15.29 feet to a 5/8" iron pin set; thence leaving the center of said Township Road 217 North 89 degrees 50 minutes 49 seconds West a distance of 44.12 feet to a 5/8" iron pin set;

thence North 0 degrees 26 minutes 21 seconds East a distance of 1241.40 feet to a 5/8" iron pin set; thence South 89 degrees 49 minutes 18 seconds East a distance of 938.06 feet to a 5/8" iron pin previously set;

thence South 80 degrees 28 minutes 35 second West a distance of 6.22 feet to a 5/8" iron pin previously set at the Northwest corner of Lot 238 of the Summit Haven Subdivision as recorded in Plat Book E, Page 10, as extended to the center of a private roadway;

thence with said private roadway center South 18 degrees 01 minute 01 second West a distance of 121.82 feet to a 5/8" iron pin previously set at the Northeast corner of Lot 241 of said Summit Haven Subdivision as extended to said private roadway center;

thence with the North, West, and South boundary of said Summit Haven Subdivision the following sixteen bearings and distances:

- 1) North 84 degrees 49 minutes 29 seconds West a distance of 153.77 feet to a 5/8" iron pin previously set at the Northwest corner of Lot 241;
- 2) South 49 degrees 01 minute 21 seconds West a distance of 151.41 feet to a 5/8" iron pin previously set at the Southwest corner of Lot 241;
- 3) South 84 degrees 49 minutes 29 seconds East a distance of 14.00 feet to a 5/8" iron pin previously set at the Northwest corner of Lot 239;
- 4) South 5 degrees 10 minutes 21 seconds West a distance of 299.14 feet to a 5/8" iron pin previously set at the Southwest corner of Lot 235 and passing 5/8" iron pins previously set at the Southwest corners of Lots 239 and 237 at distances of 100.06 feet and 199.60 feet;
- 5) North 84 degrees 49 minutes 29 seconds West a distance of 22.00 feet to a 5/8" iron pin previously set at the Northwest corner of Lot 233;
- 6) South 15 degrees 06 minutes 29 seconds East a distance of 389.65 feet to a 5/8" iron pin previously set at the South corner of Lot 231 and passing 5/8" iron pins previously set at the Southwest corner of Lot 233 and the Northwest corner of Lot 231 at distances of 170.00 feet and 214.65 feet;
- 7) South 31 degrees 44 minutes 59 seconds East a distance of 200.53 feet to a 5/8" iron pin previously set at the South corner of Lot 227 and passing a 5/8" iron pin previously set at the South corner of Lot 229 at a distance of 100.21 feet;
 - 8) North 34 degrees 16 minutes 41 seconds East a distance of 28.00 feet to a 5/8" iron pin

previously set at the West corner of Lot 225;

- 9) South 35 degrees 40 minutes 59 seconds East a distance of 347.87 feet to a 5/8" iron pin previously set at the South corner of Lot 221 and passing 5/8" iron pins previously set at the South corners of Lots 225 and 223 at distances of 117.01 feet and 232.71 feet;
- 10) South 34 degrees 16 minutes 41 seconds West a distance of 20.00 feet to a 5/8" iron pin previously set at the West corner of Lot 219;
- 11) South 25 degrees 09 minutes 09 seconds East a distance of 202.37 feet to a 5/8" iron pin previously set at the South corner of Lot 217 and passing a 5/8" iron pin previously set at the South corner of Lot 219 at a distance of 102.70 feet;
- 12) South 36 degrees 34 minutes 09 seconds East a distance of 103.73 feet to a 5/8" iron pin previously set at the South corner of Lot 215;
- 13) North 34 degrees 16 minutes 41 seconds East a distance of 20.00 feet to a 5/8" iron pin previously set at the Southwest corner of Lot 213;
- 14) South 60 degrees 45 minutes 29 seconds East a distance of 206.06 feet to a 5/8" iron pin previously set at the Southeast corner of Lot 211 and passing a 5/8" iron pin previously set at the Southeast corner of Lot 213 at a distance of 102.61 feet;
- 15) North 34 degrees 16 minutes 41 seconds East a distance of 75.00 feet to a 5/8" iron pin previously set at the Southwest corner of Lot 207;
- 16) South 67 degrees 38 minutes 49 seconds East a distance of 207.58 feet to a 5/8" iron pin previously set at the Southeast corner of Lot 207;

thence leaving said Summit Haven Subdivision South 34 degrees 11 minutes 44 seconds West a distance of 384.93 feet to a 5/8" iron pin previously set;

thence North 89 degrees 57 minutes 05 seconds West a distance of 2725.41 feet to the point of beginning, containing 63.958 acres more or less, and subject to the public easement of said Township Road 217 and any other public or private easements of record.

The above 63.958 acre survey is intended to describe part of the various tracts as deeded to Tom Lloyd, deed reference 118, Page 432, and part of the 41.293 acre tract as deeded to Donald S. and Dee Ann Canby, deed reference Volume OR212, Page 1, both of the Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 11 as North 0 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 23, 2001.


LARRY P. GERSTNER S-6344 ONAL SURVINO NAL SURVINO NAL

Approved - Mathematically Hocking County Engineer's Office

PATE 11-13-01

Survey by:

Larry P. Gerstner - Engineering and Surveying 9 East Second Street, Suite A, Logan, Ohio 43138 740-385-4260

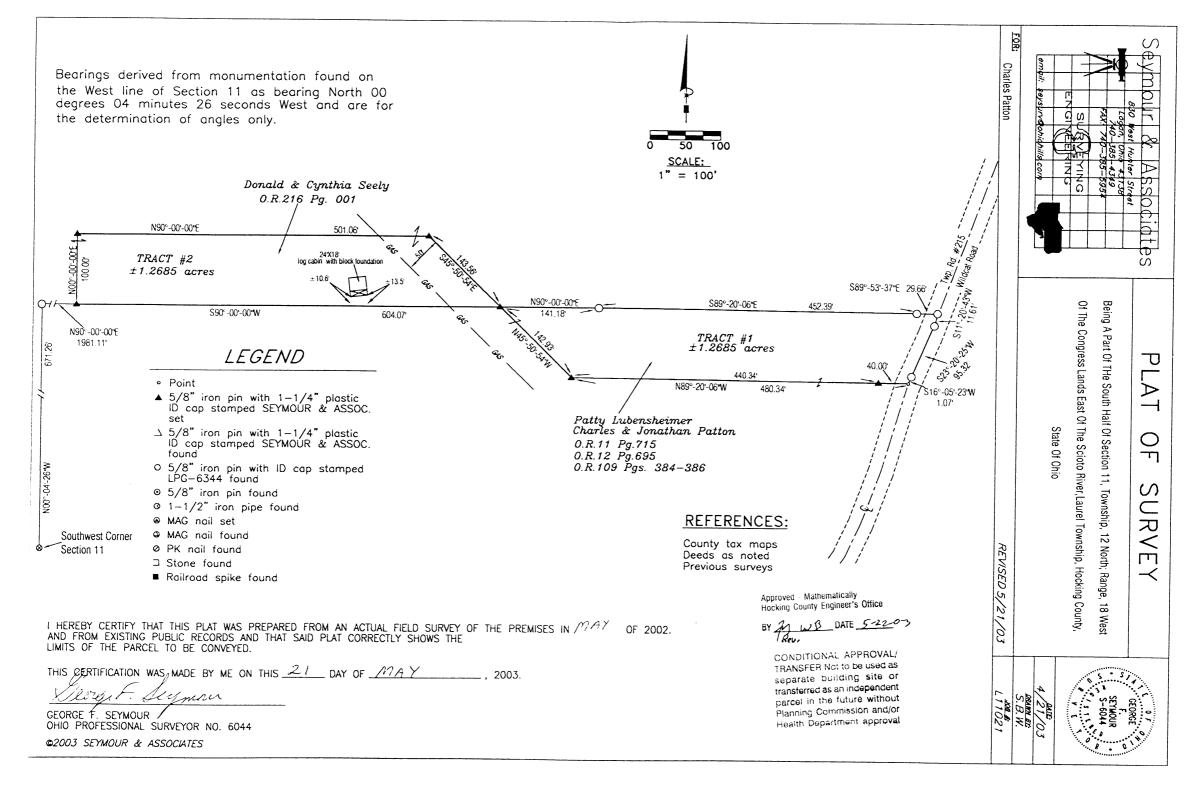

approva

EXHIBIT "A" TRACT 1 - 1.2685 ACRES

Being a part of a tract of land that is now or formerly in the name of Patty Lubensheimer and Charles and Jonathan Patton, as recorded in Official Record 11 at page 715, Official Record 12 at page 695 and Official Record 109 at pages 384-386, Hocking County Recorder's Office, said tract being part of the South half of Section 11, T12N, R18W, of The Congress Lands East of The Scioto River, Laurel Township, Hocking County, State of Ohio, and being more particularly described as follows:

Beginning for reference at 1 1/2" iron pipe found at the Southwest quarter of Section 11, T12N, R18W;

Thence along the West line of Section 11, North 00 degrees 04 minutes 26 seconds West a distance of 671.26 feet to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found on the Grantor's Northwest corner;

Thence along the Grantor's North line, North 90 degrees 00 minutes 00 seconds East a distance of 1,981.11 feet to a 5/8" X 30" iron pin with a plastic identification cap set;

Thence continuing along the Grantor's North line, North 90 degrees 00 minutes 00 seconds East a distance of 604.07 feet to a 5/8" X 30" iron pin with a plastic identification cap set, said pin being the principle place of beginning of the tract herein described;

Thence continuing along the Grantor's North line, North 90 degrees 00 minutes 00 seconds East a distance of 141.18 feet to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found;

Thence continuing along the Grantor's North line, South 89 degrees 20 minutes 06 seconds East a distance of 452.39 feet to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found;

Thence continuing along the Grantor's North line, South 89 degrees 53 minutes 37 seconds East a distance of 29.66 feet to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found in the centerline of Wildcat Road (Township Road 215);

Thence along the centerline of said road, the following three courses:

- 1. South 11 degrees 20 minutes 43 seconds West a distance of 11.61 feet to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found;
- 2. South 23 degrees 20 minutes 25 seconds West a distance of 95.32 to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found, and;
- 3. South 16 degrees 05 minutes 23 seconds West a distance of 1.07 feet to a point;

Thence leaving said road, and through the Grantor's land, North 89 degrees 20 minutes 06 seconds West, passing through a 5/8" X 30" iron pin with a plastic identification cap set at 40.00 feet, going a total distance of 480.34 feet to a 5/8" X 30" iron pin with a plastic identification cap set;

Thence North 45 degrees 50 minutes 54 seconds West a distance of 142.93 feet to the principle place of beginning containing 1.2685 acres, more or less, and subject to the right-of-way of Wildcat Road (Township Road 215) and all easements of record.

All 5/8" X 30" iron pins with plastic identification caps set are stamped "Seymour & Associates".

The bearings used in the above described tract were derived from monumentation found on the West line of Section 11 as bearing North 00 degrees 04 minutes 26 seconds West and are for the determination of angles only.

The above described tract was surveyed by George F. 6044, in December of 2002.

GEORGE F. George F. Seymour, P.S. 6044

GEORGE F. SEYMOUR
S-6044 Seymour, Ohio Professional Surveyor No.

EXHIBIT "A" TRACT 1I – 1.2685 ACRES

Being a part of a tract of land that is now or formerly in the name of Donald and Cynthia Seely, as recorded in Official Record 216 at page 001, Hocking County Recorder's Office, said tract being part of the South half of Section 11, T12N, R18W, of The Congress Lands East of The Scioto River, Laurel Township, Hocking County, State of Ohio, and being more particularly described as follows:

Beginning for reference at 1 1/2" iron pipe found at the Southwest quarter of Section 11, T12N, R18W;

Thence along the West line of Section 11, North 00 degrees 04 minutes 26 seconds West a distance of 671.26 feet to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found;

Thence along the Grantor's South line, North 90 degrees 00 minutes 00 seconds East a distance of 1,981.11 feet to a 5/8" X 30" iron pin with a plastic identification cap set, said pin being the principle place of beginning of the tract herein described;

Thence leaving the Grantor's South line, North 00 degrees 00 minutes 00 seconds East a distance of 100.00 feet to a 5/8" X 30" iron pin with a plastic identification cap set;

Thence North 90 degrees 00 minutes 00 seconds East a distance of 501.06 feet to a 5/8" X 30" iron pin with a plastic identification cap set;

Thence South 45 degrees 50 minutes 54 seconds East a distance of 143.56 feet to a 5/8" X 30" iron pin with a plastic identification cap set on the Grantor's South line;

Thence along the Grantor's South line, South 90 degrees 00 minutes 00 seconds West a distance of 604.07 feet to the point of beginning containing 1.2685 acres, more or less, and subject to all easements of record.

All 5/8" X 30" iron pins with plastic identification caps set are stamped "Seymour & Associates".

The bearings used in the above described tract were derived from monumentation found on the West line of Section 11 as bearing North 00 degrees 04 minutes 26 seconds West and are for the determination of angles only.

The above described tract was surveyed by George F. Seymour, Ohio Professional Surveyor No. 6044, in December of 2002.

GEORGE F. SEYMOUR

CONAL SURING

Approved - Mathematically Hocking County Engineer's Office

BY 1 WB DATE 5-22-03

CONDITIONAL APPROVAL/ TRANSFER Not to be used as separate building site or transferred as an independent parcel in the future without Planning Commission and/or rhealth. Department approval

George F. Seymour, P.S. 6044

1

Date

Seymour & Associates 830 W. Hunter St. Logan, Ohio 43138

EXHIBIT "A" TRACT 1I – 1.1001 ACRES

Being a part of a tract of land that is now or formerly in the name of Donald and Cynthia Seely, as recorded in Official Record 216 at page 001, Hocking County Recorder's Office, said tract being part of the South half of Section 11, T12N, R18W, of The Congress Lands East of The Scioto River, Laurel Township, Hocking County, State of Ohio, and being more particularly described as follows:

Beginning for reference at 1 1/2" iron pipe found at the Southwest quarter of Section 11, T12N, R18W;

Thence along the West line of Section 11, North 00 degrees 04 minutes 26 seconds West a distance of 671.26 feet to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found;

Thence along the Grantor's South line, North 90 degrees 00 minutes 00 seconds East a distance of 2,200.74 feet to a 5/8" X 30" iron pin with a plastic identification cap set, said pin being the principle place of beginning of the tract herein described;

Thence leaving the Grantor's South line, North 00 degrees 00 minutes 00 seconds East a distance of 100.00 feet to a 5/8" X 30" iron pin with a plastic identification cap set;

Thence North 90 degrees 00 minutes 00 seconds East a distance of 464.10 feet to a 5/8" X 30" iron pin with a plastic identification cap set;

Thence South 16 degrees 47 minutes 33 seconds East a distance of 104.45 feet to a 5/8" X 30" iron pin with a plastic identification cap set on the Grantor's South line;

Thence along the Grantor's South line, South 90 degrees 00 minutes 00 seconds West a distance of 494.28 feet to the point of beginning containing 1.1001 acres, more or less, and subject to all easements of record.

All 5/8" X 30" iron pins with plastic identification caps set are stamped "Seymour & Associates".

The bearings used in the above described tract were derived from monumentation found on the West line of Section 11 as bearing North 00 degrees 04 minutes 26 seconds West and are for the determination of angles only.

The above described tract was surveyed by George F. Seymour, Ohio Professional Surveyor No. 6044, in December of 2002.

Approved - Mathematically Hocking County Engineer's Office

BY MUBDATE 5-8-03

Georgé F. Seymour, P.S. 604

GEORGE F. SEYMOUR S-6044

Da

Seymour & Associ 830 W. Hunter St. Logan, Ohio 43138 (740) 385—4349

EXHIBIT "A" TRACT 1 – 1.1001 ACRES

Being a part of a tract of land that is now or formerly in the name of Patty Lubensheimer and Charles and Jonathan Patton, as recorded in Official Record 11 at page 715, Official Record 12 at page 695 and Official Record 109 at pages 384-386, Hocking County Recorder's Office, said tract being part of the South half of Section 11, T12N, R18W, of The Congress Lands East of The Scioto River, Laurel Township, Hocking County, State of Ohio, and being more particularly described as follows:

Beginning for reference at 1 1/2" iron pipe found at the Southwest quarter of Section 11, T12N, R18W;

Thence along the West line of Section 11, North 00 degrees 04 minutes 26 seconds West a distance of 671.26 feet to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found on the Grantor's Northwest corner;

Thence along the Grantor's North line, North 90 degrees 00 minutes 00 seconds East a distance of 2,200.74 feet to a 5/8" X 30" iron pin with a plastic identification cap set;

Thence continuing along the Grantor's North line, North 90 degrees 00 minutes 00 seconds East a distance of 494.28 feet to a 5/8" X 30" iron pin with a plastic identification cap set, said pin being the principle place of beginning of the tract herein described;

Thence continuing along the Grantor's North line, North 90 degrees 00 minutes 00 seconds East a distance of 31.34 feet to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found;

Thence continuing along the Grantor's North line, South 89 degrees 20 minutes 06 seconds East a distance of 452.39 feet to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found;

Thence continuing along the Grantor's North line, South 89 degrees 53 minutes 37 seconds East a distance of 29.66 feet to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found in the centerline of Wildcat Road (Township Road 215);

Thence along the centerline of said road, the following three courses:

- 1. South 11 degrees 20 minutes 43 seconds West a distance of 11.61 feet to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found;
- 2. South 23 degrees 20 minutes 25 seconds West a distance of 95.32 to a 5/8" iron pin with a plastic identification cap stamped "LPG-6344" found, and;
- 3. South 16 degrees 05 minutes 23 seconds West a distance of 1.07 feet to a point;

Thence leaving said road, and through the Grantor's land, North 89 degrees 20 minutes 06 seconds West, passing through a 5/8" X 30" iron pin with a plastic identification cap set at 40.00 feet, going a total distance of 442.86 feet to a 5/8" X 30" iron pin with a plastic identification cap set;

Thence North 16 degrees 47 minutes 33 seconds West a distance of 104.45 feet to the principle place of beginning containing 1.1001 acres, more or less, and subject to the right-of-way of Wildcat Road (Township Road 215) and all easements of record.

All 5/8" X 30" iron pins with plastic identification caps set are stamped "Seymour & Associates".


The bearings used in the above described tract were derived from monumentation found on the West line of Section 11 as bearing North 00 degrees 04 minutes 26 seconds West and are for the determination of angles only.

The above described tract was surveyed by George F. Seymour, Ohio Professional Surveyor No. 6044, in December of 2002.

SEYMOUR

George F. Seymour, P.S. 6044

MAY 5 2003

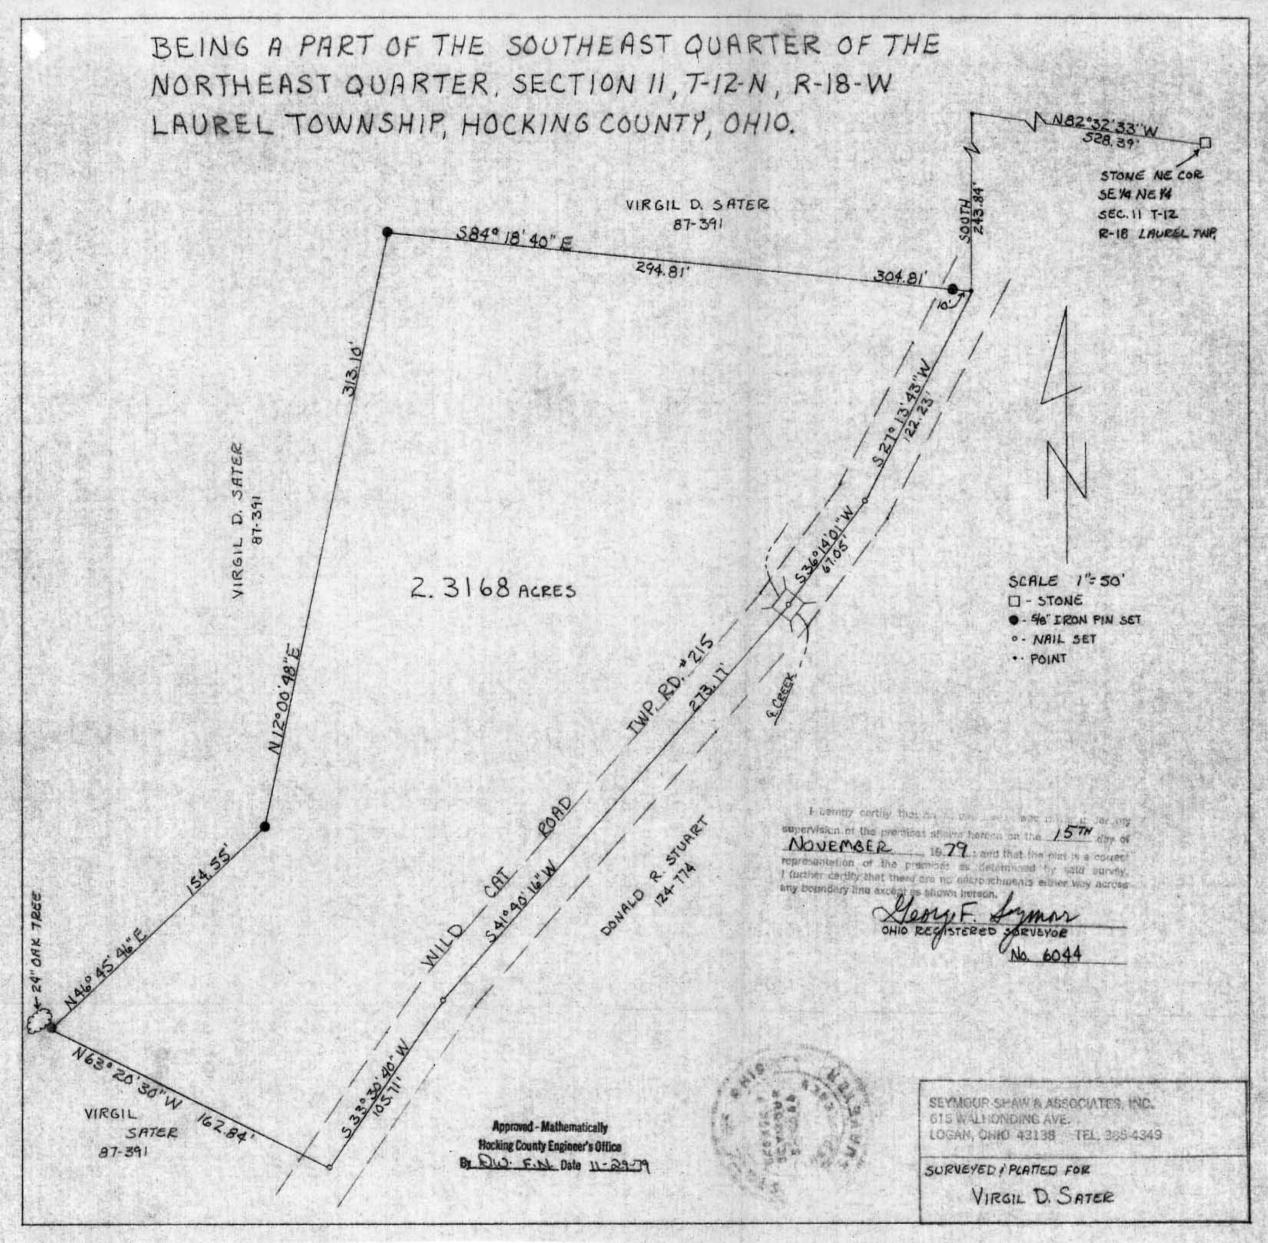

Land Twp. Sec. 11

Seymour-Shaw & Associates, Inc.

Consulting Engineers & Surveyors

WILLIAM R. SHAW, P.E. GEORGE F. SEYMOUR, P.S.

PHONE 614 - 385-4349 615 WALHONDING AVE. LOGAN, OHIO 43138

Description of Survey for Virgil Sater

Being a part of the northeast quarter of Section 11, T12N, P18W, Laurel Township, Hocking County, State of Ohio, and more particularly described as follows:

Beginning, for reference, at a stone found on the northeast corner of the southeast quarter of the northeast quarter of

Section 11, T12N, R18W;

Thence North 82° 32' 33" West a distance of 528.39 feet to

a point;

Thence South a distance of 243.84 feet to a point in the e center of Township Road 215 said point being the principal place of beginning of the tract herein described;

Thence with the center of said road the following four

(1) South 27° 13' 43" West a distance of 122.23 feet to a nail,

(2) South 36° 14' 01" West a distance of 67.05 feet to a nail in the bridge,

(3) South $4\tilde{1}^{\circ}$ 40° 16° West a distance of 273.17 feet to a nail, (4) South 33° 30' 40" West a distance of 105.71 feet to a nail;

Thence leaving the center of said road, North 63° 20' 30" West a distance of 162.84 feet to a 5/8" iron pin set in the root of a 24" oak tree;

Thence North 46° 45' 46" East a distance of 154.55 feet to

a 5/8" iron pin;

Thence North 12° 00' 48" East a distance of 313.10 feet to

a 5/8" iron pin;


Thence South 84° 18' 40" East, passing through a 5/8" iron pin set at 294.81 feet, going a total distance of 304.81 feet to the principal place of beginning, containing 2.3168 acres, more or less, subject to the right of way of Township Road 215 and all easements of record.

The above described tract was surveyed by Ceorge F. Seymour, Ohio Pegistered Surveyor No. 6044, November 15, 1979.

Approved - Mathematically Hocking County Engineer's Office 8r DW. F.N Date H-29-79 Leoy & Symour

PLAT OF 55.27 ACRE TRACT FOR TOM LLOYD

SITUATED IN LAUREL TOWNSHIP . HOCKING COUNTY , DHID : BEING PART OF THE NORTHWEST QUARTER OF THE SOUTHEAST QUARTER OF THE SOUTHEAST QUARTER, PART OF THE NORTH HALF OF THE SOUTHWEST QUARTER OF THE SOUTHWEST QUARTER OF THE NORTH-EAST QUARTER ALL OF SECTION II , TOWNSHIP IX , PANGE 18.

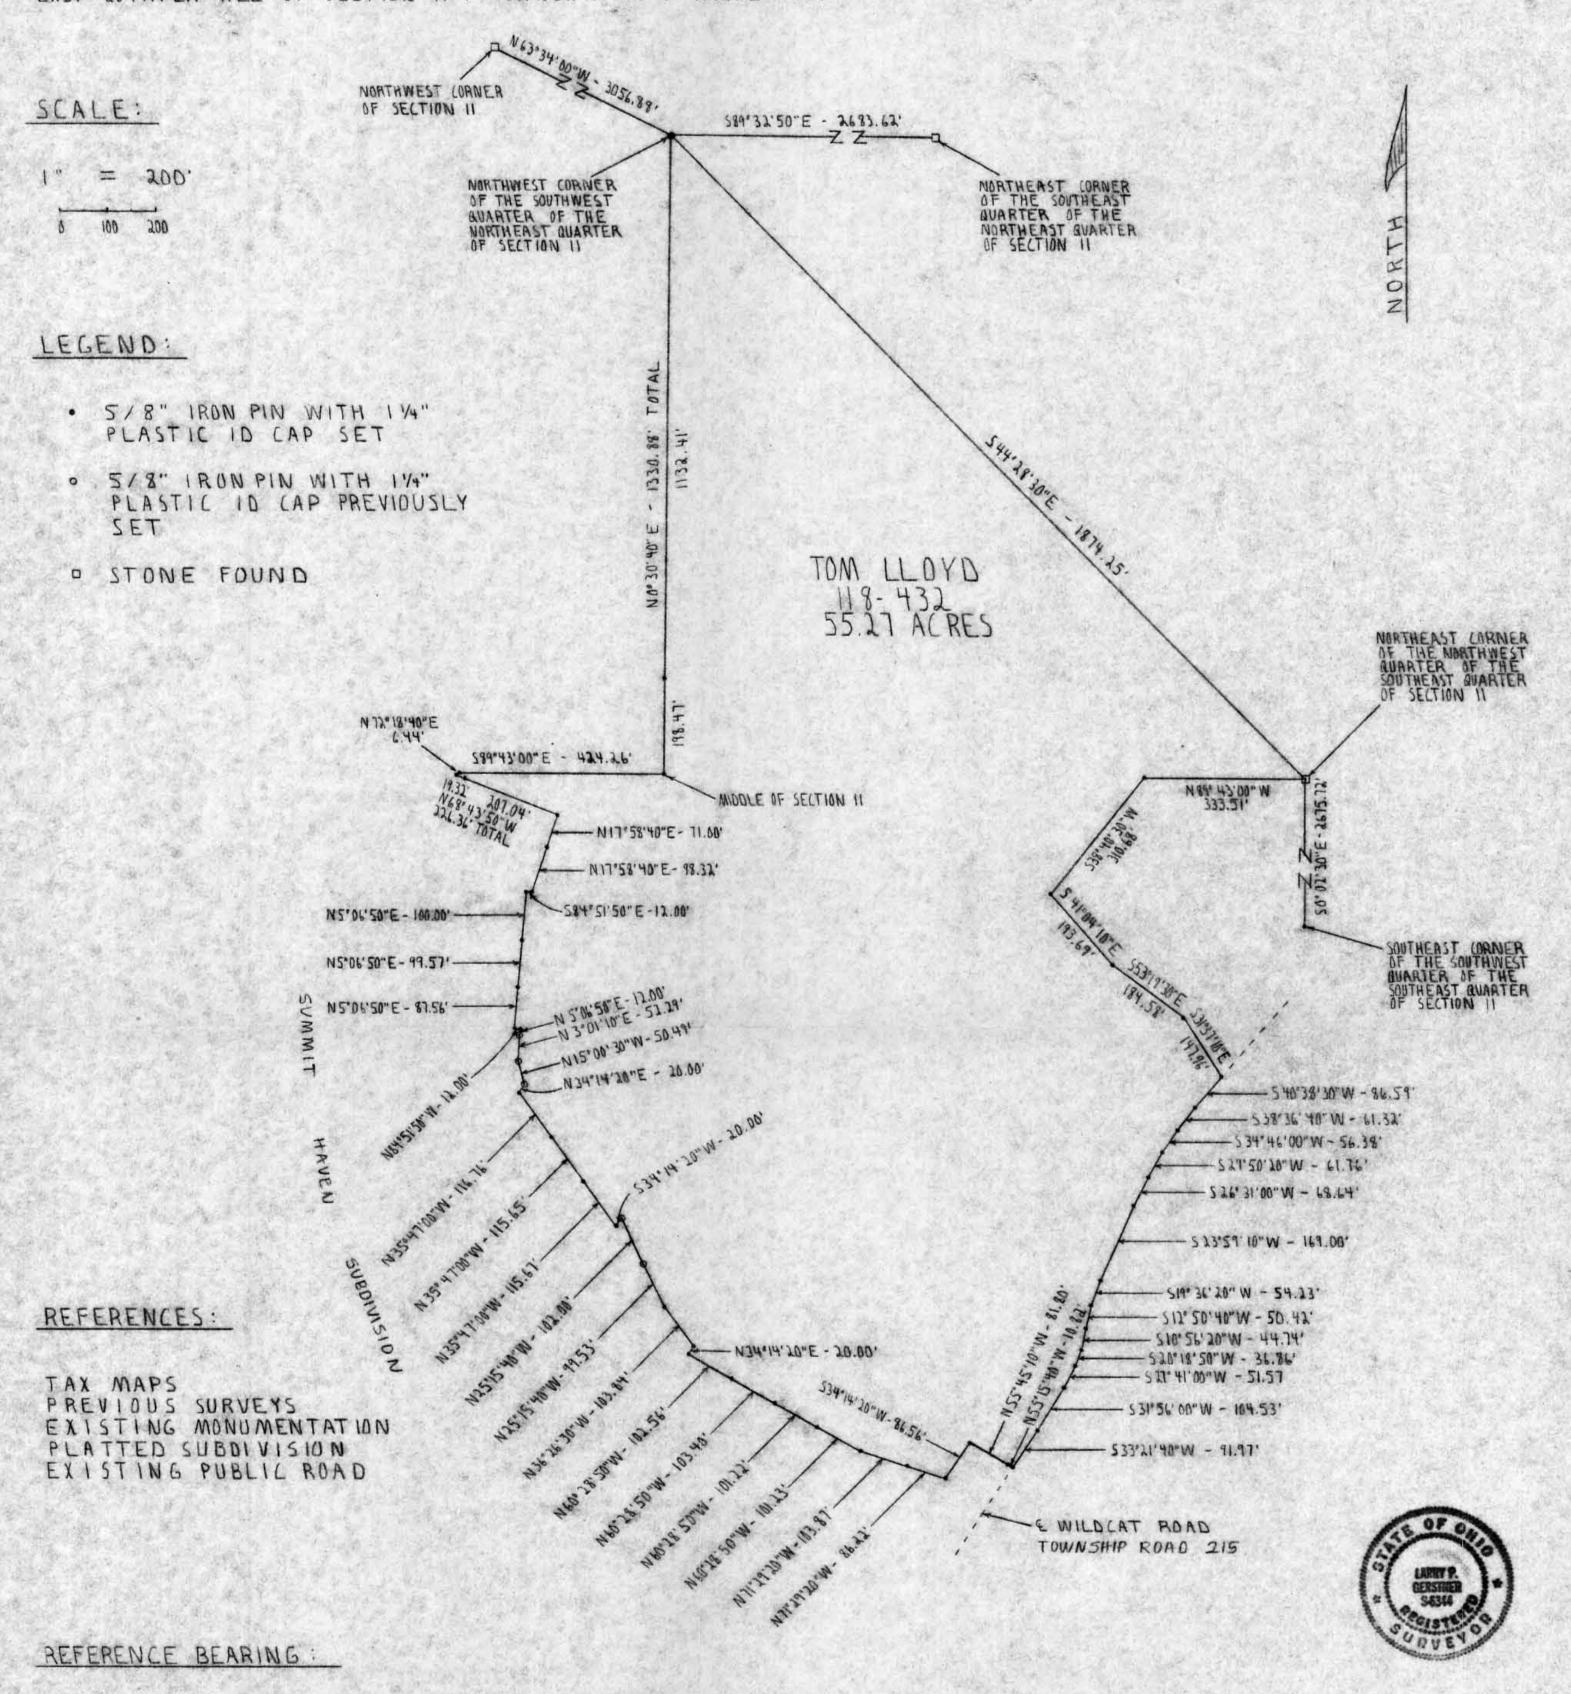

WEST LINE OF SECTION II AS SOUTH O DEGREES DO MINUTES OD SECONDS EAST.

I HEREBY CERTIFY THAT AN ACTUAL SURVEY WAS MADE UNDER MY SUPERVISION OF THE PREMISES SHOWN HEREON ON THE JOTH DAY OF DELEMBER, 1991 AND THAT THE PLAT IS A CORRECT REPRESENTATION OF THE PREMISES AS DESRIBED BY SAID SURVEY.

Approved - Mathematically
Hosking County Engineer's office
By Par Fry Date 12-26-91

REGISTERED SURVEYOR NO. 6344

SURVEY BY:

Situated in Laurel Township, Hocking County, Ohio; being part of the Northwest quarter of the Southeast quarter, part of the North half of the Southwest quarter of the Southeast quarter, part of the Northeast quarter of the Southwest quarter, and part of the Southwest quarter of the Northeast quarter, all of Section 11, Township 12, Range 18; and being more particularly described as follows:

Beginning at a stone found at the Northeast corner of the Northwest quarter of the Southeast quarter of Section 11 from which a 5/8" iron pin found at the Southeast corner of the Southwest quarter of the Southeast quarter of Section 11 bears South 0 degrees 02 minutes 30 seconds East at a distance of 2675.72 feet;

thence North 89 degrees 43 minutes 00 seconds West a distance of 333.51 feet to a 5/8" iron pin set;

thence South 38 degrees 40 minutes 30 seconds West a distance of 310.68 feet to a 5/8" iron pin set;

thence South 41 degrees 04 minutes 10 seconds East a distance of 193.69 feet to a 5/8" iron pin set;

thence South 53 degrees 19 minutes 30 seconds East a distance of 184.58 feet to a 5/8" iron pin set;

thence South 31 degrees 37 minutes 10 seconds East a distance of 147.96 feet to a 5/8" iron pin set in the center of Township Road 215, Wildcat Road;

thence with the center of said Township Road 215 the, following thirteen bearings and distances:

- 1) South 40 degrees 38 minutes 30 seconds West a distance of 86.59 feet to a 5/8" iron pin set;
- 2) South 38 degrees 36 minutes 40 seconds West a distance of 61.32 feet to a 5/8" iron pin set:
- 3) South 34 degrees 46 minutes 00 seconds West a distance of 56.38 feet to a 5/8" iron pin set;
- 4) South 29 degrees 50 minutes 20 seconds West a distance of 61.76 feet to a 5/8" iron pin set;
- 5) South 26 degrees 31 minutes 00 seconds West a distance of 68.64 feet to a 5/8" iron pin set;
- 6) South 23 degrees 59 minutes 10 seconds West a distance of 169.00 feet to a 5/8" iron pin set;
- 7) South 19 degrees 36 minutes 20 seconds West a distance of 54.23 feet to a 5/8" iron pin set;
- 8) South 12 degrees 50 minutes 40 seconds West a distance of 50.42 feet to a 5/8" iron pin set;
- 9) South 10 degrees 56 minutes 20 seconds West a distance of 44.74 feet to a 5/8" iron pin set:
- 10) South 20 degrees 18 minutes 50 seconds West a distance of 36.86 feet to a 5/8" iron pin set;
- 11) South 27 degrees 41 minutes 00 seconds West a distance of 51.57 feet to a 5/8" iron pin set:
- 12) South 31 degrees 56 minutes 00 seconds West a distance of 104.53 feet to a 5/8" iron pin set;
- 13) South 33 degrees 21 minutes 40 seconds West a distance of 91.97 feet to a 5/8" iron pin set;

thence leaving the center of said Township Road 215 North

55 degrees 15 minutes 40 seconds West a distance of 10.82 feet to a 5/8" iron pin set at the platted East corner of Summit Haven Subdivision as recorded in Plat Book E, Page 10, Hocking County Recorder's Office:

thence with the edge of said Summit Haven Subdivision the following twenty-eight bearings and distances:

- 1) North 55 degrees 45 minutes 10 seconds West a distance of 81.80 feet to a 5/8" iron pin set;
- 2) South 34 degrees 14 minutes 20 seconds West a distance of 86.56 feet to a 5/8" iron pin set;
- 3) North 71 degrees 29 minutes 20 seconds West a distance of 86.22 feet to a 5/8" iron pin set;
- 4) North 71 degrees 29 minutes 20 seconds West a distance of 103.87 feet to a 5/8" iron pin set;
- 5) North 60 degrees 28 minutes 50 seconds West a distance of 101.23 feet to a 5/8" iron pin set;
- 6) North 60 degrees 28 minutes 50 seconds West a distance of 101.22 feet to a 5/8" iron pin set;
- 7) North 60 degrees 28 minutes 50 seconds West a distance of 103.40 feet to a 5/8" iron pin set:
- 8) North 60 degrees 28 minutes 50 seconds West a distance of 102.56 feet to a 5/8" iron pin set;
- 9) North 34 degrees 14 minutes 20 seconds East a distance of 20.00 feet to a 5/8" iron pin set;
- 10) North 36 degrees 26 minutes 30 seconds West a distance of 103.84 feet to a 5/8" iron pin set;
- 11) North 25 degrees 15 minutes 40 seconds West a distance of 99.53 feet to a 5/8" iron pin previously set;
- 12) North 25 degrees 15 minutes 40 seconds West a distance of 102.00 feet to a 5/8" iron pin previously set;
- 13) South 34 degrees 14 minutes 20 seconds West a distance of 20.00 feet to a 5/8" iron pin set;
- 14) North 35 degrees 47 minutes 00 seconds West a distance of 115.67 feet to a 5/8" iron pin set;
- 15) North 35 degrees 47 minutes 00 seconds West a distance of 115.65 feet to a 5/8" iron pin set;
- 16) North 35 degrees 47 minutes 00 seconds West a distance of 116.76 feet to a 5/8" iron pin set;
- 17) North 34 degrees 14 minutes 20 seconds East a distance of 20.00 feet to a 5/8" iron pin previously set;
- 18) North 15 degrees 00 minutes 30 seconds West a distance of 50.49 feet to a 5/8" iron pin previously set;
- 19) North 3 degrees 01 minutes 10 seconds East a distance of 52.29 feet to a 5/8" iron pin previously set;
- 20) North 5 degrees 06 minutes 50 seconds East a distance of 12.00 feet to a 5/8" iron pin set;
- 21) North 84 degrees 51 minutes 50 seconds West a distance of 12.00 feet to a 5/8" iron pin set;
- 22) North 5 degrees 06 minutes 50 seconds East a distance of 87.56 feet to a 5/8" iron pin set;
- 23) North 5 degrees 06 minutes 50 seconds East a distance of 99.57 feet to a 5/8" iron pin set;
- 24) North 5 degrees 06 minutes 50 seconds East a distance of 100.00 feet to a 5/8" iron pin set;
- 25) South 84 degrees 51 minutes 50 seconds East a distance of 12.00 feet to a 5/8" iron pin set;

26) North 17 degrees 58 minutes 40 seconds East a distance of 98.32 feet to a 5/8" iron pin set:

27) North 17 degrees 58 minutes 40 seconds East a distance

of 71.00 feet to a 5/8" iron pin set;

28) North 68 degrees 43 minutes 50 seconds West a distance of 226.36 feet to a 5/8" iron pin set and passing a 5/8" pin set at a distance of 207.04 feet:

thence leaving said Summit Haven Subdivision North degrees 18 minutes 40 seconds East a distance of 6.44 feet to 5/8" iron pin set;

thence South 89 degrees 43 minutes 00 seconds distance of 424.26 feet to a 5/8" iron pin set in the middle of Section 11:

thence North 0 degrees 30 minutes 40 seconds distance of 1330.88 feet to a 5/8" iron pin set Northwest corner of the Southwest quarter of the Northeast quarter of Section 11, passing a 5/8" iron pin set a distance of 198.47 feet, from which a stone found at iron pin set at a Northwest corner of Section 11 bears North 63 degrees minutes 00 seconds West at a distance of 3056.88 feet, and a stone found at the Northeast corner of the Southeast quarter the Northeast quarter of Section 11 bears South 89 degrees minutes 50 seconds East at a distance of 2683.62 feet:

thence South 44 degrees 28 minutes 30 seconds East distance of 1874.25 feet to the point of beginning containing 55.27 acres more or less, subject to the public easement of said Township Road 215 and any private easements of record.

The above 55.27 acre survey is intended to describe part of the various tracts of land in Section 11 as deeded to Tom M. Lloyd by deed reference Volume 118, Page 432, Hocking County Recorder's Office. This survey was based upon information from tax maps, previous surveys, existing monumentation, an existing subdivision, and an existing road. The reference bearing for this survey is the West line of Section 11 as South 0 degrees 00 minutes 00 seconds East. All iron pins set by this survey or previously set are capped by a 1-1/4" plastic identification cap. The above described by a 1-1/4" plastic identification cap. The property was surveyed by Larry P. Gerstner, Surv.

Surv.

LARRY P


GERS Ohio Registered Surveyor No. 6344, on December 20, 1991.

Approved - Mathematically Hocking County Engineer's office By K. FK Date 12-26-9

Survey by:

Larry P. Gerstner - Engineering and Surveying 119 West Main Street, Logan, Ohio 43138 385-4260

Jany P. Denter

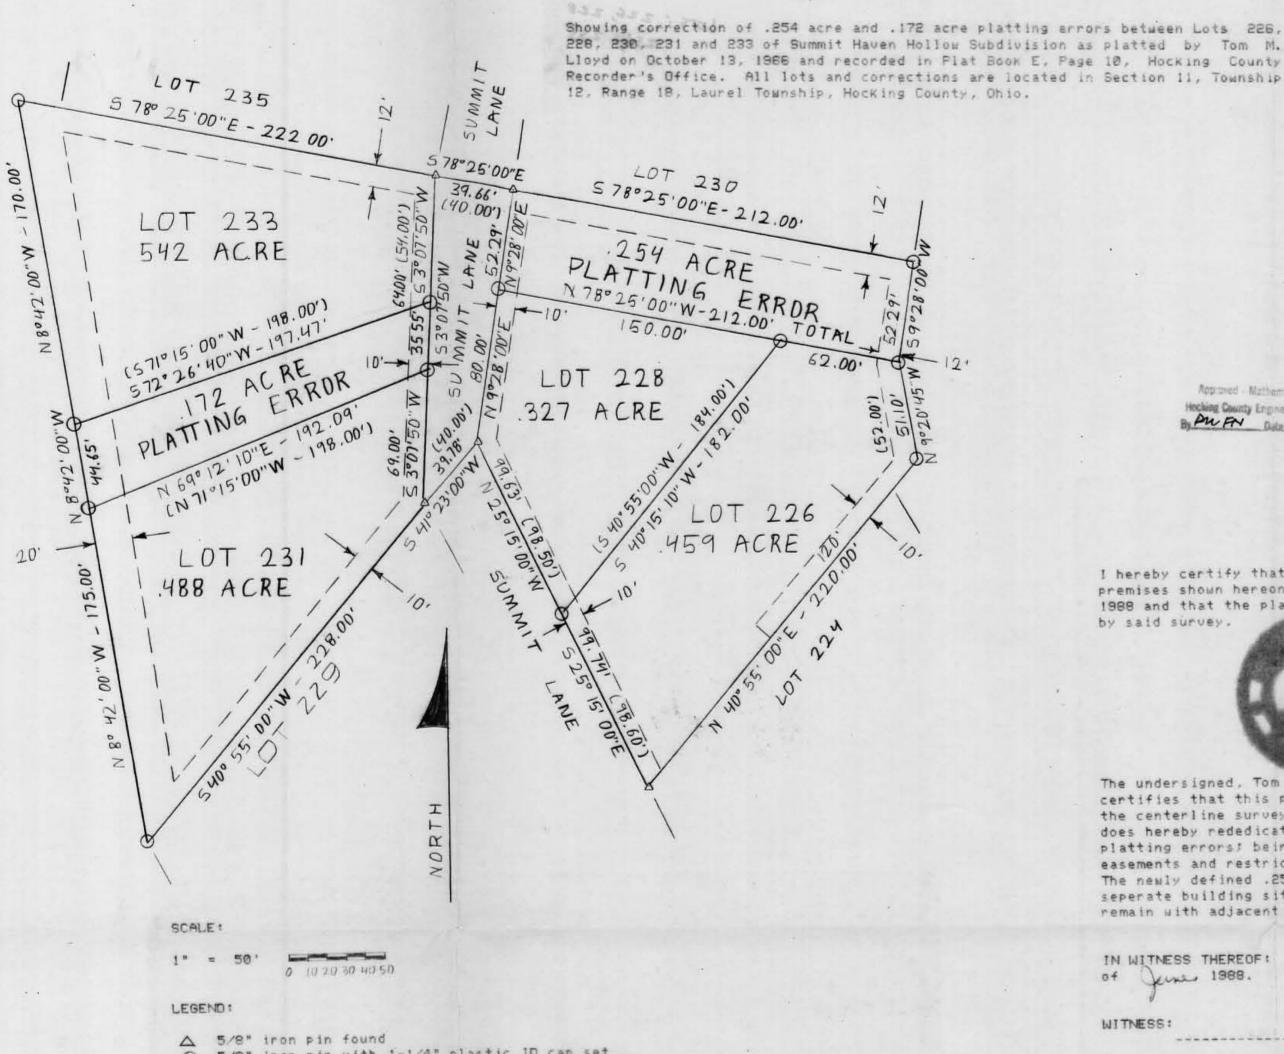

O 5/8" iron pin with 1-1/4" plastic ID cap set

REFERENCES:

Tax maps Previous surveys Existing monumentation Platted subdivision

REFERENCE BEARING:

Plat of Summit Haven Hollow Subdivision.


NOTES!

1) Platted bearings or distances when different from actual field measurements

are shown in parenthesis. 2) All lots and adjacent areas shown are owned by Tom M. Lloyd by deed reference Volume 118, Page 432 except Lots 229 and 231 which are owned by Thomas Billhimer by deed reference Volume 192, Page 598

3) By the original plat all lots must be conveyed to the centerline of Summit Lane except for Lot 228 and the .254 acre platting error, which must be conveyed to the West line of Summit Lane.

Survey by: Larry P. Gerstner - Engineering and Surveying of Logan, Ohio



I hereby certify that actual surveys were made under my supervision of the premises shown hereon on the 25th day of April, 1988 and the 2nd day of May, 1988 and that the plat is a correct representation of the premises as described by said survey.

The undersigned, Tom M. Lloyd, 26500 Wildcat Road, Rockbridge, Ohio 43149, certifies that this plat correctly represents his solution to a error found in the centerline survey for which Summit Haven Hollow Subdivision was based and he does hereby rededicate the areas in error as both .254 acre and .172 acre platting errors; being a part of said subdivision and subject to all of its easements and restrictions as the areas are within the intended original plat. The newly defined .254 acre and .172 acre platting errors are not intended to be seperate building sites or transferred as separate parcels, but must always remain with adjacent tracts.

IN WITNESS THEREOF:	Tom M.	Lloyd	has	hereunto	set	his	hand	this	20	d
1					-1		m-	Llo		1
WITNESS:				6	too	21	150	xlo	40	K
				T	om M.	Lic	oyd	6	/	

THE STATE OF OHIO:

HOCK ING COUNTY:

BEFORE ME, a Notary Public in and for said State, personally appeared the aforenamed Tom M. Lloyd who acknowledges that he did sign the foregoing instrument and that the same is his free act and deed. IN TESTIMONY WHEREOF, I have hereunto set my hand and official seal, at Logan, Ohio, this 20 day of June, A.D. 1988.


My Commission Expires:

For dedication of original plat see Plat Book 'E', Page 10 Recieved for record this 20 day of June

Recorder, Hocking County, Ohio Recorded this 20 day of June , 1988 in Plat Book G , Page 55 Fee 21.60 : File No 72966

Plat Cabinel #1, Page 164-A

PLAT OF A 12.896 ACRE TRACT

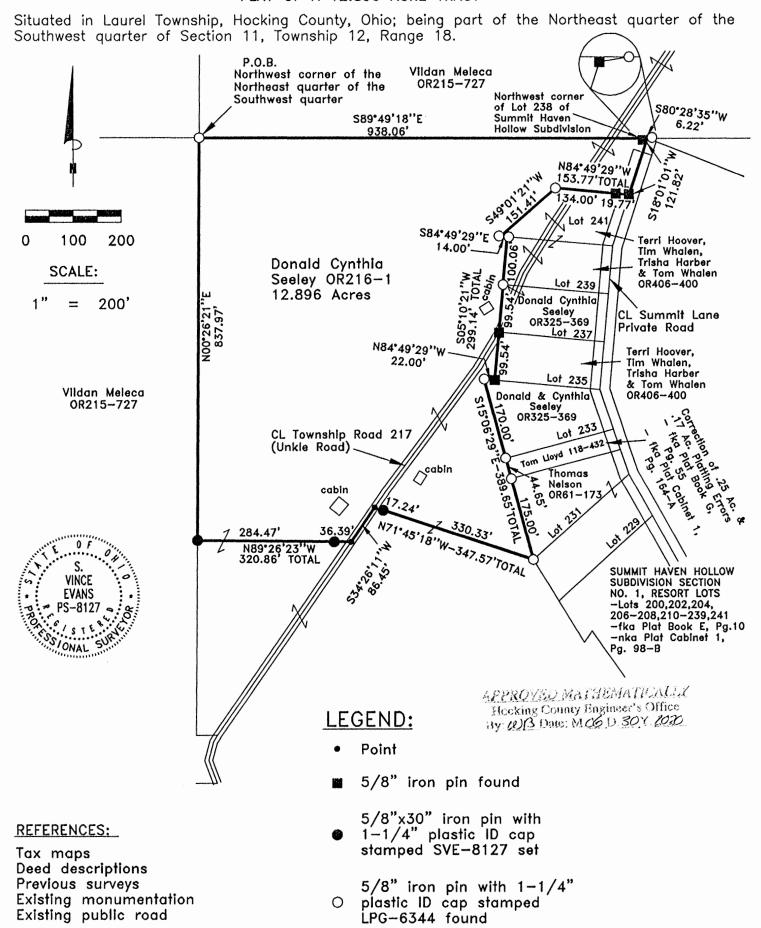

REFERENCE BEARING:

The north line of the Southwest quarter as South 89 degrees 49 minutes 18 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 23rd day of June, 2020 and that the plat is a correct representation of the premises as described by said survey.

Les lus Registered Surveyor No. 8127

Survey by:

S. Vince Evans Surveying — S. Vince Evans P.S. 8127 64103 Woodgeard Road, Creola, Ohio 45622 Phone (740) 380—3884 FAX (740) 596—5831

SURVEY DESCRIPTION OF A 12.896 ACRE TRACT

Situated in Laurel Township, Hocking County, Ohio; being part of the Northeast quarter of the Southwest quarter of Section 11, Township 12, Range 18; and being more particularly described as follows:

Being part of a 63.958 acre tract as described in Volume OR216, Page 1 to Donald Cynthia Seeley; Beginning at a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found at the Northwest corner of the Northeast quarter of the Southwest quarter;

Thence with the north line of the Southwest quarter, South 89 degrees 49 minutes 18 seconds East a distance of 938.06 feet to a 5/8" iron pin found;

Thence South 80 degrees 28 minutes 35 seconds West a distance of 6.22 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found at the Northwest corner of Lot 238 of Summit Haven Hollow Subdivision;

Thence South 18 degrees 01 minutes 01 seconds West a distance of 121.82 feet to a 5/8" iron pin found at the Northeast corner of Lot 241;

Thence crossing Township Road 217 (Unkle Road), North 84 degrees 49 minutes 29 seconds West a distance of 153.77 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found at the Northwest corner of Lot 241, passing a 5/8" iron pin found at a distance of 19.77 feet;

Thence South 49 degrees 01 minutes 21 seconds West a distance of 151.41 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found at the Southwest corner of Lot 241;

Thence South 84 degrees 49 minutes 29 seconds East a distance of 14.00 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found at the Northwest corner of Lot 239;

Thence South 05 degrees 10 minutes 21 seconds West a distance of 299.14 feet to a 5/8" iron pin found at the Southwest corner of Lot 235, passing a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found at a distance of 100.06 feet at the Southwest corner of Lot 239, and passing a 5/8" iron pin found at the Southwest corner of Lot 237 and in the centerline of Township Road 217 (Unkle Road) at a distance of 199.60 feet;

Thence North 84 degrees 49 minutes 29 seconds West a distance of 22.00 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found at the Northwest corner of Lot 233;

Thence South 15 degrees 06 minutes 29 seconds East a distance of 389.65 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found at the Southwest corner of Lot 231, passing 5/8" iron pins with 1-1/4" plastic ID caps stamped LPG-6344 found at distances of 170.00 feet at the Southwest corner of Lot 233 and 214.65 feet at the Northwest corner of Lot 231;

Thence North 71 degrees 45 minutes 18 seconds West a distance of 347.57 feet to a Point in the centerline of Township Road 217 (Unkle Road), passing a 5/8" iron pin set at a distance of 330.33 feet:

Thence with the centerline of Township Road 217 (Unkle Road), South 34 degrees 26 minutes 11 seconds West a distance of 86.45 feet to a Point;

Thence leaving the centerline of Township Road 217 (Unkle Road), North 89 degrees 26 minutes 23 seconds West a distance of 320.86 feet to a 5/8" iron pin set, passing a 5/8" iron pin set at a distance of 36.39 feet;

Thence North 00 degrees 26 minutes 21 seconds East a distance of 837.97 feet to the point of beginning and containing 12.896 acres, more or less, subject to any public or private easements of record.

The above 12.896 acre survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and existing public roads (Summit Haven Hollow Subdivision Section No. 1, Resort Lots - fka Plat Book E, Pg. 10 -nka Plat Cabinet 1, Pg. 98-B). The reference bearing for this survey is the north line of the Southwest quarter as South 89 degrees 49 minutes 18 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped "SVE-8127".

The above described property was surveyed by S. Vince Evans, Ohio Registered Surveyor No. 8127, on June 23, 2020.

S. Vince Evans, P. S. 8127


Survey by: S. Vince Evans Surveying S. Vince Evans, P. S. 8127 64103 Woodgeard Road Creola, Ohio 45622 Phone (740) 380-3884 APPROVED MATHEMATICALLA Mocking County Engineer's Office By WB Onte: M 06 D.30 Y 2020


PS-8127 s

BEING A PART OF THE NORTHEAST QUARTER OF THE SOUTHEAST QUARTER, OF SECTION 11, TOWNSHIP-12, RANGE-18, LAUREL TOWNSHIP, HOCKING COUNTY, STATE OF OHIO.

LEGEND

- 5/8"x30" iron pin set w/ 1-1/4" plastic ID cap stamped CTS-6844
- 5/8" iron pin found w/ 1-1/4" plastic ID cap stamped LPG-6344 \blacktriangle
- 0 5/8" iron pin found
- stone found
- mag nail set



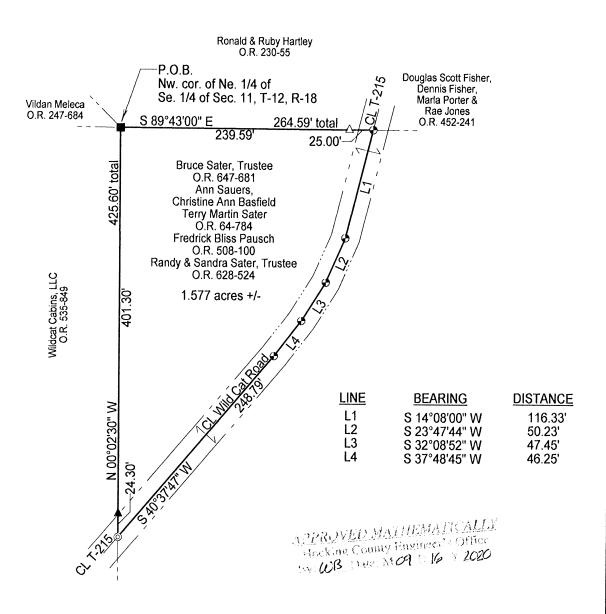

REFERENCES Current Tax Plats Previous surveys: (5.00 ac.+/- tract by Larry Gerstner 12-12-1991) Deeds: as noted Aerial Photographs

Note: Bearings are based on the West line of the Northeast 1/4 of the Southeast 1/4 of Section 11 as N 00°02'30" W as per a previous survey by Larry P. Gerstner on December 12th, 1991

> All iron pins set are 5/8"X30" rebar with 1-1/4" plastic ID cap stamped "CTS-6844".

Surveyed & platted by: C. Thomas Smith Ohio Professional Surveyor No 6844 P.O. Box 1152 Logan, Ohio 43138 740-949-2524 ctssurveying@gmail.com



Plat prepared from an actual survey made on the 4th day of June, 2020 by,

C. Thomas Smith

Ohio Professional Surveyor No. 6844

Description for Tim Black

Being a part of a tract of land transferred to Bruce Sater, Trustee Official Record Volume 647 page 681, Ann Sauers, Christine Ann Basfield, Terry Martin Sater Official Record Volume 64 page 784, Fredrick Bliss Pausch Offical Record Volume 508 page 100, Randy and Sandra Sater, Trustee Official Record Volume 628 page 524, Hocking County Recorder's Office, Hocking County, Ohio, being a part of the Northeast Quarter of the Southeast Quarter of Section 11, Township-12, Range-18, Laurel Township, Hocking County, State of Ohio and more particularly described as follows;

Beginning at a stone found being the Northwest corner of the Northeast Quarter of the Southeast Quarter of said Section 11, T-12, R-18;

Thence along the North line of the Northeast Quarter of the Southeast Quarter of said Section 11 also being the South line of a tract transferred to Ronald and Ruby Hartley as recorded in Official Records Volume 230 at page 55 South 89°43'00" East passing a 5/8" iron pin set at a distance of 239.59 feet and going a total distance of 264.59 feet to a mag nail set being a point in the centerline of Township Road 215 (Wild Cat Road);

Thence leaving said North line and along said centerline the following five courses;

- 1. South 14°08'00" West a distance of 116.33 feet to a mag nail set:
- 2. South 23°47'44" West a distance of 50.23 feet to a mag nail set;
- 3. South 32°08'52" West a distance of 47.45 feet to a mag nail set;
- 4. South 37°48'45" West a distance of 46.25 feet to a mag nail set;
- 5. South 40°37'47" West a distance of 248.79 feet to a 5/8" iron pin found being a point on the boundary of a tract transferred to Wildcat Cabins, LLC as recorded in Official Records Volume 535 at page 849;

Thence leaving said centerline and along said boundary, also being the West line of the Northeast Quarter of the Southeast Quarter North 00°02'30" West passing a 5/8" iron pin found with 1-1/4" plastic ID cap stamped LPG-6344 at a distance of 24.30 feet and going a total distance of 425.60 feet to the principal point of beginning containing 1.577 acres more of less subject to all legal easements and rights of way.

Bearings based on the West line of the Northeast Quarter of the Southeast Quarter of Section 11 as North 00°02'30" West as per a previous survey by Larry P. Gerstner on December 12th, 1991.

All iron pins set are 5/8" X 30" with a 1 1/4" plastic I.D. cap stamped "CTS-6844".

The above description was prepared from an actual survey completed on the 4th day of June, 2020, by C. Thomas Smith, Ohio Professional Surveyor, No. 6844.

Ohio Professional Surveyor No. 6844

APPROVED MATCHEMOLIC DE LA SURVEY COUNTY PROSINCE S'S OFFICE BY WBDate: M. P.D. 16, Y. 2020