CONSTRUCTION

FOR DESIGN DESIGNATION SEE SHEET NO.2

STATE OF OHIO
DEPARTMENT OF TRANSPORTATION

HOC – 328 – 4.07

HOC–328–4.07	OHIO	1/33
	FHWA REGION 5	
BRS–916 (2)	FEDERAL PROJECT	

STARR TOWNSHIP
HOCKING COUNTY

BRS–916 (2)

CONVENTIONAL SIGNS

County Line
Township Line
Section Line
Corporation Line or
Fence Line(existing) (proposed)
Center Line 352 353
Trees, Stumps, (to be removed)
Utility Poles: Telephone, Power, Light
Limited Access (only) LA
Right of Way (only) RW
Limited Access & Right of Way LA&RW
Existing Right of Way
Property Line (in existing fence)
Railroad or
Guardrail (existing) (proposed)

INDEX OF SHEETS

TITLE SHEET	1
SCHEMATIC PLAN	2
TYPICAL SECTION	3
DRIVES TYPICAL SECTION	4
GENERAL NOTES & PAVEMENT ELEVATIONS	5 – 6
GENERAL SUMMARY & REFERENCE POINTS	7
CALCULATIONS	8
EARTHWORK & SEEDING	9
MISCELLANEOUS DETAILS	10
PLAN & PROFILE	11 – 12
CROSS SECTIONS	13 – 22
DRIVE DETAILS	23 – 27
TRAFFIC SHEET	28
RIGHT OF WAY	29 – 33

LINE DATA

BEGIN PROJECT	STA. 215+00
END PROJECT	STA. 231+00
ADDITION/DEDUCTION	NONE

LENGTH = 1600 LIN. FT.– OR 0.303 MILES

BEGIN WORK	STA. 213+50
END WORK	STA. 232+00
ADDITION/DEDUCTION	NONE

LENGTH = 1850 LIN. FT. OR 0.350 MILES

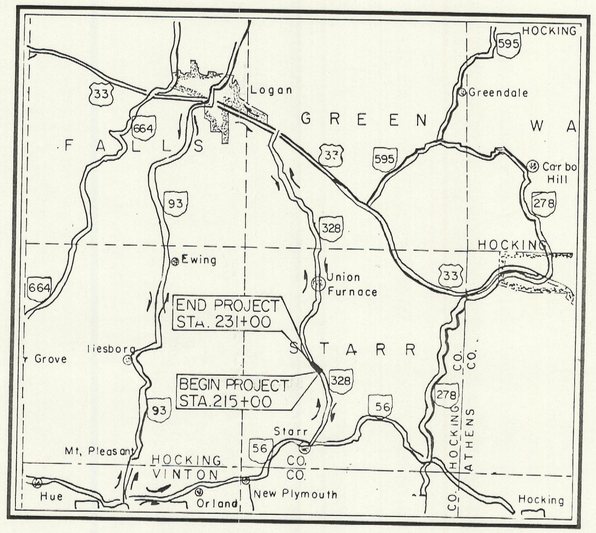

LOCATION MAP

SCALE IN MILES
0 4 8

Portion to be Improved
State & Federal Routes
Other Roads
Detour

SCALES

Plan: 0 25 50 100
Profile: Horizontal 0 5 10 20, Vertical 0 5 10 20
Cross Section: Horizontal 0 5 10 20, Vertical 0 5 10 20

1987 SPECIFICATIONS

The standard specifications of the State of Ohio, Department of Transportation, including changes and supplemental specifications listed in the proposal shall govern this improvement.

I hereby approve these plans and declare that the making of this improvement will not require the closing to traffic of the highway, except as noted on Sheet 6, and that provisions for the maintenance and safety of traffic will be as set forth on the plans and estimates.

UNDERGROUND UTILITIES
TWO WORKING DAYS
BEFORE YOU DIG
Call...800–362–2764 (Toll Free)
OHIO UTILITIES PROTECTION SERVICE
NON–MEMBERS
MUST BE CALLED DIRECTLY

SUPPLEMENTAL SPECIFICATIONS

847	10–17–83
947	10–17–83
802	5–4–88

SUPPLEMENTAL PRINTS OF STANDARD CONSTRUCTION DRAWINGS

BP–2	1–11–85	TC 41.20	3–26–79		
BP–5	10–1–87	TC 42.20	3–26–79		
BP–6	10–1–87	TC 52.10	4–3–79		
GR–1	1–11–85	MT 99.10	11–14–86		
GR–2B	2–5–82				
GR–4	2–5–82				
CB–5	11–10–83				
HW–4A	4–1–80				
HW–4B	4–1–80				
MC–1	6–13–69				
MC–4	7–26–76				
MC–11	8–1–78				

Approved Joseph L. Leach, P.E.
Date 7-1-88 District Deputy Director of Transportation

Approved
Date Engineer, Bureau of Bridges and Structural Design

Approved
Date Chief Engineer, Planning and Design

Approved
Date Director, Department of Transportation

Plan Prepared By:
DISTRICT NO.10
OHIO DEPARTMENT OF TRANSPORTATION

SEAL

Project:
Date of Letting 19 Contract No.

DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION
APPROVED:

DIVISION ADMINISTRATOR DATE

HOH328TI