FHWA REGION	STATE	PROJECT	
5	OHIO		

HOC-56-01.44
STATE JOB NO. 10635(0)

STATE OF OHIO
DEPARTMENT OF TRANSPORTATION

HOC-56-01.44

SALT CREEK TOWNSHIP
HOCKING COUNTY

BRS-823(6)

"ACQUIRING AGENCY STATE OF OHIO"

DESIGN DESIGNATION

D	50/50
Current ADT (1987)	1266
Design Year (2007)	1586
DHV	238
T	8%
Design Speed	55 MPH *
Legal Speed	55 MPH

* Design Exception Noted on Sheet 2

1987 SPECIFICATIONS

The standard specifications of the State of Ohio, Department of Transportation, including changes and supplemental specifications listed in the proposal shall govern this improvement.

I hereby approve these plans and declare that the making of this improvement will not require the closing to traffic of the highway and that provisions for the maintenance and safety of the traffic will be as set forth on these plans and estimates.

Approved _____
Date _____ District Deputy Director of Transportation

Approved _____
Date _____ Engineer, Bureau of Bridges and Structural Design

Approved _____
Date _____ Assistant Deputy Director, Real Estate Administration

Approved _____
Date _____ Director, Department of Transportation

CONVENTIONAL SIGNS

County Line
Township Line
Section Line
Corporation Line ____ or
Fence Line (existing) (proposed)
Center Line 581 582
Trees , Stumps , (to be removed)
Utility Poles: Telephone, Power, Light

Limited Access (only) LA
Right of Way (only) RW
Limited Access & Right of Way LA & RW
Existing Right of Way
Property Line (in existing fence)
Guardrail (existing) (proposed)

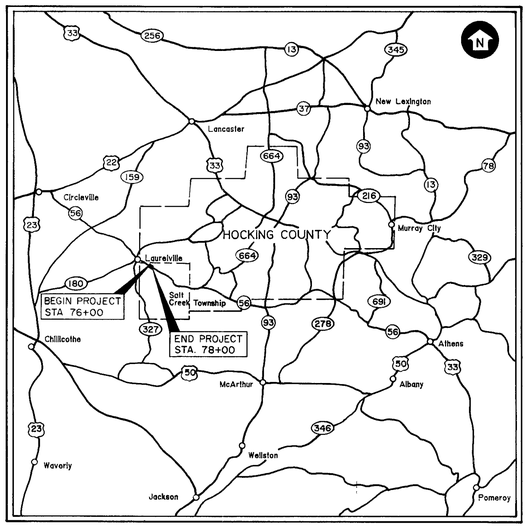

LOCATION MAP
0 9 Miles 18 Miles 27 Miles

Portion to be improved
State & Federal Routes
Other Routes

SCALES
Plan 0' 10' 20'
Profile Horizontal 0' 10' 20' Vertical 0' 5'
Cross Sections Horizontal 0' 5' Vertical 0' 5'

INDEX OF SHEETS

Title Sheet
Right of Way Plan 1

LINE DATA

Begin Project Sta. 76+00
End Project Sta. 78+00
Length of Project = 200 L.F. or =0.038 Miles

Begin Work Sta. 75+75
End Work Sta. 78+90
Length of Work = 315 L.F. or = 0.060 Miles

SUPPLEMENTAL PRINTS OF STANDARD CONSTRUCTION DRAWINGS					
GR-1	1-11-85	DBR-2-73	4-10-73		
GR-2B	2-5-85	AS-1-81	11-27-81		
GR-3	1-21-85	PSBD-1-81	9-18-81		
GR-4	2-5-82				
GR-4A	1-30-84				
MC-4	7-26-76				

SUPPLEMENTAL SPECIFICATIONS	
SS 836	11-12-85

UNDERGROUND UTILITIES
2 WORKING DAYS NOTICE
BEFORE YOU DIG
CALL 800-362-2764
TOLL FREE
OHIO UTILITIES PROTECTION SERVICE
NON-MEMBERS MUST BE CALLED DIRECTLY

Plan Prepared by:
Clyde E. Williams & Assoc. Inc.
130 E. Wilson Bridge Rd., Suite 025
Worthington, Ohio 43085
Abdul-Wadood A. Haider

SEAL

DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

APPROVED
_____ DIVISION ADMINISTRATOR
DATE

Project: HOC-56-01.44
Date of Letting: _____ 19____, Contract No. _____